




User Manual

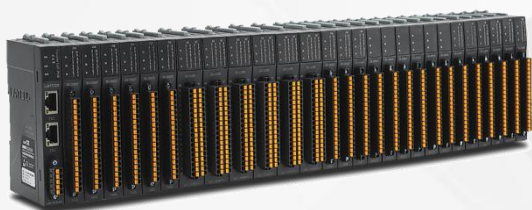

Lamina Series wafer type IO module

PROFINET_RT protocol

ETHERNET/IP protocol

CC-LINK IE FIELD BASIC protocol

ETHERCAT protocol

MODBUS TCP protocol

Distributed IO Module

version information

version number	Revision date	Imprint	modifier
V1.00	2022.01.20	Release version	Liu Xiaofeng
V1.01	2022.04.15	Add ES-3087A,ES-3088A module	offshore
V1.02	2022.07.13	Increase ES-1320D,ES-2321D,ES-2322D,ES-2308D Module	Liu Xiaofeng
V1.03	2023.5.20	Add ES-04PM module	Luo Shiping
V1.04	2023.06.20	Add ES-3043A,ES-4043A,ES-3047A module	Liu Xiaofeng
V1.05	2023.7.19	Add ES-2041D,ES-2042D,LUC-MTB,ES-04DMA module	Liu Xiaofeng
V1.06	2024.1.5	Add ES-02HC,ES-02MB-485,ES-02MB-232 module	Liu Xiaofeng
V1.07	2024.8.16	Add ES-2163D module	Liu Xiaofeng
V1.08	2024.12.30	Naming rules for adding modules	wutong
V1.09	2025.04.02	Add ES-3026A、 ES-3026B module	Liu Xiaofeng

Ownership Information

This document may not be redistributed, in whole or in part, in paper or electronic form without the consent of the copyright owner.

Statement denying or limiting responsibility

This document is intended only to assist the reader in the use of the product, and the Company is not responsible for damages or errors arising from the use of the information contained in this document. The products and texts described in this document are under continuous development and improvement. Wuxi Lingke Automation Co., Ltd. reserves the right to modify this document without notice to the user.

Instructions for using the document

This document describes the functional specifications, installation, operation and setup of the product, as well as the contents of the relevant network protocols. It is intended for use by trained electrical automation engineers only.

Patent Description

The designer of this product has applied for patent protection for the appearance of the product and the method of technical realization, and any attempt to copy, imitate, or reverse-engineer the design may violate the law.

Security Matters

This product is specialized equipment for use in industrial settings and should only be used by personnel with experience in electrical operation. Please read this manual carefully before use and follow the instructions to avoid injury to personnel or damage to the product.

This product is designed to meet IP20 protection level, and when used, it needs to be installed in a power distribution cabinet with dust and moisture-proof function.

Software Download

Please visit the official website of Wuxi Linke Automation Technology Co., Ltd. www.latcos.cn to download

CATALOGUE

1. Product Overview	11
1.1 Product Characterization	13
1.1.1 LUC Series Coupler Module - Dimension Drawing (120*17*99mm)	13
1.1.2 ES Series Expansion Modules - Dimensional Drawing (120 * 17 * 99.22mm)	13
1.1.3 ES Series Expansion Modules - Dimensional Drawing (120 * 25 * 99.22mm)	14
1.1.4 Mounting method (DIN35 rail mounting)	14
2. Network coupler module	15
2.1 LUC-PNB	16
2.1.1 Module overview	16
2.1.2 Introduction to interfaces	17
2.1.3 LED indicators	18
2.1.4 System Status Indication The operating status of the system is described in Table	18
2.1.5 The operating status of the backplane indication system is described in the table below	18
2.1.6 RJ45 indicator	19
2.1.7 PROFINET coupler communication interface definition	19
2.1.8 Electrical wiring diagram for PROFINET coupler	20
2.1.9 Network topology	21
2.2 LUC-EPB	23
2.2.1 Module overview	23
2.2.2 Introduction to interfaces	24
2.2.3 LED indicators	25
2.2.4 System Status Indication The operating status of the system is described in Table	25
2.2.5 The operating status of the backplane indication system is described in the table below	25
2.2.6 RJ45 indicator light	26
2.2.7 ETHERNET/IP Coupler Communication Interface Definition	26
2.2.8 ETHERNET/IP Coupler Electrical Wiring Diagrams	27
2.2.9 Network topology	28
2.3 LUC-CEB	30
2.3.1 Module overview	30
2.3.2 Introduction to interfaces	31
2.3.3 LED indicators	32
2.3.4 System Status Indication The operating status of the system is described in Table	32
2.3.5 The operating status of the backplane indication system is described in the table	32
2.3.6 RJ45 indicator light	33
2.3.7 CC-Link IE Field Basic Coupler Communication Interface Definition	33
2.3.8 Electrical Wiring Diagram for CC-Link IE Field Basic Coupler	34
2.3.9 Network topology	35
2.4 LUC-EAB	37
2.4.1 Module overview	37
2.4.2 Introduction to interfaces	38
2.4.3 LED indicators	39

2.4.4 System Status Indication The operating status of the system is described in Table	39
2.4.5 The operating status of the backplane indication system is described in the table below.	39
2.4.6 RJ45 indicator light	40
2.4.7 ETHERCAT Coupler Communication Interface Definition	40
2.4.8 Electrical wiring diagram for ETHERCAT coupler	41
2.4.9 Network topology	41
2.5 LUC-MTB	42
2.5.1 Module overview	42
2.5.2 Introduction to interfaces	43
2.5.3 LED indicators	44
2.5.4 System Status Indication The operating status of the system is described in Table	44
2.5.5 The operating status of the backplane indication system is described in the table below.	44
2.5.6 RJ45 indicator light	45
2.5.7 Modbus-TCP Coupler Communication Interface Definition	45
2.5.8 Modbus-TCP Coupler Electrical Wiring Diagrams	46
2.5.9 Network topology	47
3. Extension modules	49
3.1 ES-1160D (16-channel digital input module)	50
3.1.1 Module overview	50
3.1.2 Module parameters	50
3.1.3 Introduction to interfaces	51
3.1.4 LED indicators	52
3.1.5 The operating status of the backplane indication system is described in the table below.	52
3.1.6 Input status indication	52
3.1.7 Definition of terminal blocks	53
3.1.8 Wiring diagram	54
3.1.9 Process data definitions	54
3.1.10 Configuration parameter definitions	54
3.2 ES-1320D (32-channel digital input module)	55
3.2.1 Module overview	55
3.2.2 Module parameters	55
3.2.3 Introduction to Interfaces	56
3.2.4 LED indicators	57
3.2.5 The operating status of the backplane indication system is described in the table below.	57
3.2.6 Input status indication	57
3.2.7 Definition of terminal blocks	58
3.2.8 Wiring diagram	59
3.2.9 Process data definitions	59
3.2.10 Configuration parameter definitions	59
3.3 ES-2161/ES-2162D(16-channel digital transistor output module)	60
3.3.1 Module overview	60
3.3.2 Module parameters	60
3.3.3 Introduction to interfaces	61

3.2.4 LED indicators	62
3.3.5 The operating status of the backplane indication system is described in the table below.	62
3.3.6 Output status indication	62
3.3.7 Definition of terminal blocks	63
3.3.8 Wiring diagram	64
3.3.9 Process data definitions	64
3.3.10 Configuration parameter definitions	65
3.4 ES-2321/ES-2322D (32-channel digital transistor output module)	67
3.4.1 Module overview	67
3.4.2 Module parameters	67
3.4.3 Introduction to interfaces	68
3.2.4 LED indicators	69
3.4.5 The operating status of the backplane indication system is described in the table below.	69
3.4.6 Output status indication	69
3.4.7 Definition of terminal blocks	70
3.4.8 Wiring diagram	71
3.4.9 Process data definitions	71
3.4.10 Configuration parameter definitions	72
3.5 ES-2083D (8-channel digital relay output module)	74
3.5.1 Module overview	74
3.5.2 Module parameters	74
3.5.3 Introduction to interfaces	75
3.5.4 LED indicators	76
3.5.5 The operating status of the backplane indication system is described in the table below.	76
3.5.6 Output status indication	76
3.5.7 Definition of terminal blocks	77
3.5.8 Wiring diagram	78
3.5.9 Process data definitions	78
3.5.10 Configuration parameter definitions	79
3.6 ES-2163D (16-channel Digital Relay Output Module)	81
3.6.1 Module Overview	81
3.6.2 Module parameters	81
3.6.3 Introduction to interfaces	82
3.6.4 LED indicators	83
3.6.5 The description of the working status of the back panel indication system is as follows in the table.	83
3.6.6 Output status indication	83
3.6.7 Terminal connection definition	84
3.6.8 Wiring diagram	85
3.6.9 Process data definition	85
3.6.10 Configuration parameter definition	86
3.7 ES-2041D/ES-2042D (4-channel digital 2A output module)	88
3.6.1 Module overview	88

3.6.2 Module parameters	88
3.6.3 Introduction to interfaces	89
3.6.4 LED indicators	90
3.6.5 The operating status of the backplane indication system is described in the table below.	90
3.6.6 Output status indication	90
3.6.7 Definition of terminal blocks	91
3.5.8 Wiring diagram	93
3.5.9 Process data definitions	93
3.5.10 Configuration parameter definitions	94
3.8 ES-3043A (4-channel Analog Input Module)	95
3.8.1 Module Overview	95
3.8.2 Module parameters	95
3.8.3 Interface Introduction	96
3.8.4 LED indicators	97
3.6.5 The operating status of the backplane indication system is described in the table below.	97
3.8.6 Terminal connection definition	98
3.8.7 Wiring diagram	99
3.8.8 4~20mA Definition and Line Chart	100
3.8.9 Process data definition	101
3.8.10 Configuration parameter definition	102
3.9 ES-3081A/ES-3082A (8-channel analog input module)	104
3.7.1 Module overview	104
3.9.2 Module parameters	104
3.9.3 Introduction to interfaces	105
3.9.4 LED indicators	106
3.9.5 The operating status of the backplane indication system is described in the table below.	106
3.9.6 Definition of terminal blocks	107
3.9.7 Wiring diagram	108
3.9.8 4~20mA Definition and Line Chart	109
3.9.9 Process data definitions	110
3.9.10 Configuration parameter definitions	111
3.10 ES-3047A (4-channel PT100 temperature input module)	113
3.10.1 Module overview	113
3.10.2 Module parameters	113
3.10.3 Introduction to interfaces	114
3.10.4 LED indicators	115
3.10.5 The operating status of the backplane indication system is described in the table below.	115
3.10.6 Definition of terminal blocks	116
3.10.7 Wiring diagram	117
3.10.8 Process data definitions	118
3.10.9 Configuration parameter definitions	119
3.11 ES-3087A (8-channel RTD input module)	121
3.11.1 Module overview	121

3.11.2 Module parameters	121
3.11.3 Introduction to interfaces	122
3.11.4 LED indicators	123
3.11.5 The operating status of the backplane indication system is described in the table below.	123
3.11.6 Definition of terminal blocks	124
3.11.7 Wiring diagram	125
3.11.8 Process data definitions	126
3.11.9 Configuration parameter definitions	127
3.12 ES-3048A (4-channel thermocouple input module)	129
3.12.1 Module Overview	129
3.12.2 Module Parameters	129
3.12.3 Interface Introduction	130
3.12.4 LED indicator light	131
3.12.5 The operating status of the backplane indication system is described in the table below.	131
3.12.6 Terminal connection definition	132
3.12.7 Wiring diagram	133
3.12.8 Process data definition	134
3.12.9 Configuration parameter definition	135
3.13 ES-3088A (8-channel thermocouple input module))	137
3.13.1 Module overview	137
3.13.2 Module parameters	137
3.13.3 Introduction to interfaces	138
3.13.4 LED indicators	139
3.13.5 The operating status of the backplane indication system is described in the table below.	139
3.13.6 Definition of terminal blocks	140
3.13.7 Wiring diagram	141
3.13.8 Process data definitions	142
3.13.9 Configuration parameter definitions	143
3.14 ES-4043A (4-channel analog output module)	145
3.14.1 Module overview	145
3.14.2 Module parameters	145
3.14.3 Introduction to interfaces	146
3.14.4 LED indicators	147
3.14.5 The operating status of the backplane indication system is described in the table below.	147
3.14.6 Definition of terminal blocks	148
3.14.7 Wiring diagram	149
3.14.8 Process data definitions	150
3.14.9 Configuration parameter definitions	151
3.15 ES-4081A/ES-4082A (8-channel analog output module)	153
3.15.1 Module overview	153
3.15.2 Module parameters	153
3.15.3 Introduction to interfaces	154
3.15.4 LED indicators	155

3.15.5 The operating status of the backplane indication system is described in the table below.	155
3.15.6 Definition of terminal blocks	156
3.15.7 Wiring diagram	157
3.15.8 Process Data Definition	158
3.15.9 Configuration parameter definitions	159
3.16 ES-04PM/ES-04PMB (4-channel high-speed pulse output module)	161
3.16.1 Module overview	161
3.16.2 Module parameters	161
3.16.3 Introduction to interfaces	162
3.16.4 LED indicators	163
3.16.5 The operating status of the backplane indication system is described in the table below.	163
3.16.6 Definition of terminal blocks	164
3.16.7 Wiring diagram	165
3.16.8 Process data definitions	167
3.16.9 Configuration parameter definitions	169
3.17 ES-04DMA (4-channel pulse positioning module))	173
3.17.1 Module overview	173
3.17.2 Module parameters	173
3.17.3 Introduction to interfaces	174
3.17.4 LED indicators	175
3.17.5 The operating status of the backplane indication system is described in the table below.	175
3.17.6 Definition of terminal blocks	176
3.17.7 Wiring diagrams	178
3.17.8 Process data definitions	179
3.17.9 Configuration parameter definitions	181
3.18 ES-02HC (2-channel high-speed pulse input module))	187
3.18.1 Module overview	187
3.18.2 Module generalization parameters	187
3.18.3 Introduction to interfaces	188
3.18.4 LED indicators	189
3.18.5 The operating status of the backplane indication system is described in the table below.	189
3.18.6 Definition of terminal blocks	190
3.18.7 Wiring diagram	191
3.18.8 Process data definitions	192
3.18.9 Configuration parameter definitions	194
3.19 ES-02MB-485 (2-channel 485 module))	202
3.19.1 Module overview	202
3.19.2 Module generalization parameters	202
3.19.3 Introduction to interfaces	203
3.19.4 LED indicators	204
3.19.5 The operating status of the backplane indication system is described in the table below.	204
3.19.6 Definition of terminal blocks	205
3.19.7 Wiring diagram	206

3.19.8 Parameter definition with LAE-CONFIG	207
3.20 ES-02MB-232 (2-channel 232 module)	209
3.20.1 Module overview	209
3.20.2 Module generalization parameters	209
3.18.3 Introduction to interfaces	210
3.20.4 LED indicators	211
3.20.5 The operating status of the backplane indication system is described in the table below.	211
3.20.6 Definition of terminal blocks	212
3.20.7 Wiring diagram	213
3.20.8 Define the parameters using LAE-CONFIG	214
3.21 ES-04IOL (4-channel IOLINK master station module)	215
3.21.1 Module Overview	215
3.21.2 Module parameter values	215
3.21.3 Interface Introduction	216
3.18.4 LED indicators	217
3.18.5 The operating status of the backplane indication system is described in the table below.	217
3.21.6 Terminal connection definition	219
3.21.7 Wiring diagram	220
3.21.8 Define the parameters using LAE-CONFIG	221
3.22 ES-3026A/ES-3026B (2-channel weighing module)	222
3.22.1 Module Overview	222
3.22.2 Module parameter values	222
3.22.3 Interface Introduction	223
3.18.4 LED indicators	224
3.18.5 The operating status of the backplane indication system is described in the table below.	224
3.22.6 Terminal connection definition	225
3.22.7 Wiring diagram	226
3.22.8 Process Data Definition	227
3.22.9 Configuration Parameter Definition	229
4. Communication Configuration Example	230
4.1 Getting Started with the LUC-PNB and S7-1200 (TIA V14) Connection	231
4.1.1 New projects	231
4.1.2 Adding a Siemens PLC	231
4.1.3 GSD file import	232
4.1.4 Setting PLC parameters	233
4.1.5 Adding modules	233
4.1.6 Modifying device names within the module	234
4.1.7 Insertion of extension modules	234
4.1.8 Expansion Module Parameter Settings	235
4.1.9 Hardware configuration completed	235



1. Product Overview

Anaphora

This product is specialized equipment for use in industrial settings and should only be used by personnel with experience in electrical operation. Please read this manual carefully before use and follow the instructions to avoid injury to personnel or damage to the product.


This product is designed to meet IP20 protection level, and when used, it needs to be installed in a power distribution cabinet with dust and moisture-proof function.

Distributed remote IO system consists of network coupler module and expansion IO module, the network coupler module is responsible for the field bus communication, to realize the communication connection with the master controller or host computer software. The extended IO module is responsible for connecting with the input and output sensors in the field. The input IO module collects all kinds of signals in the field and sends them to the network coupler through the internal bus, the controller reads the data from the coupler through the field bus and processes the data, and then writes the output data to the network coupler, and then the network coupler writes the output data to the output IO module through the internal bus to realize the control of the equipment. The network coupler then writes the output data to the output IO module through the internal bus, thus realizing the control of the device. The network coupler can select the corresponding bus module according to the communication interface of the controller system, and the mainstream industrial communication protocols include PROFINET, EtherCAT, EtherNet/IP, CC-Link IE Field Basic and so on. Extended IO modules are divided into 6 categories, digital input modules, digital output modules, analog input modules, analog output modules, special modules, and hybrid IO modules. The network coupler and the expansion IO module can be freely combined according to the field requirements, and the distributed IO module can realize the lower cost requirement in the case of more points.


1.1 Product Characterization

1.1.1 LUC Series Coupler Module - Dimension Drawing


(120*17*99mm)

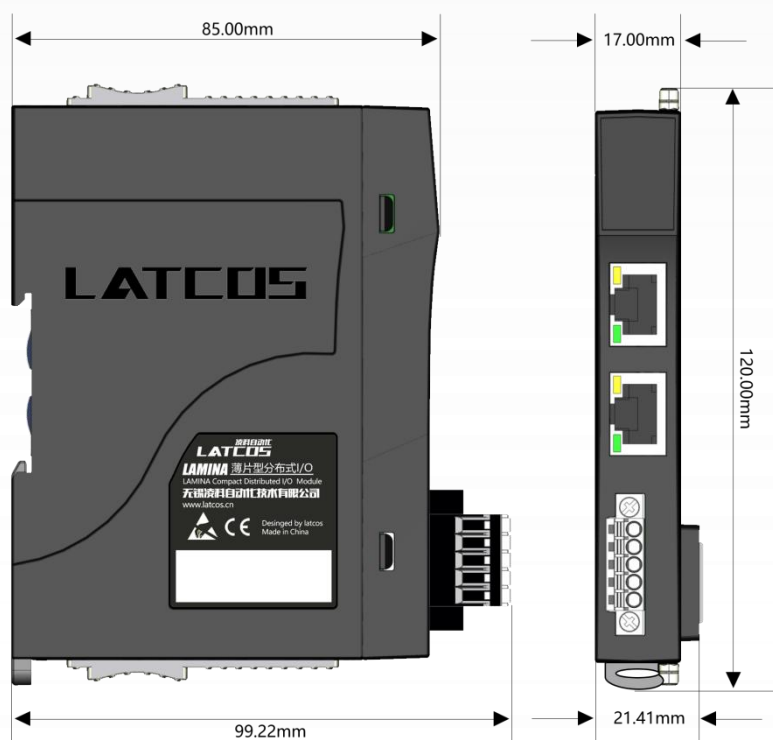


1.1.2 ES Series Expansion Modules - Dimensional Drawing (120 * 17 * 99.22mm)

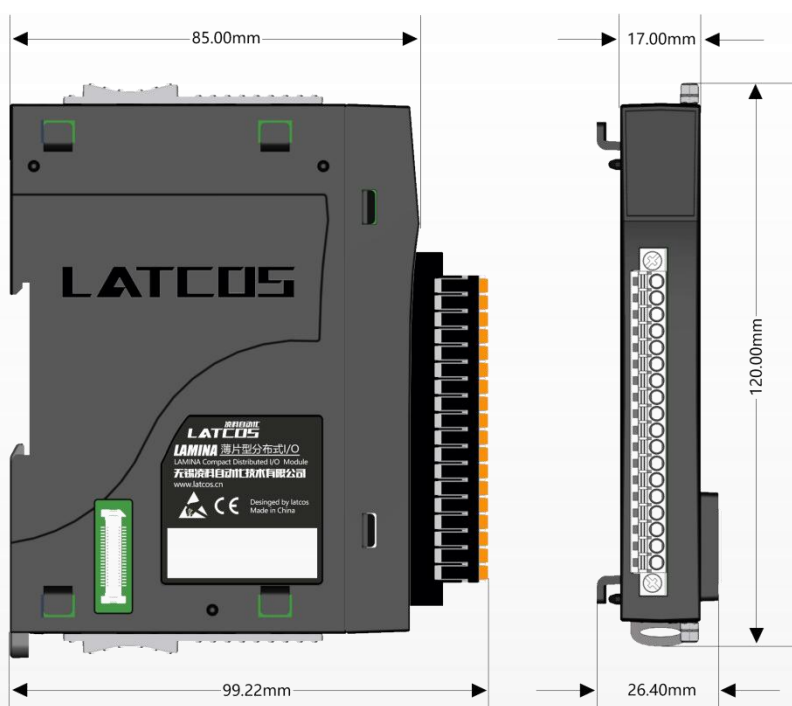

1.1.3 ES Series Expansion Modules - Dimensional Drawing

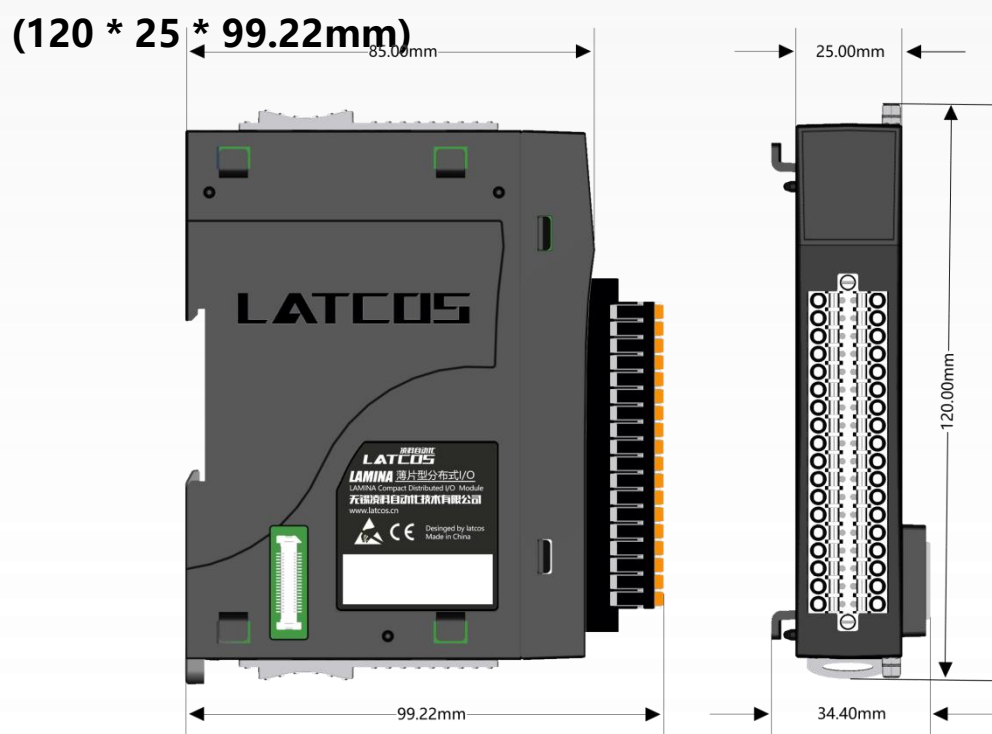

1.1.4 Mounting method (DIN35 rail mounting)

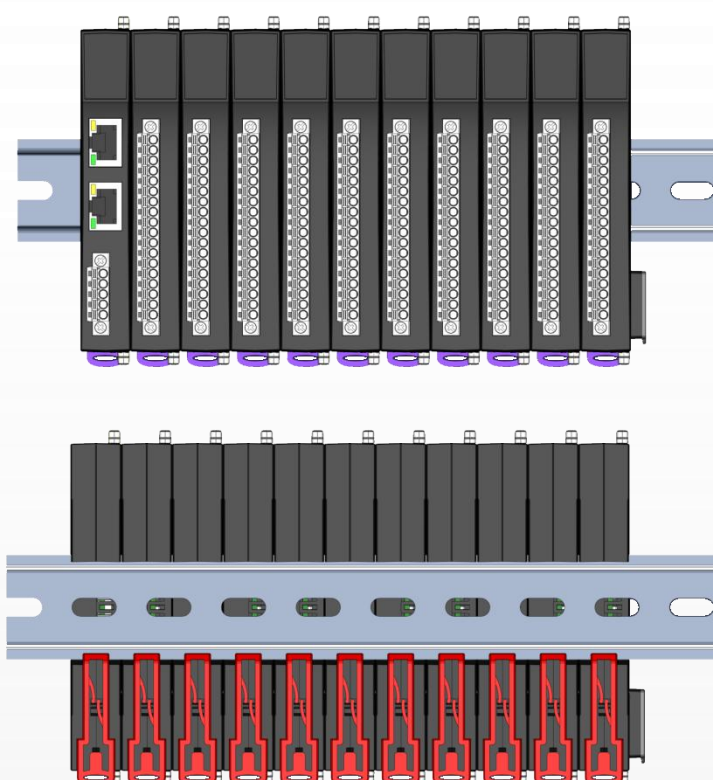



2. Network coupler module

2.1 LUC-PNB


2.1.1 Module overview

LUC-PNB PROFINET network coupler, support standard PROFINET IO Device device communication. Support RT communication mode, RT real-time communication minimum cycle is 1ms, the coupler supports maximum input 1440 bytes, maximum output 1440 bytes, the number of supported expansion IO modules is 32.

Coupler Hardware Parameters		
model number		LUC-PNB
bus interface		2*RJ45
Extended Interface		2*20Pin Board-to-Board Connector
Power connector		Plug-in terminal block 5Pin (with screw fixing)
operating voltage		24V DC (-15%~20%)
Operating Current		100mA
communication protocols		PROFINET RT
Communication rate (Max)		100Mb/s
addressing mode		Set by Master Software
Number of extensions supported (Max)		32
I/O Capacity (Max)	Input(bit)	1440
	Output(bit)	1440
Backplane Output	input voltage	24V DC
	amps	2A
Interface/Communication Cable		2*RJ45/ Category 5 twisted-pair cable
Installation		DN35 rail mounting
Environmental parameters		
operating temperature		-40~85°C
Environmental humidity		5%-95% non-condensing
protection class		IP20

Table 1 Coupler hardware parameters

2.1.2 Introduction to interfaces

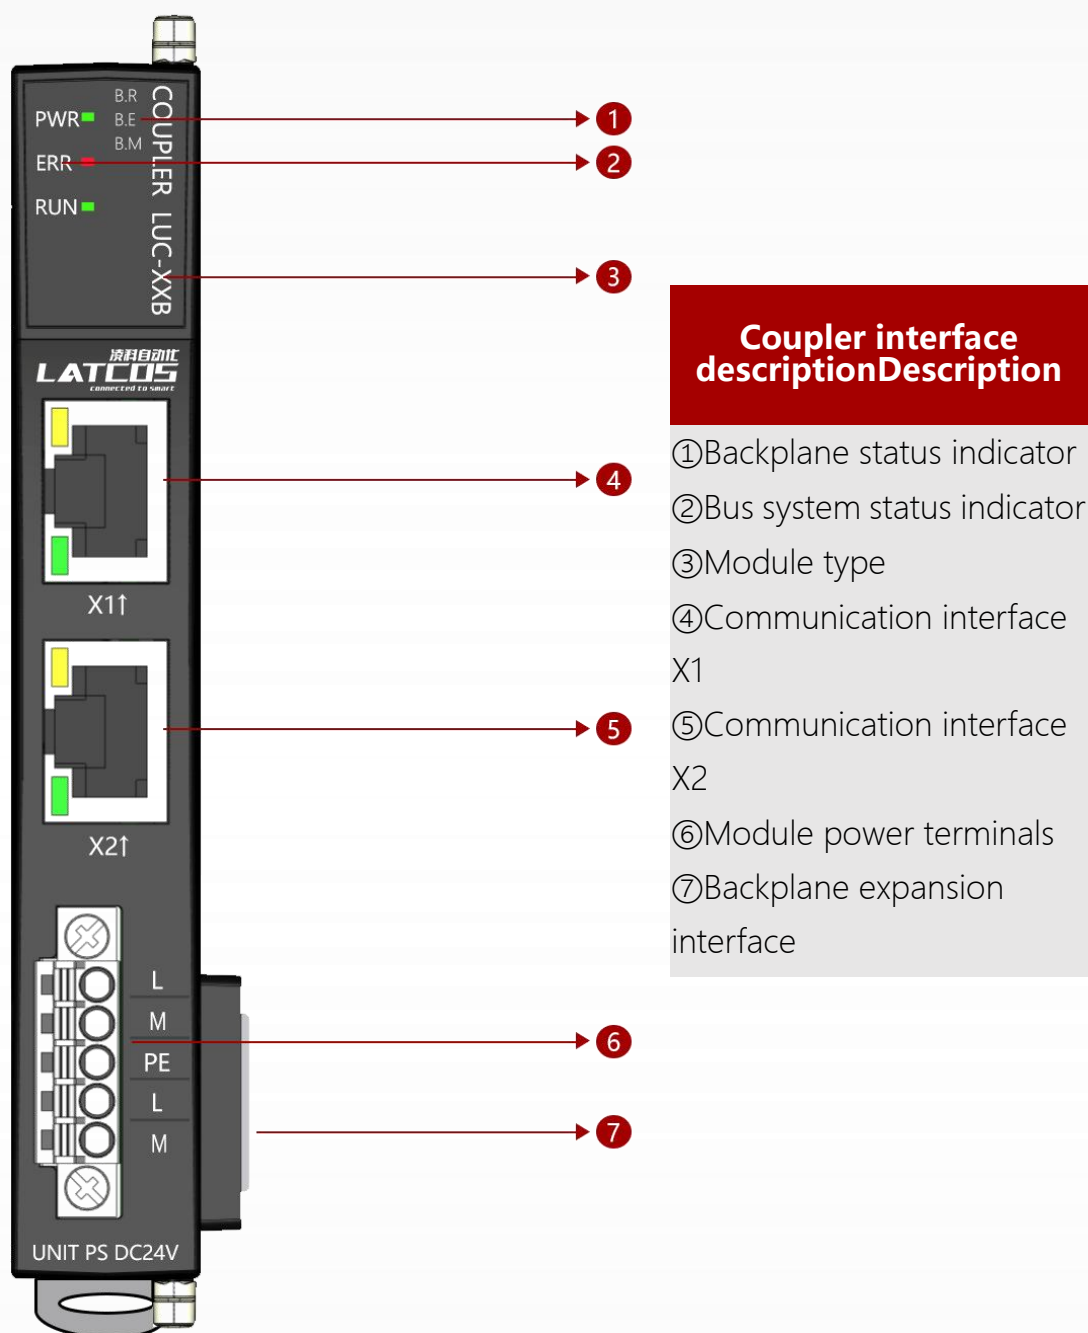

Note: X1 and X2 are PROFINET communication ports, support switch function, 10M/100M adaptive rate.

2.1.3 LED indicators

The LED indicators of the module are divided into three parts: bus system status indicator, backplane indicator, and RJ45 link indicator.

2.1.4 System Status Indication The operating status of the system is described in Table

PWR (power supply)	ERR (fault)	RUN	clarification
			Abnormal power supply or no power supply
			communication interface failure
			The module successfully enters into operation and successfully establishes cyclic data interaction with the master.

Table 2 System Status Indication

 The green light is on  Indicates that the red light is on  Not bright

2.1.5 The operating status of the backplane indication system is described in the table below.

B.R	B.E	B.M	clarification
			Backplane activation in progress
			Backplane operating normally
			Coupler module backplane error

Table 3 System Status Indications

 The green light is on  Flashing green  Not bright

2.1.6 RJ45 indicator

Under normal circumstances, the RJ45 port indicator should be a long green light, yellow light flashing, if not, it means that the fault occurred. Green light does not light, indicating that the RJ45 port has a connection to the Hub or switch connection is faulty; yellow light does not light, it may be a failure of the module itself as Table 4: RJ45 indicator description


LINK1/LINK2	ACT1/ACT2	clarification
○	irrelevant	RJ45 port without network cable connection or poor connection
●	irrelevant	RJ45 ports are correctly identified to the Ethernet network
irrelevant	○	No data interaction on RJ45 port
irrelevant	●	RJ45 port has data interaction

Table 4 RJ45 Indicator Description


2.1.7 PROFINET coupler communication interface definition

The module uses a physical interface for communication with dual RJ45 sockets, and the module itself has switch functionality. They are identified as X1P1 and X1P2.

Table 5 PROFINET communication interfaces

	pinout	code	descriptive
	1	TX+	Data transmission +
	2	TX-	Data transmission -
	3	RX+	Data reception+
	4	NC	unused
	5	NC	unused
	6	RX-	Data reception -
	7	NC	unused
	8	NC	unused
Connector Housings	PE		grounding

2.1.8 Electrical wiring diagram for PROFINET coupler

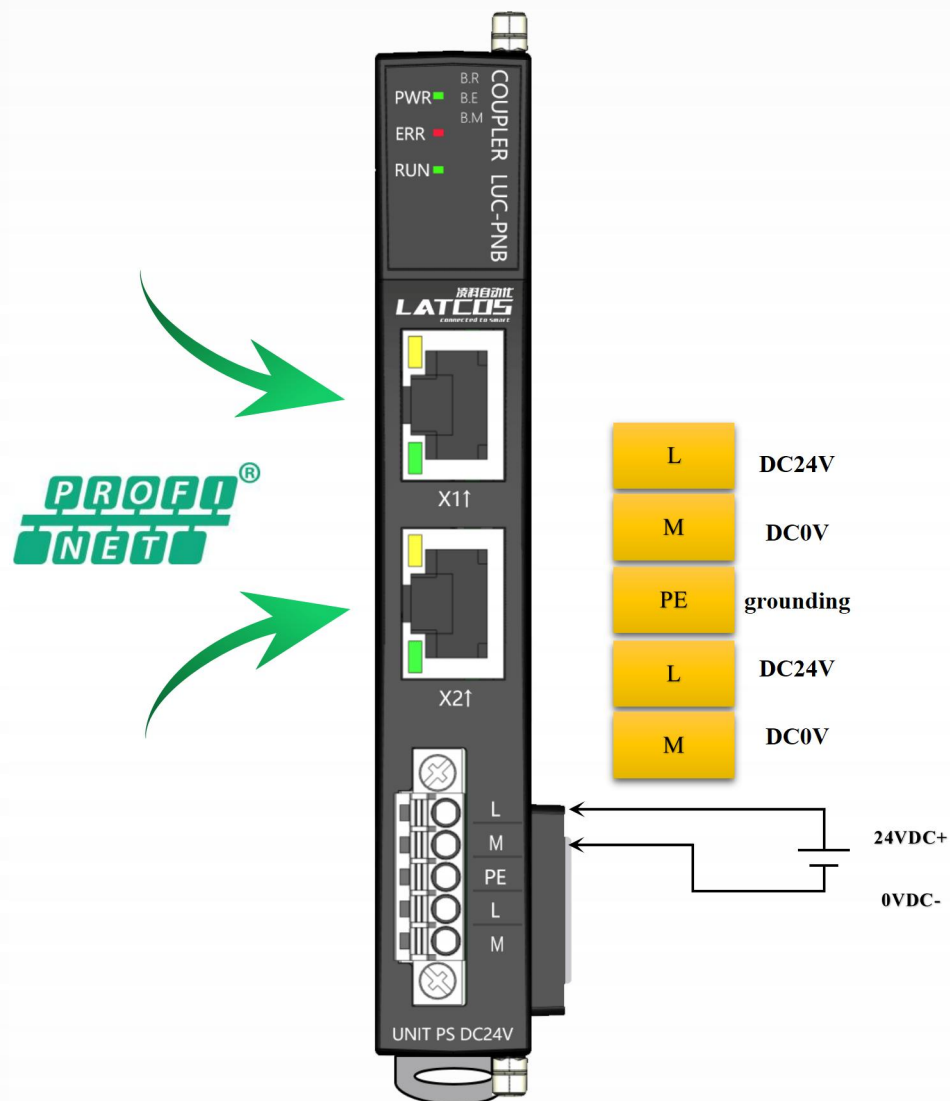

2.1.9 Network topology

The following figure shows a typical network layout for PROFINET IO. As shown in Figures 1-1, 1-2, 1-3

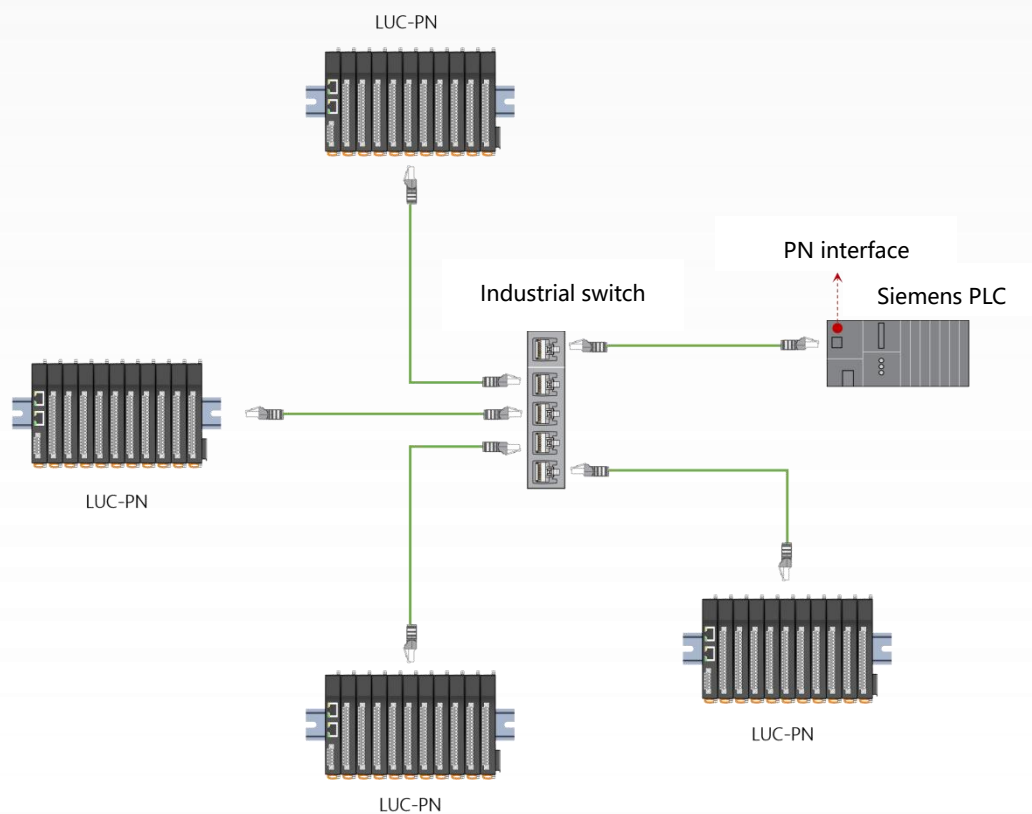


Figure 1-1 PROFINET Star Network Topology

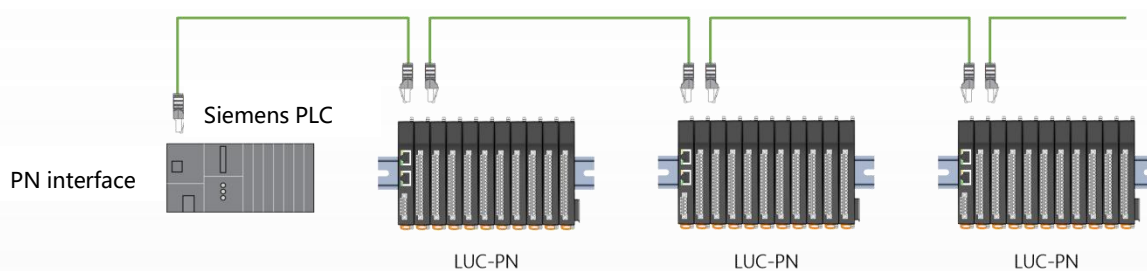


Figure 1-2 PROFINET daisy chain topology

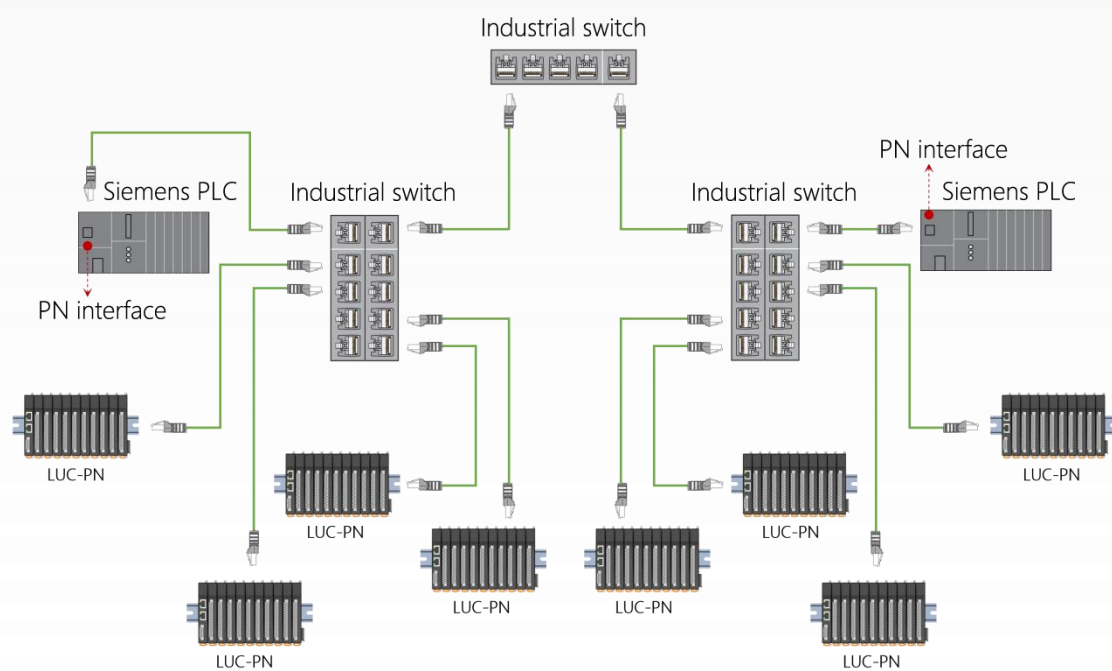


Figure 1-3 PROFINET Tree Network Topology

2.2 LUC-EPB


2.2.1 Module overview

The LUC-EPB ETHERNET/IP Network Coupler supports standard ETHERNET/IP I/O Device device communication. The number of supported expansion IO modules is 32.

Coupler hardware parameters		
model number		LUC-EPB
bus interface		2*RJ45
Extended Interface		2*20Pin Board-to-Board Connector
Power connector		Plug-in terminal block 5Pin (with screw fixing)
operating voltage		24V DC (-15%~20%)
Operating Current		100mA
communication protocols		ETHERNET/IP
Communication rate (Max)		100Mb/s
addressing mode		Set by LAEConfig
Number of extensions supported (Max)		32
I/O Capacity (Max)	Input(bit)	512
	Output(bit)	512
Backplane Output	input voltage	24V DC
	amps	2A
Interface/Communication Cable		2*RJ45/ Category 5 twisted-pair cable
Installation		DN35 rail mounting
Environmental parameters		
operating temperature		-40~85°C
Environmental humidity		5%-95% non-condensing
protection class		IP20

Table 6 Coupler Hardware Parameters

2.2.2 Introduction to interfaces

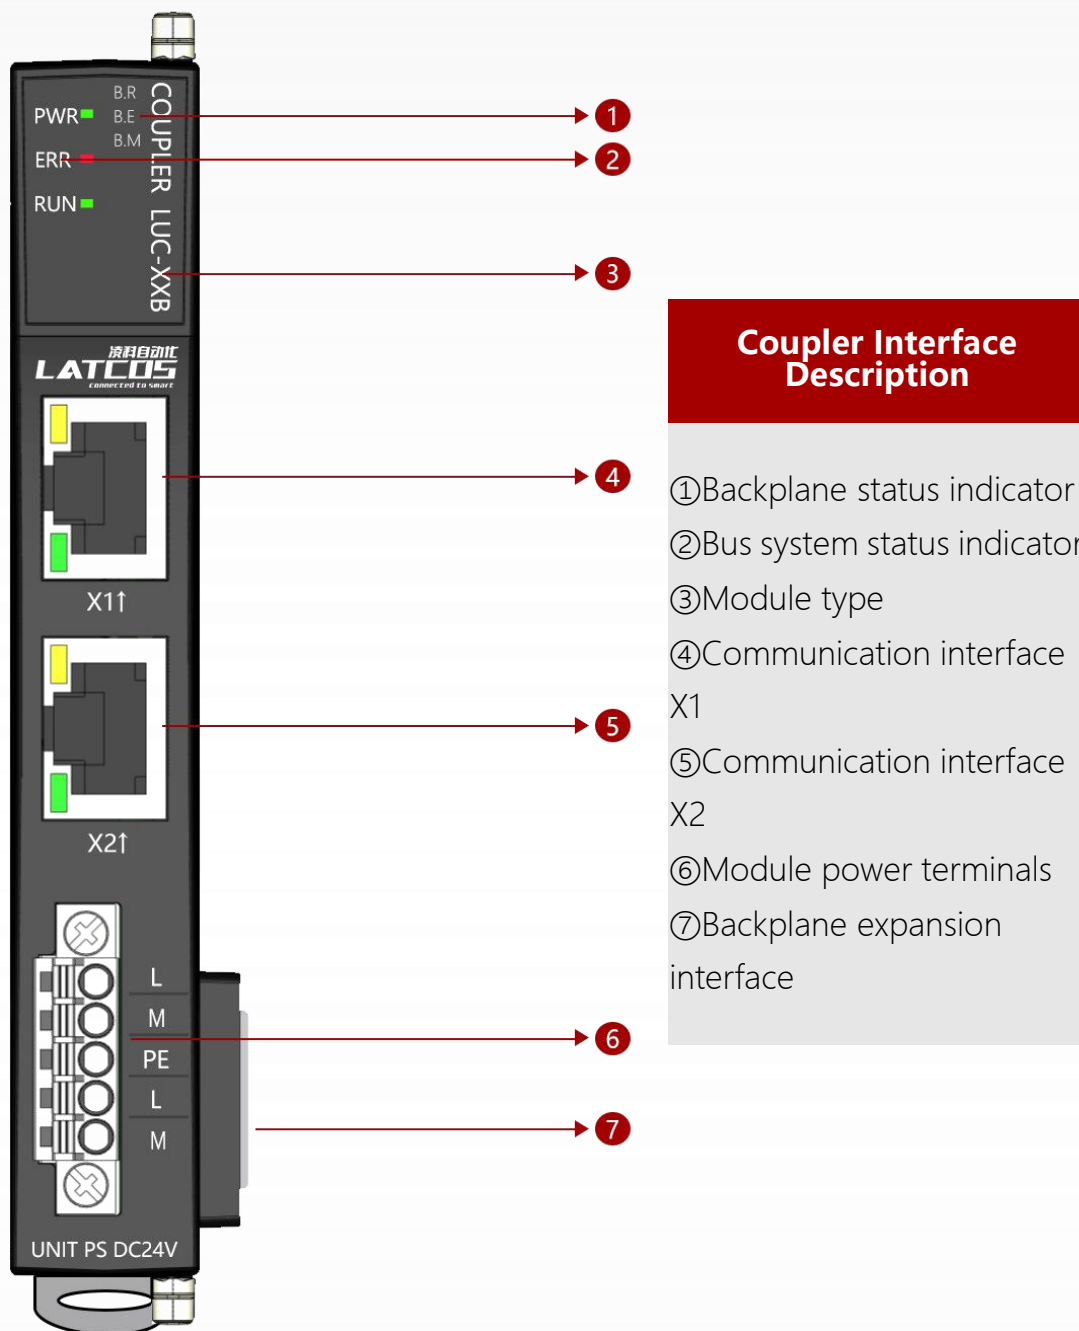

Note: X1 and X2 are ETHERNET/IP communication ports, support switch function, 10M/100M adaptive rate.

2.2.3 LED indicators

The LED indicators of the module are divided into three parts: bus system status indicator, backplane indicator, and RJ45 link indicator.

2.2.4 System Status Indication The operating status of the system is described in Table

PWR (power supply)	ERR (fault)	RUN	clarification
○	○	○	Abnormal power supply or no power supply
●	●	○	communication interface failure
●	○	●	The module successfully enters into operation and successfully establishes cyclic data interaction with the master.

Table 7 System Status Indication

● The green light is on ● Indicates that the red light is on ○ Not bright

2.2.5 The operating status of the backplane indication system is described in the table below.

B.R	B.E	B.M	clarification
◐	○	○	Backplane activation in progress
●	○	○	Backplane operating normally
●	●	○	Coupler module backplane error

Table 8 System Status Indication

● The green light is on ◐ Flashing green ○ Not bright

2.2.6 RJ45 indicator light

Under normal circumstances, the RJ45 port indicator should be a long green light, yellow light blinking, if not, it means that the fault occurred. If the green light is not on, it indicates that the RJ45 port has a faulty connection to the Hub or switch; if the yellow light is not on, it may be a fault in the module itself as shown in Table (4).

LINK1/LINK2	ACT1/ACT2	clarification
○	irrelevant	RJ45 port without network cable connection or poor connection
●	irrelevant	RJ45 ports are correctly identified to the Ethernet network
irrelevant	○	No data interaction on RJ45 port
irrelevant	●	RJ45 port has data interaction


Table 9 RJ45 Indicator Description

2.2.7 ETHERNET/IP Coupler Communication Interface

Definition


The module uses dual RJ45 sockets to communicate with the physical interface, the module itself has a switch function. The modules are labeled X1P1 and X1P2.

Table 10 ETHERNET/IP Communication Interfaces



pinout	code	descriptive
1	TX+	Data transmission +
2	TX-	Data transmission -
3	RX+	Data reception+
4	NC	unused
5	NC	unused
6	RX-	Data reception -
7	NC	unused
8	NC	unused
Connector Housings	PE	grounding

2.2.8 ETHERNET/IP Coupler Electrical Wiring Diagrams

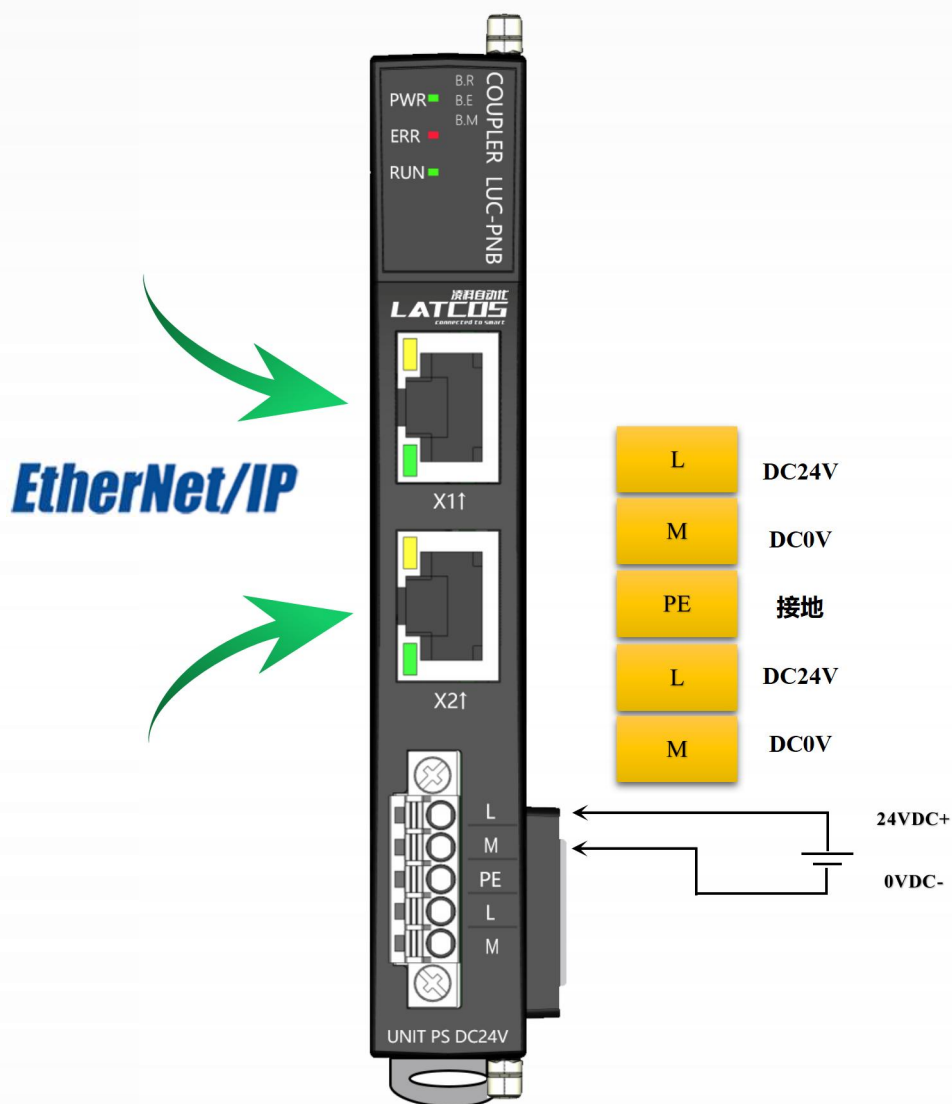

2.2.9 Network topology

The following figure shows a typical network layout for ETHERNET/IP IO. As shown in Figures 2-1, 2-2, 2-3

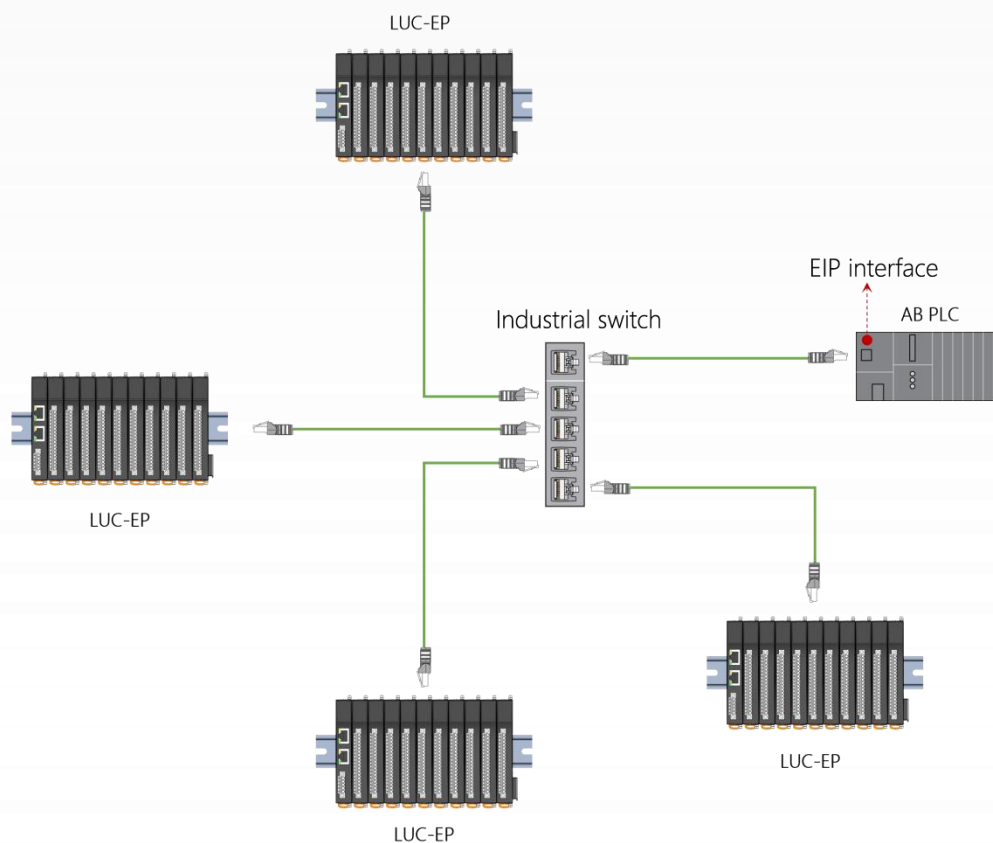


Figure 2-1 ETHERNET/IP Star Network Topology

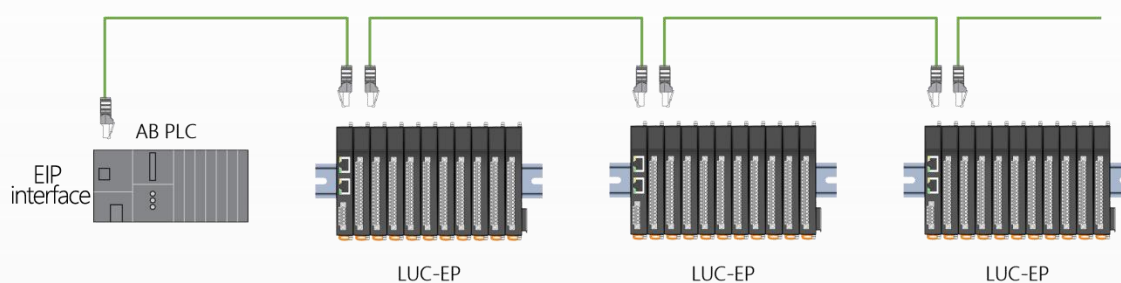


Figure 2-2 ETHERNET/IP daisy chain topology

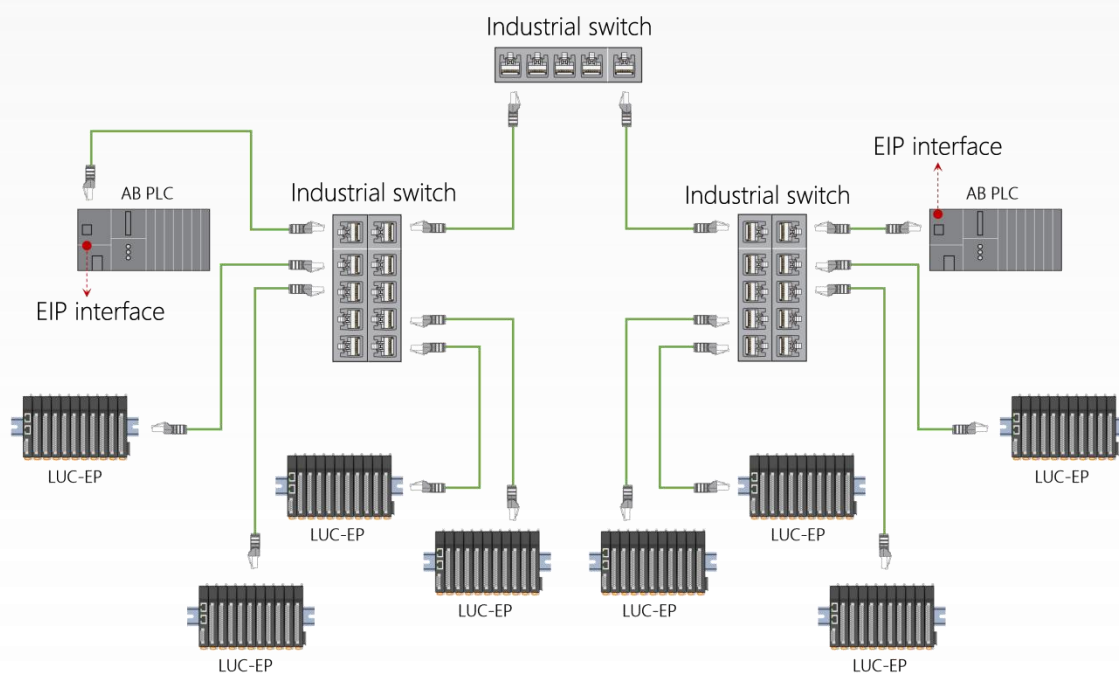


Figure 2-3 ETHERNET/IP Tree Network Topology

2.3 LUC-CEB


2.3.1 Module overview

The LUC-CEB CC-Link IE Field Basic Network Coupler supports standard CC-Link IE Field Basic IO Device device communication. The number of supported expansion IO modules is 32.

Coupler Hardware Parameters		
model number		LUC-CEB
bus interface		2*RJ45
Extended Interface		2*20Pin Board-to-Board Connector
Power connector		Plug-in terminal block 5Pin (with screw fixing)
operating voltage		24V DC (-15%~20%)
Operating Current		150mA
communication protocols		CC-Link IE Field Basic
Communication rate (Max)		100Mb/s
addressing mode		Set by LAEConfig
Number of extensions supported (Max)		32
I/O Capacity (Max)	Input(bit)	512
	Output(bit)	512
Backplane Output	input voltage	24V DC
	amps	2A
Interface/Communication Cable		2*RJ45/ Category 5 twisted-pair cable
Installation		DN35 rail mounting
Environmental parameters		
operating temperature		-40~85°C
Environmental humidity		5%-95% non-condensing
protection class		IP20

Table 11 Coupler hardware parameters

2.3.2 Introduction to interfaces

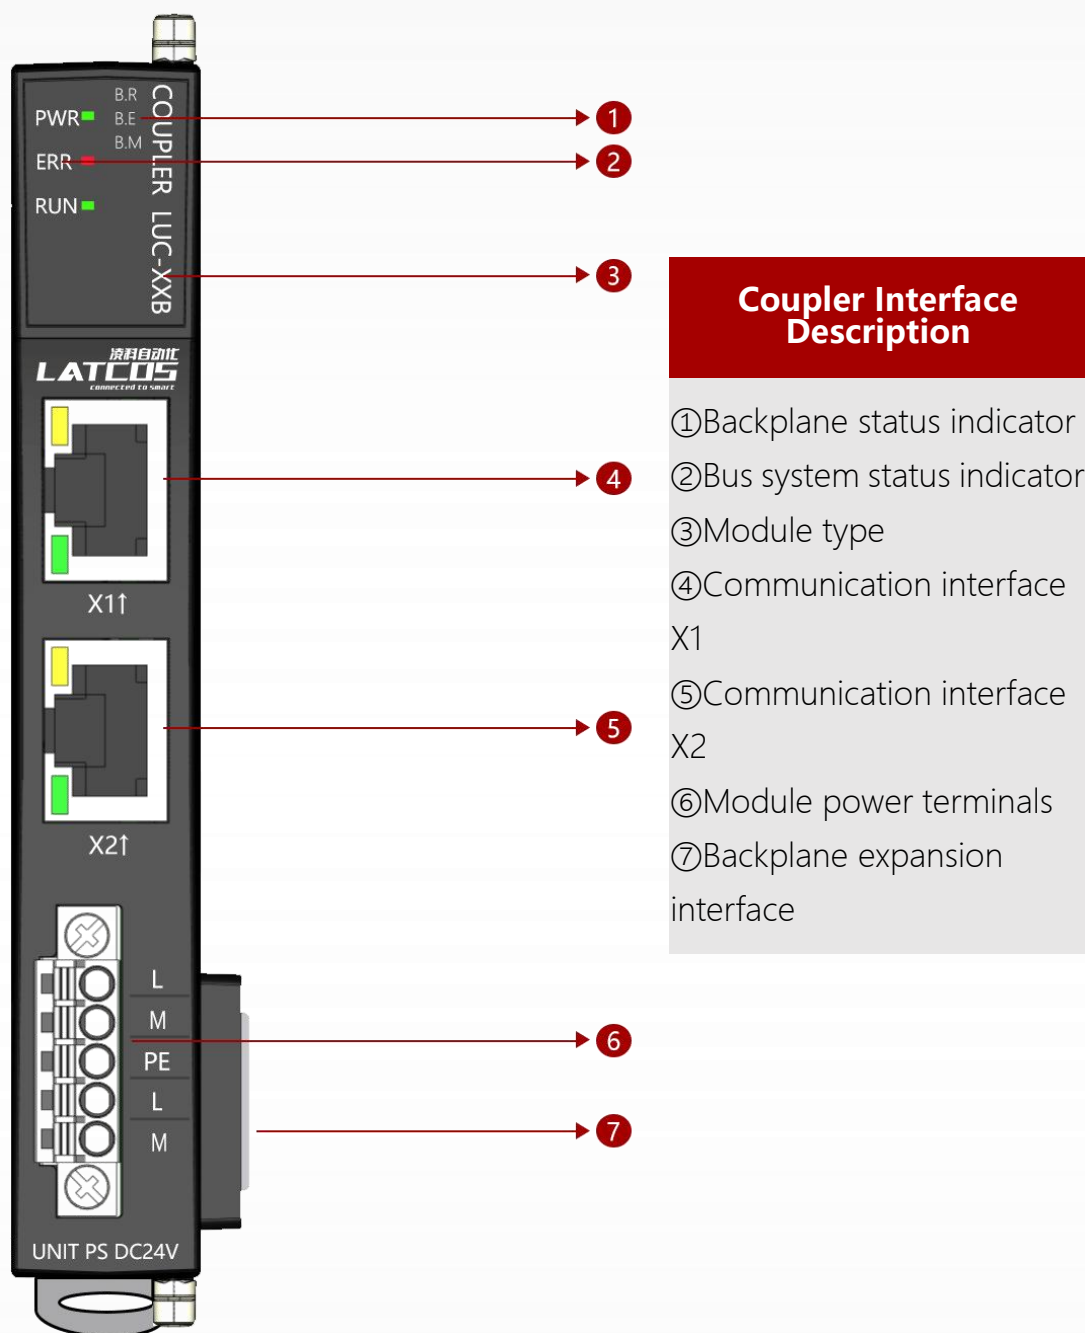

Note: X1 and X2 are CC-Link IE Field Basic communication ports, support switch function, 10M/100M adaptive rate.

2.3.3 LED indicators

The LED indicators of the module are divided into 3 parts: bus system status indicator, backplane indicator, and RJ45 link indicator.

2.3.4 System Status Indication The operating status of the system is described in Table

PWR (power supply)	ERR (fault)	RUN	clarification
			Abnormal power supply or no power supply
			communication interface failure
			The module successfully enters into operation and successfully establishes cyclic data interaction with the master.

Table 12 System Status Indication

 The green light is on  Indicates that the red light is on  Not bright

2.3.5 The operating status of the backplane indication system is described in the table

B.R	B.E	B.M	clarification
			Backplane activation in progress
			Backplane operating normally
			Coupler module backplane error

Table 13 System Status Indication

 The green light is on  Flashing green  Not bright

2.3.6 RJ45 indicator light

Under normal circumstances, the RJ45 port indicator should be a long green light, yellow light flashing, if not, it means that the fault occurred. Green light does not light, indicating that the RJ45 port has a connection to the Hub or switch connection is faulty; yellow light does not light, it may be a failure of the module itself as Table 14: RJ45 indicator description

LINK1/LINK2	ACT1/ACT2	clarification
○	irrelevant	RJ45 port without network cable connection or poor connection
●	irrelevant	RJ45 ports are correctly identified to the Ethernet network
irrelevant	○	No data interaction on RJ45 port
irrelevant	●	RJ45 port has data interaction


Table 14 RJ45 Indicator Description

2.3.7 CC-Link IE Field Basic Coupler Communication Interface Definition

The module uses dual RJ45 sockets to communicate with the physical interface, the module itself has a switch function. They are labeled X1P1 and X1P2.


Table 15 CC-Link IE Field Basic communication

interfaces



pinout	code	descriptive
1	TX+	Data transmission +
2	TX-	Data transmission -
3	RX+	Data reception+
4	NC	unused
5	NC	unused
6	RX-	Data reception -
7	NC	unused
8	NC	unused
Connector Housings	PE	grounding

2.3.8 Electrical Wiring Diagram for CC-Link IE Field Basic Coupler

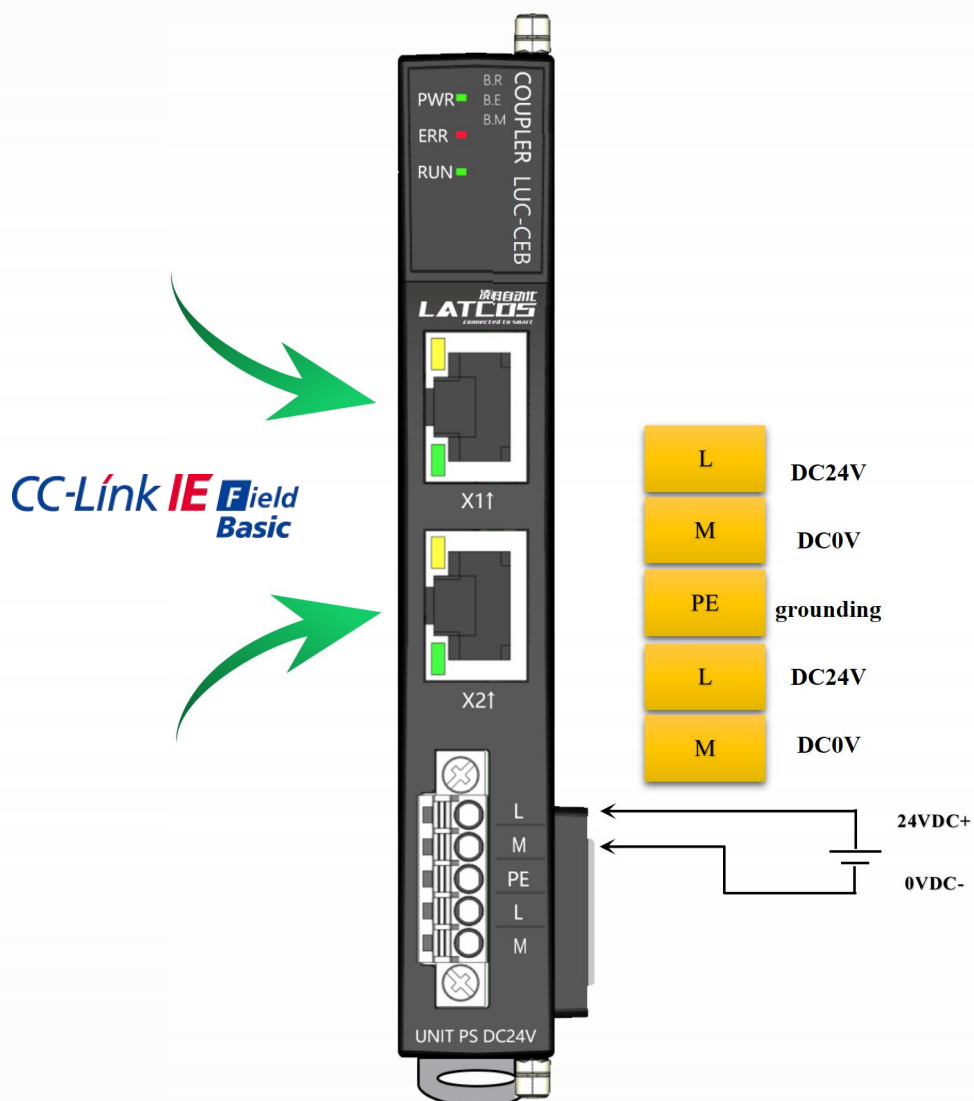

2.3.9 Network topology

The following figure shows a typical network layout for CC-Link IE Field Basic IO. As shown in Figure 3-1, 3-2

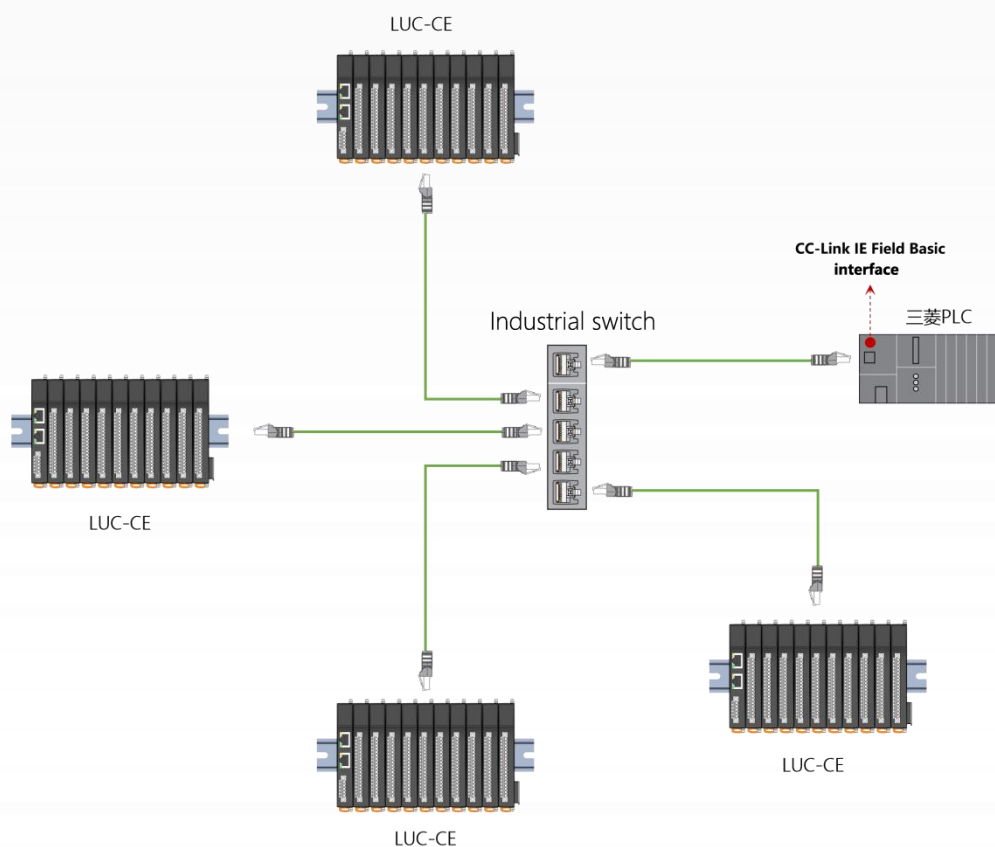


Figure 3-1 CC-Link IE Field Basic Star Network Topology

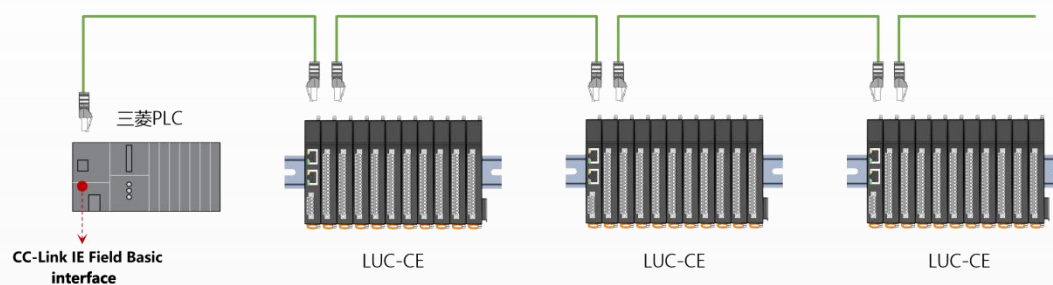


Figure 3-3 CC-Link IE Field Basic daisy chain topology

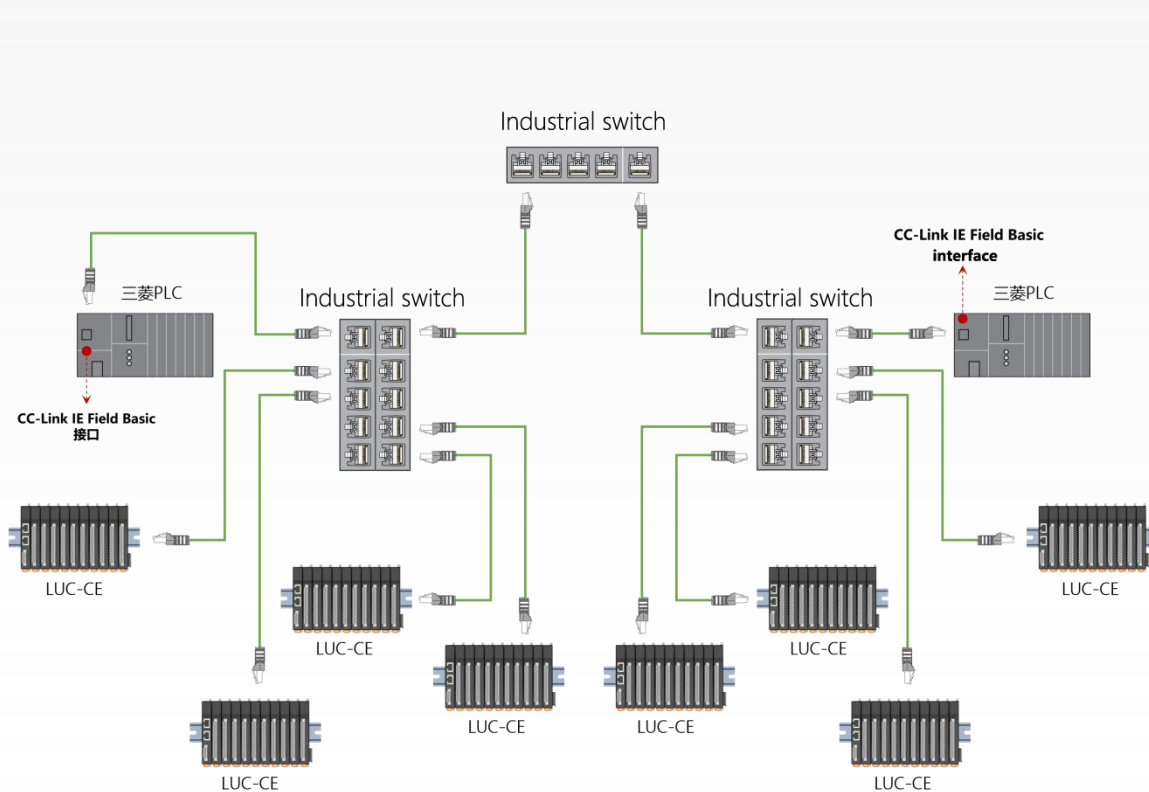


Figure 3-2 CC-Link IE Field Basic Tree Network Topology

2.4 LUC-EAB


2.4.1 Module overview

The LUC-EAB network coupler supports the high-performance ETHERCAT bus communication protocol and can directly provide high-performance input and output functions by expanding the digital or analog module I/O interface. Expandable versions of the module can also be optionally equipped with different expansion modules to increase the number of IO points required.

Coupler Hardware Parameters		
model number		LUC-EAB
bus interface		2*RJ45
Extended Interface		2*20Pin Board-to-Board Connector
Power connector		Plug-in terminal block 5Pin (with screw fixing)
operating voltage		24V DC (-15%~20%)
Operating Current		100mA
communication protocols		ETHERCAT
Communication rate (Max)		10/100 Mbaud, automatic transmission speed recognition
addressing mode		Set by master software
Number of extensions supported (Max)		32
I/O Capacity (Max)	Input(bit)	1440
	Output(bit)	1440
Backplane Output	input voltage	24V DC
	amps	2A
Interface/Communication Cable		2*RJ45/ Category 5 twisted-pair cable
Installation		DN35 rail mounting
Environmental parameters		
operating temperature		-40~85℃
Environmental humidity		5%-95% non-condensing
protection class		IP20

Table 16 Coupler Hardware Parameters

2.4.2 Introduction to interfaces

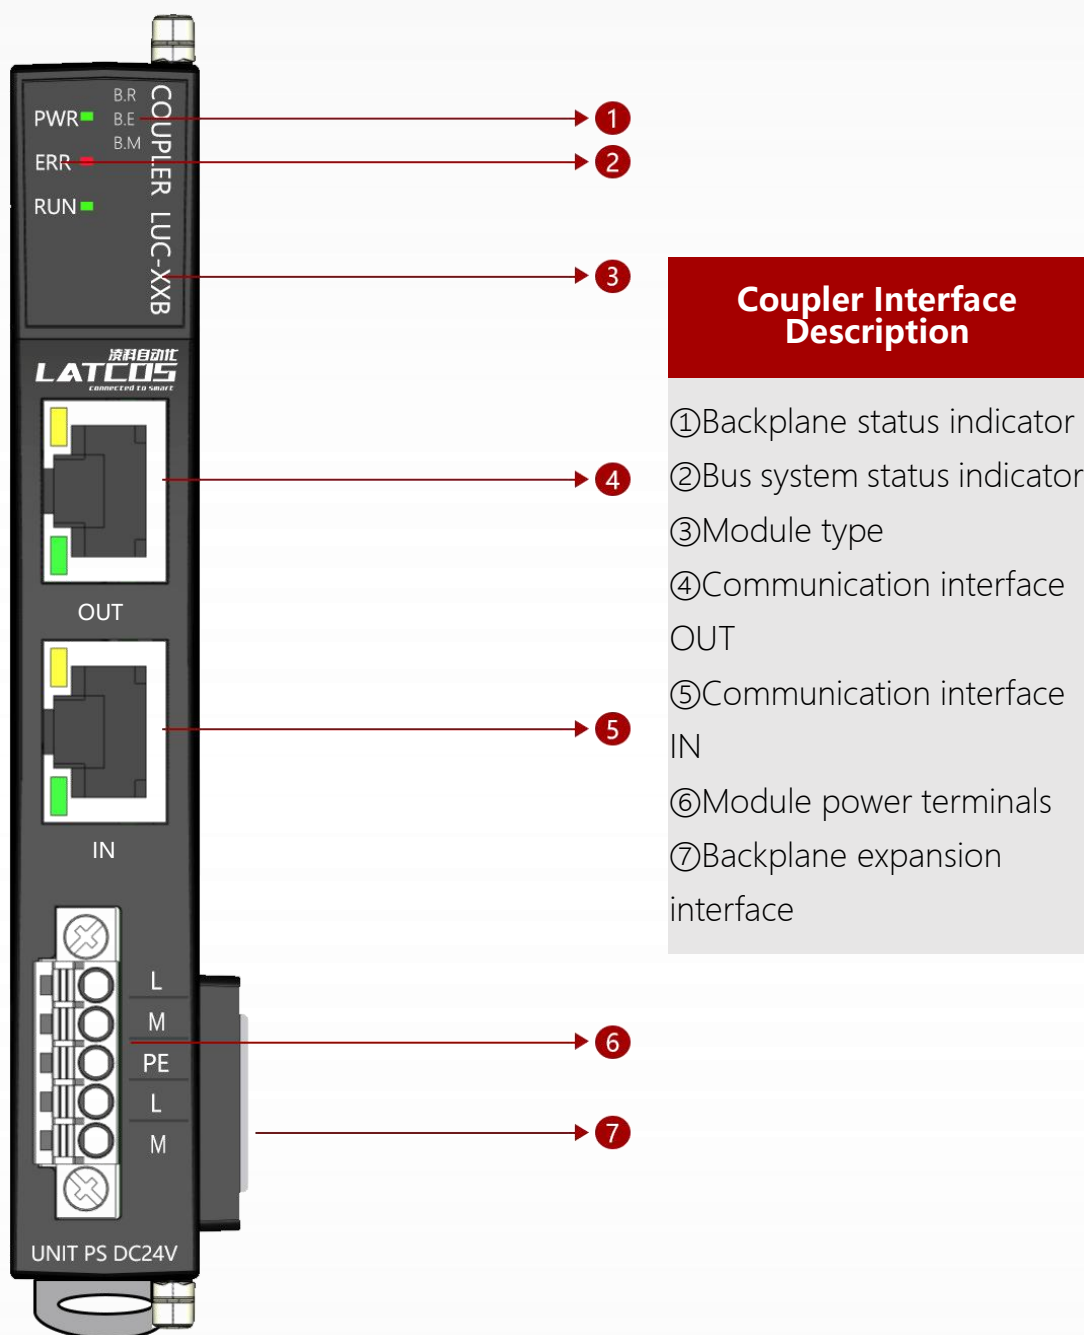

Note: OUT and IN are ETHERCAT communication ports, 10M/100M adaptive rate.

2.4.3 LED indicators

The LED indicators of the module are divided into 3 parts: bus system status indicator, backplane indicator, and RJ45 link indicator.

2.4.4 System Status Indication The operating status of the system is described in Table

PWR (power supply)	ERR (fault)	RUN	clarification
			Abnormal power supply or no power supply
			communication interface failure
			The module successfully enters into operation and successfully establishes cyclic data interaction with the master.

Table 17 System Status Indication

 The green light is on  Indicates that the red light is on  Not bright

2.4.5 The operating status of the backplane indication system is described in the table below.

B.R	B.E	B.M	clarification
			Backplane activation in progress
			Backplane operating normally
			Coupler module backplane error

Table 18 System Status Indication

 The green light is on  Flashing green  Not bright

2.4.6 RJ45 indicator light

Under normal circumstances, the RJ45 port indicator should be a long green light, yellow light flashing, if not, it means that the fault occurred. Green light does not light, indicating that the RJ45 port has a connection to the Hub or switch connection is faulty; yellow light does not light, it may be the module itself is faulty as Table 19: RJ45 indicator description

LINK1/LINK2	ACT1/ACT2	clarification
○	irrelevant	RJ45 port without network cable connection or poor connection
●	irrelevant	RJ45 ports are correctly identified to the Ethernet network
irrelevant	○	No data interaction on RJ45 port
irrelevant	●	RJ45 port has data interaction


Table 19 RJ45 Indicator Description

2.4.7 ETHERCAT Coupler Communication Interface

Definition


The module uses dual RJ45 sockets to communicate with the physical interface. They are identified as IN and OUT.

Table 20 ETHERCAT Communication Interface



pinout	code	descriptive
1	TX+	Data transmission +
2	TX-	Data transmission -
3	RX+	Data reception+
4	NC	unused
5	NC	unused
6	RX-	Data reception -
7	NC	unused
8	NC	unused
Connector Housings	PE	grounding

2.4.8 Electrical wiring diagram for ETHERCAT coupler

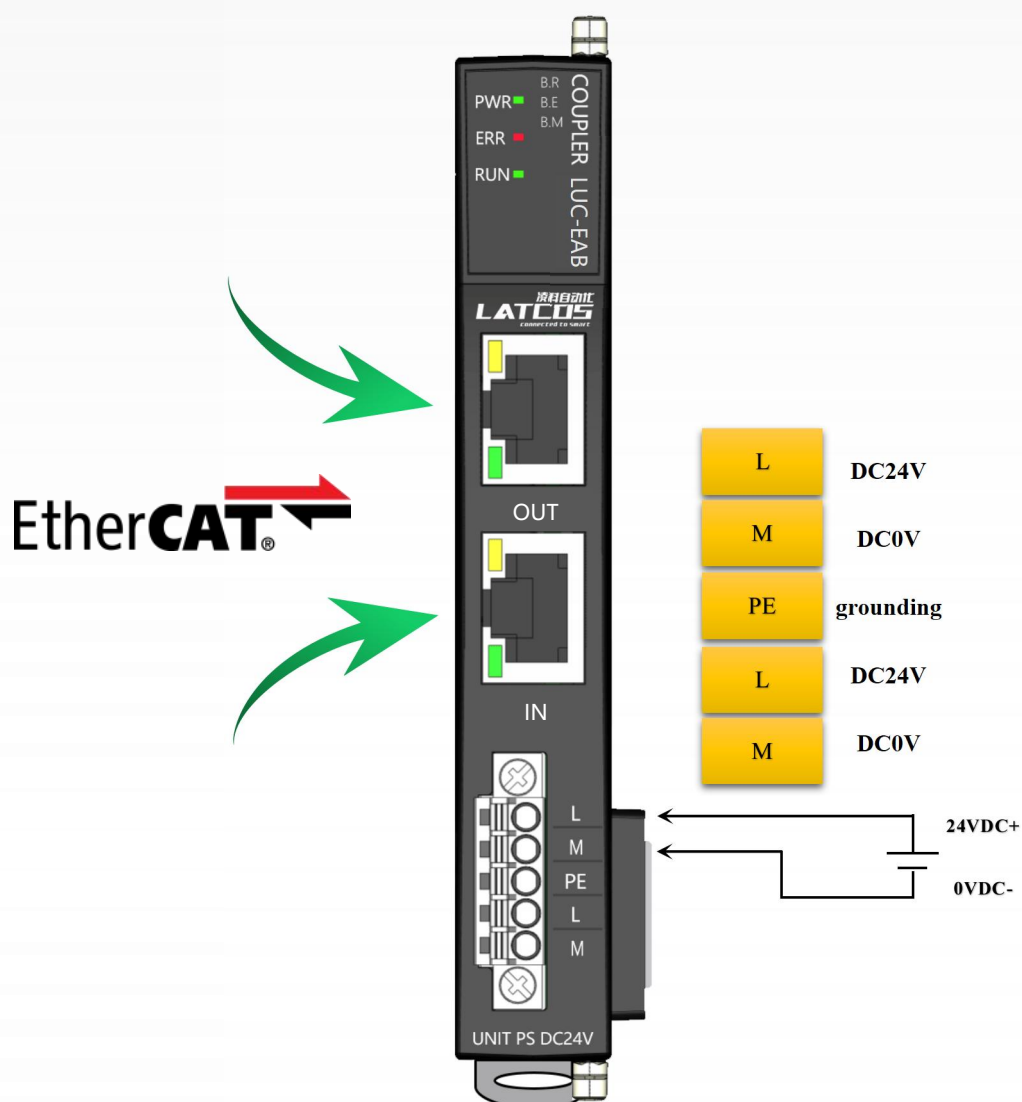

2.4.9 Network topology

The following figure shows a typical network layout for ETHERCAT IO. As shown in Figure 4

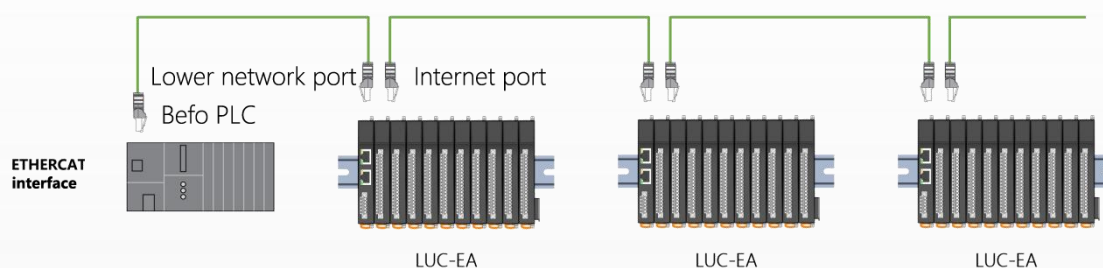


Fig. 4 ETHERCAT daisy chain topology

2.5 LUC-MTB

2.5.1 Module overview


LUC-MTB network adapter supports standard Modbus-TCP server communication, Ethernet support dual port switch cascade function. The device supports simultaneous access of 5 clients, function code 01/02/03/04/05/06/15/16/23, and Modbus application watchdog.

High-performance input and output functions can be provided directly by expanding the I/O interfaces of digital or analog modules. Expandable versions of the modules can also be optionally equipped with different expansion modules to increase the number of IO points required.

Coupler Hardware Parameters		
model number		LUC-MTB
bus interface		2*RJ45
Extended Interface		2*20Pin Board-to-Board Connector
Power connector		Plug-in terminal block 5Pin (with screw fixing)
operating voltage		24V DC (-15%~20%)
Operating Current		100mA
communication protocols		Modbus-TCP
Communication rate (Max)		10/100 Mbaud, automatic transmission speed recognition
addressing mode		Set by master software
Number of extensions supported (Max)		32
I/O Capacity (Max)	Input(bit)	1440
	Output(bit)	1440
Backplane Output	input voltage	24V DC
	amps	2A
Interface/Communication Cable		2*RJ45/ Category 5 twisted-pair cable
Installation		DN35 rail mounting
Environmental parameters		
operating temperature		-40~85℃
Environmental humidity		5%-95% non-condensing
protection class		IP20

Table 16 Coupler Hardware Parameters

2.5.2 Introduction to interfaces

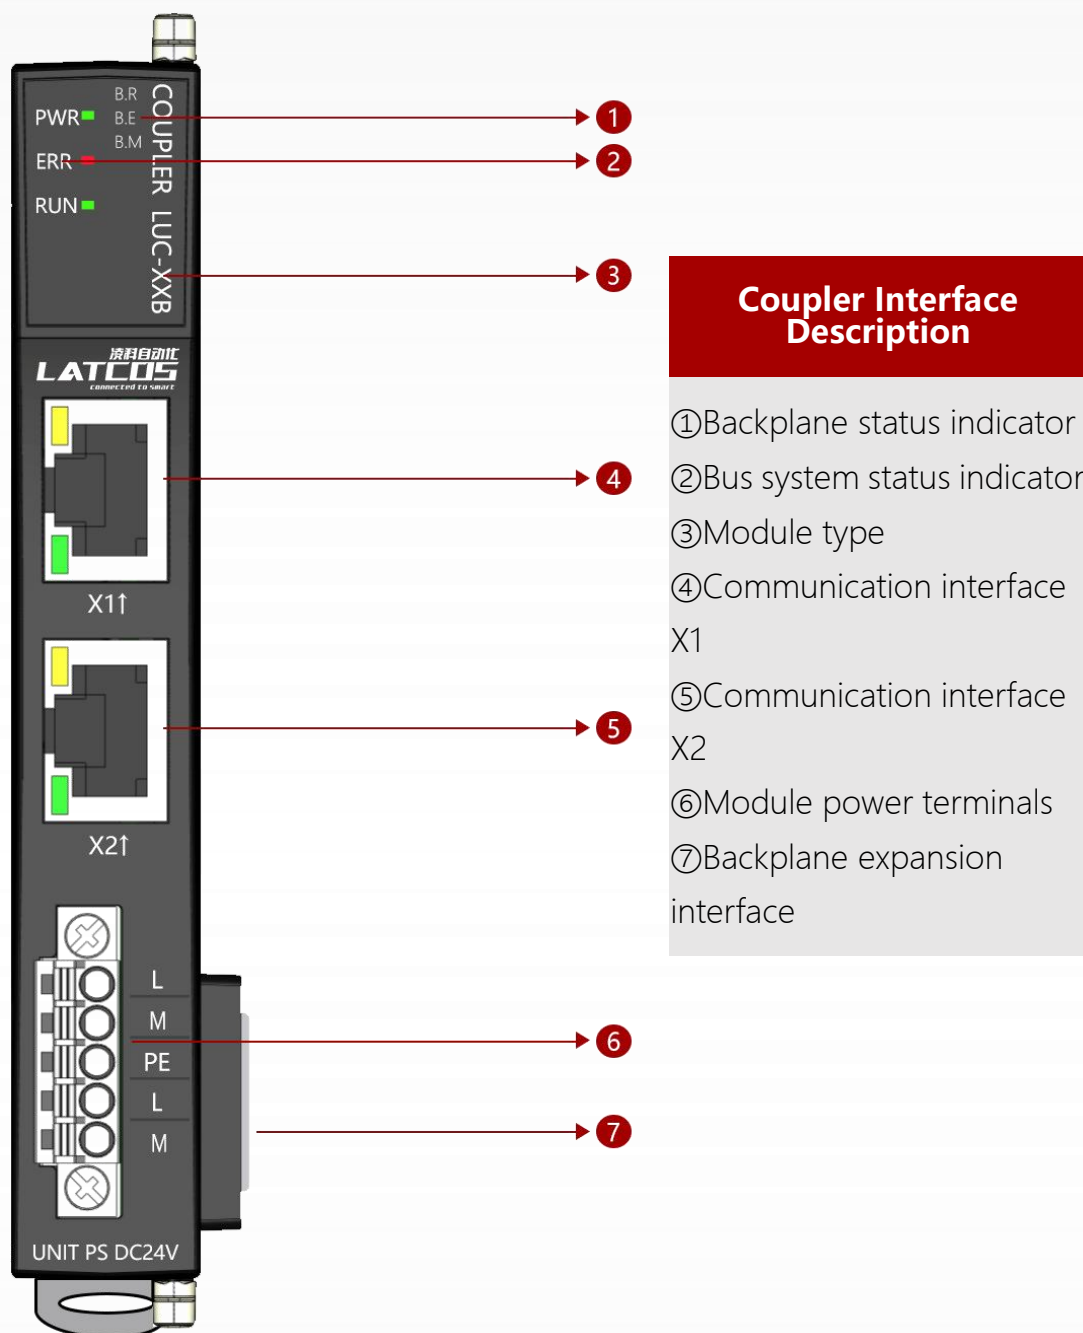

Note: X1 and X2 are Modbus-TCP communication ports, support switch function, 10M/100M adaptive rate.

2.5.3 LED indicators

The LED indicators of the module are divided into 3 parts: bus system status indicator, backplane indicator, and RJ45 link indicator.

2.5.4 System Status Indication The operating status of the system is described in Table

PWR (power supply)	ERR (Error)	RUN	clarification
			Abnormal power supply or no power supply
			communication interface failure
			The module successfully enters into operation and successfully establishes cyclic data interaction with the master.

Table 17 System Status Indication

 The green light is on  Indicates that the red light is on  Not bright

2.5.5 The operating status of the backplane indication system is described in the table below.

B.R	B.E	B.M	clarification
			Backplane activation in progress
			Backplane operating normally
			Coupler module backplane error

Table 18 System Status Indication

 The green light is on  Flashing green  Not bright

2.5.6 RJ45 indicator light

Under normal circumstances, the RJ45 port indicator should be a long green light, yellow light flashing, if not, it means that the fault occurred. Green light does not light, indicating that the RJ45 port has a connection to the Hub or switch connection is faulty; yellow light does not light, it may be the module itself is faulty as Table 19: RJ45 indicator description

LINK1/LINK2	ACT1/ACT2	clarification
	irrelevant	RJ45 port without network cable connection or poor connection
	irrelevant	RJ45 ports are correctly identified to the Ethernet network
irrelevant		No data interaction on RJ45 port
irrelevant		RJ45 port has data interaction


Table 19 RJ45 Indicator Description

2.5.7 Modbus-TCP Coupler Communication Interface

Definition


The module uses dual RJ45 sockets to communicate with the physical interface. They are identified as IN and OUT.

Table 20 Modbus-TCP communication interface



pinout	code	descriptive
1	TX+	Data transmission +
2	TX-	Data transmission -
3	RX+	Data reception+
4	NC	unused
5	NC	unused
6	RX-	Data reception -
7	NC	unused
8	NC	unused
Connector Housings	PE	grounding

2.5.8 Modbus-TCP Coupler Electrical Wiring Diagrams

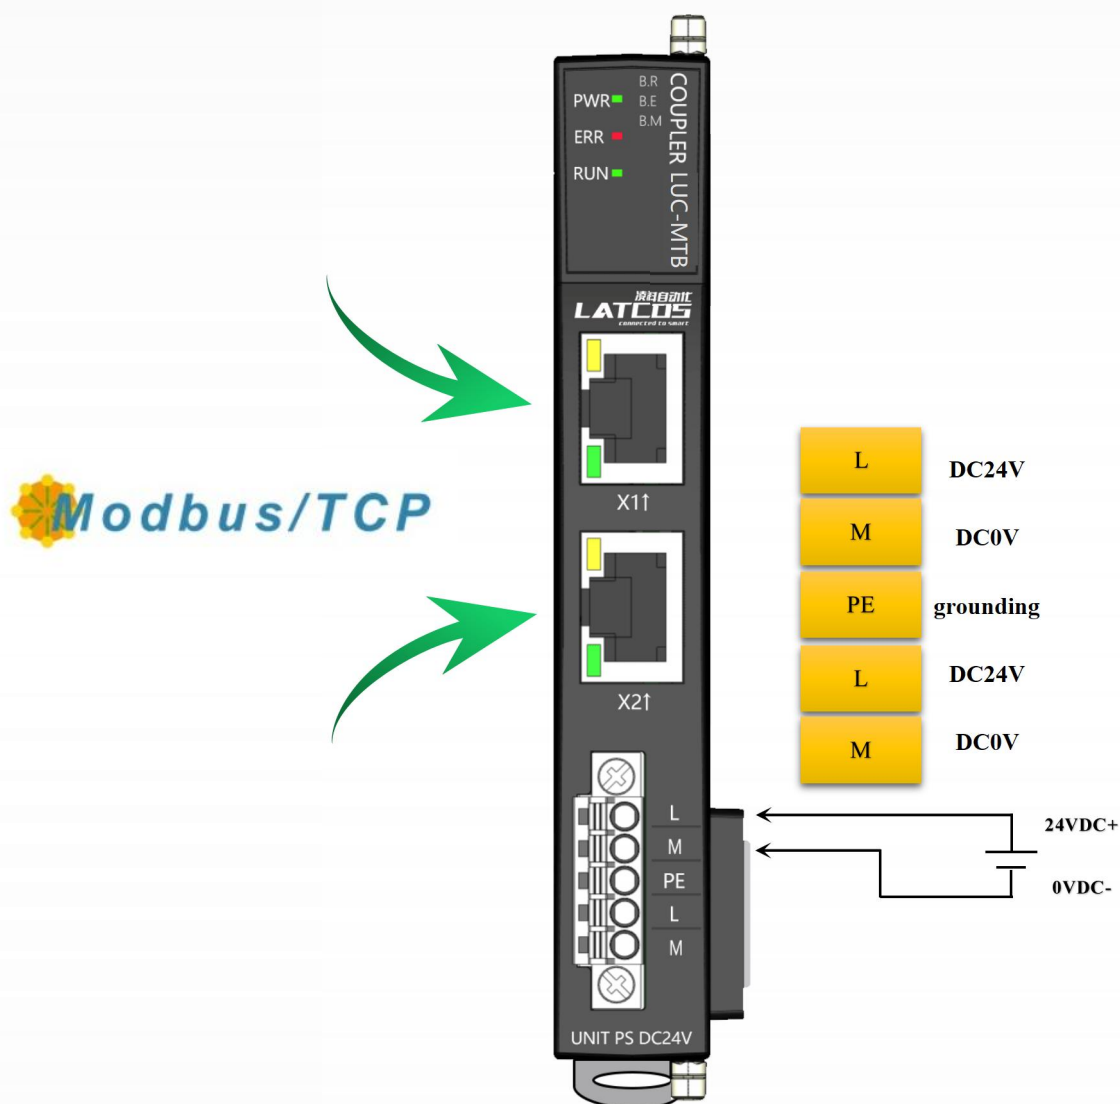

2.5.9 Network topology

The following figure shows a typical network layout for Modbus-TCP IO. As shown in Figure 2-1, 2-2, 2-3

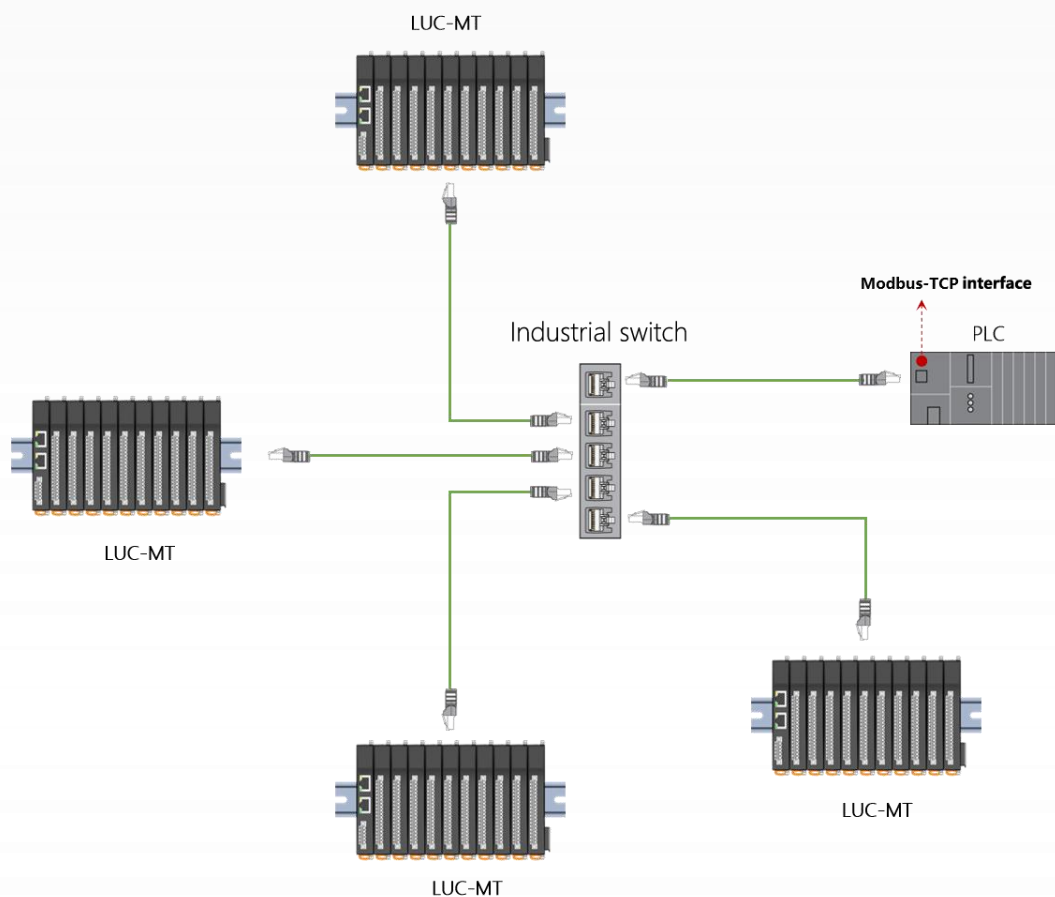


Figure 2-1 Modbus-TCP Star Network Topology

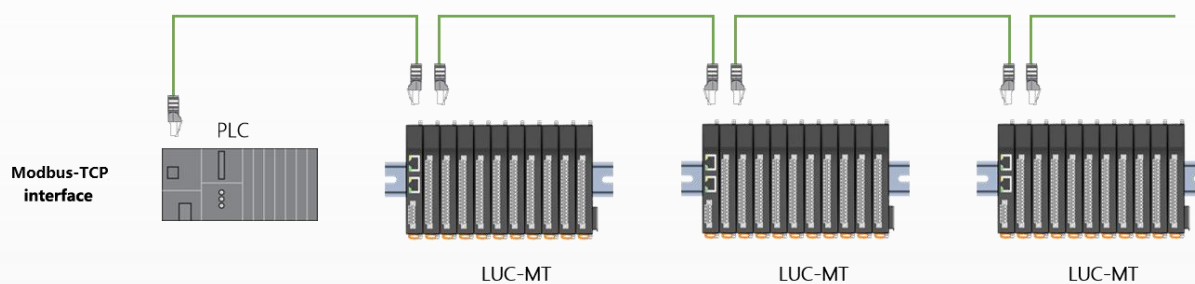


Figure 2-2 Modbus-TCP daisy chain topology

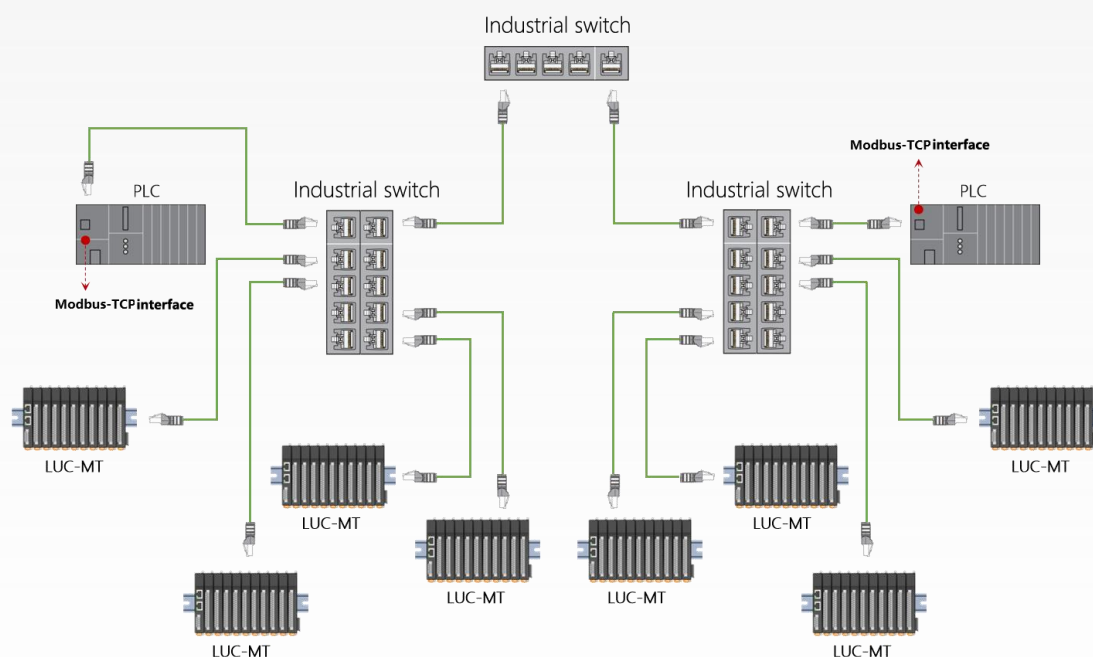


Figure 2-3 Modbus-TCP Tree Network Topology


2.5.10 Process data definition

(1), adapter process data definition

The Modbus-TCP adapter itself has no input or output process data.

(2), IO Module Process Data Mapping

The network adapter reads and writes the IO module input and output process data in real time through the internal bus, and its data mapping model is shown in the following figure:

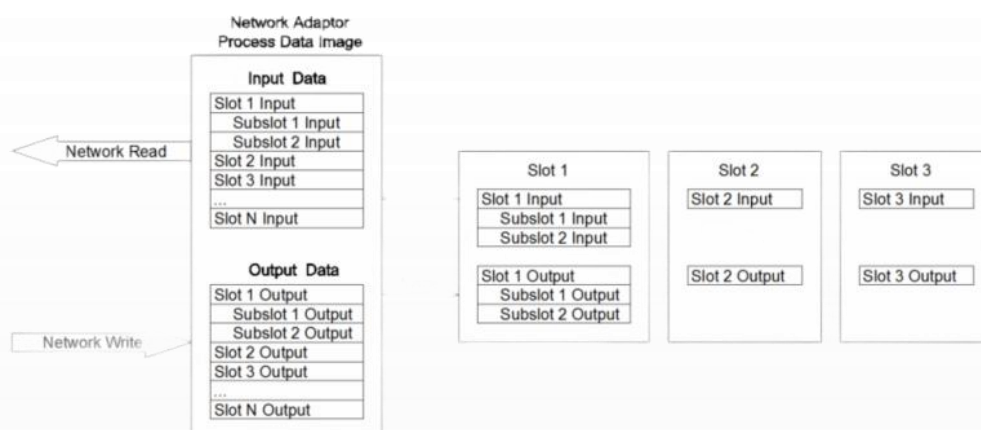

The Modbus address mapping table varies depending on the module combination, and can be viewed through the LAE Config configuration software.



3. Extension modules

3.1 ES-1160D (16-channel digital input module)


3.1.1 Module overview

- ♦ The module supports 16 channels of digital inputs, NPN or PNP inputs, input voltage DC24V.
- ♦ The module can collect digital output signals (dry contact or active output) from field devices.
- ♦ The module can access 2-wire or 3-wire digital sensors.
- ♦ The internal bus and field inputs of the module are isolated by optocouplers.
- ♦ The module comes with 16 digital input channel LED indicators.
- ♦ The module can set the digital signal input filtering time.

3.1.2 Module parameters

Hardware parameters	
model number	ES1160D
Backplane Current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	-40~85℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
input parameter	
channel number	16CH
Type of access	2 Bytes
Input Type	Source or Drain
Rated Input Voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)
"0" signal level	-3...+5 V (IEC61131-2, type 2)
"1" signal level	15...30 V (IEC61131-2, type2)
Input Current	Typ. 10mA/Ch (IEC61131-2, type 2)
Ton	Type. 18uS / Max. 35uS
Toff	Type. 135uS / Max. 250uS
electrical isolation	Input/control area: 500V DC

3.1.3 Introduction to interfaces

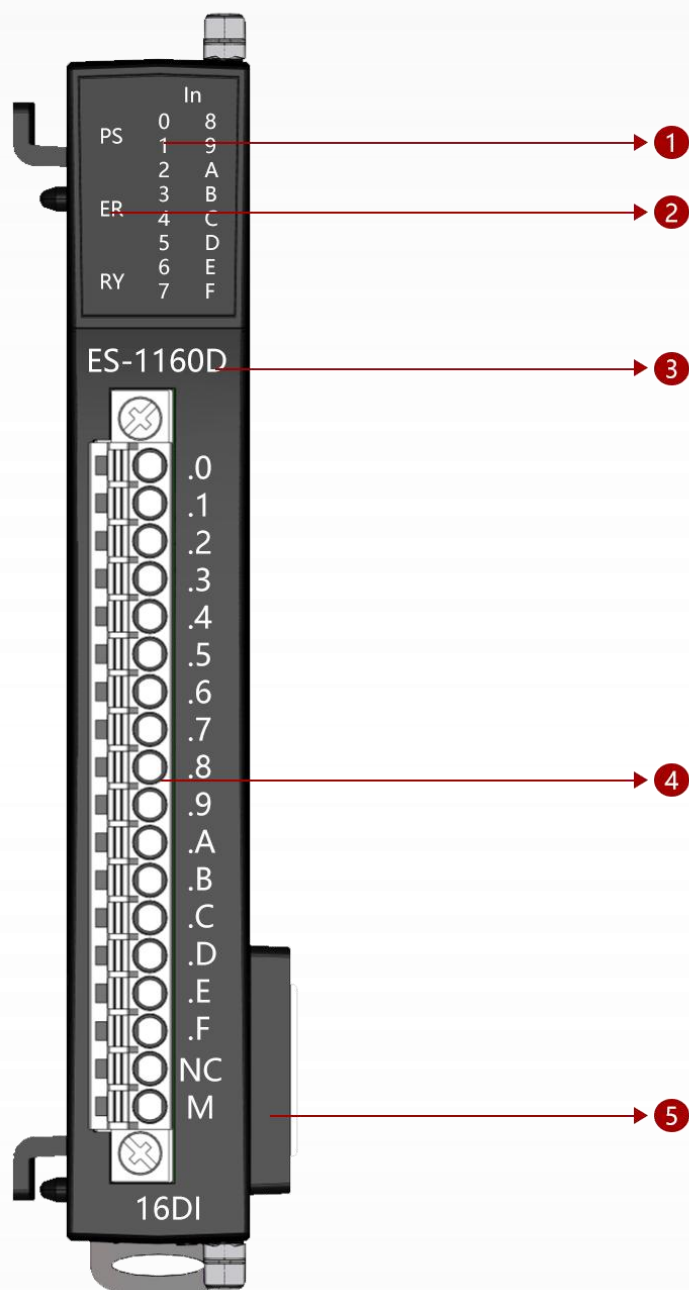

Expansion Module Interface Description

- ① Digital input status indicator
- ② Backplane system status indicator
- ③ Module type
- ④ Digital input terminal
- ⑤ Backplane Expansion Interface

3.1.4 LED indicators

The LED indicators of the module are divided into two parts: the backplane status indicator and the input status indicator.

3.1.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 21 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright


3.1.6 Input status indication

The digital input port uses a green LED to indicate the status of the corresponding channel. A bright LED indicates that the logic state of the input port is "1", and a dark LED indicates that the logic state of the input port is "0".

3.1.7 Definition of terminal blocks

Terminal Serial Number	notation	clarification
1	.0	Digital Input Signal
2	.1	
3	.2	
4	.3	
5	.4	
6	.5	
7	.6	
8	.7	
9	.8	
10	.9	
11	.A	
12	.B	
13	.C	
14	.D	
15	.E	
16	.F	
17	NC	unoccupied
18	M	Input common point

3.1.8 Wiring diagram

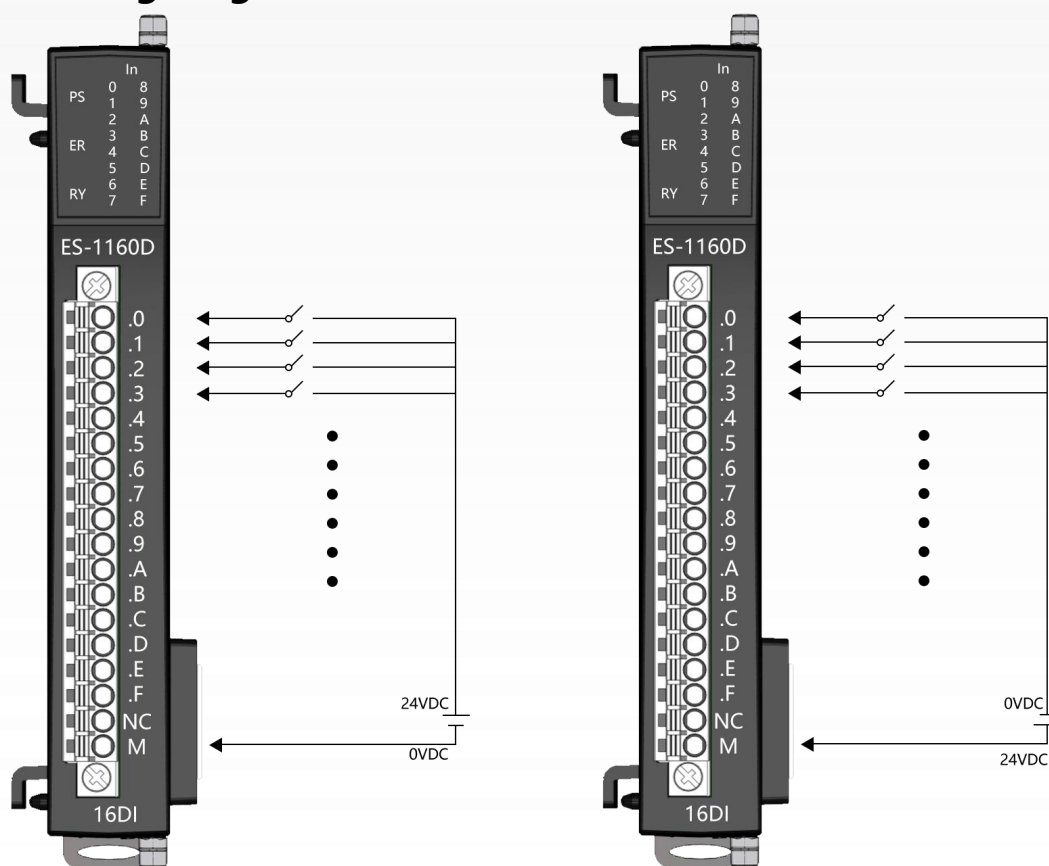

High-level input wiring method (PNP) Low-level input wiring method (NPN)

3.1.9 Process data definitions

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	.7	.6	.5	.4	.3	.2	.1	.0
BYTE 1	.F	.E	.D	.C	.B	.A	.9	.8

Data description: DI (0-F): When the corresponding channel to the input signal is valid, the position is "1"; when the input signal is invalid, the position is "0".

3.1.10 Configuration parameter definitions

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Input Filter Time (Filter)							

Data description

Parameter name		unit (of measure)	specification	Input Range	clarification
Chinese	English (language)				
Input Filter Time	Filter	ms	decimal system	0-255 (default: 5)	

3.2 ES-1320D (32-channel digital input module)


3.2.1 Module overview

- ♦ The module supports 32 channels of digital inputs, NPN or PNP inputs, and input voltage DC24V.
- ♦ The module can collect digital output signals (dry contact or active output) from field devices.
- ♦ The module can access 2-wire or 3-wire digital sensors.
- ♦ The internal bus and field inputs of the module are isolated by optocouplers.
- ♦ Module with 32 digital input channel LED indicators.
- ♦ The module can set the digital signal input filtering time.

3.2.2 Module parameters

Hardware parameters	
model number	ES1320D
Backplane Current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	-40~85℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
input parameter	
channel number	32CH
Type of access	4 Bytes
Input Type	Source or Drain
Rated Input Voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)
"0" signal level	-3...+5 V (IEC61131-2, type 2)
"1" signal level	15...30 V (IEC61131-2, type2)
Input Current	Typ. 10mA/Ch (IEC61131-2, type 2)
Ton	Type. 18uS / Max. 35uS
Toff	Type. 135uS / Max. 250uS
electrical isolation	Input/control area: 500V DC

3.2.3 Introduction to Interfaces

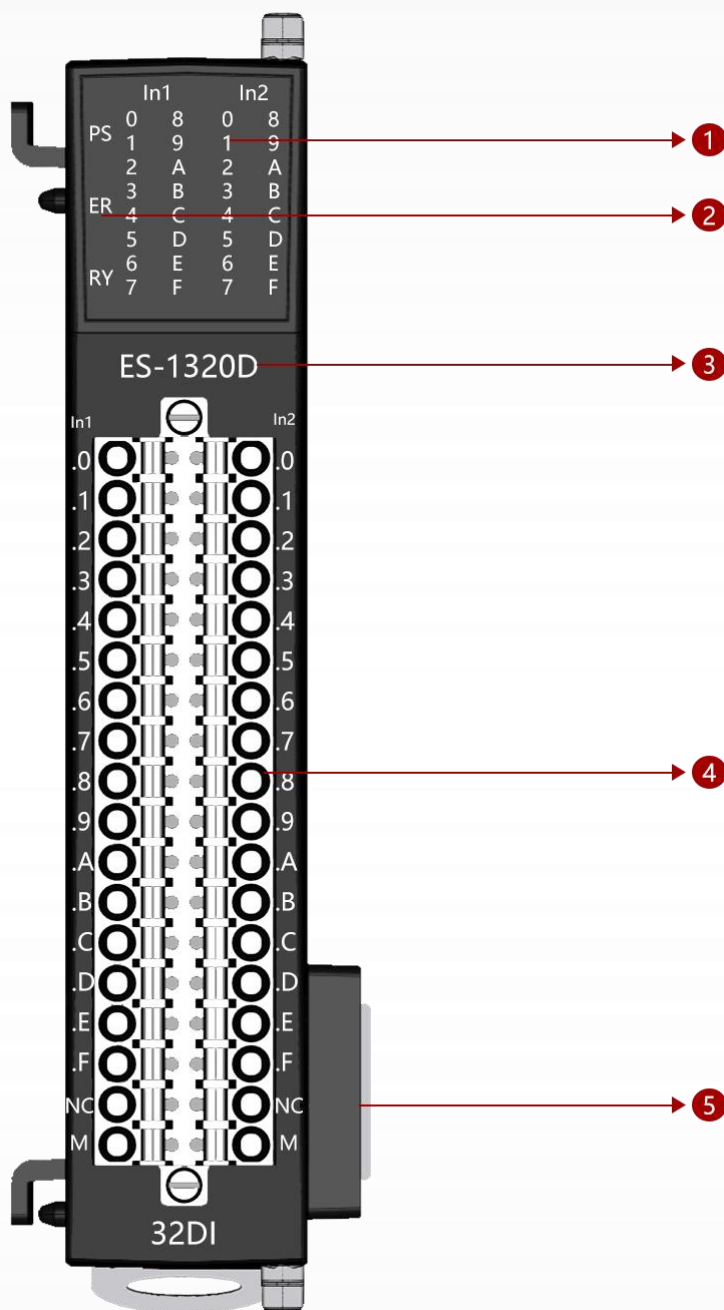

Expansion Module Interface Description

- ① Digital input status indicator
- ② Backplane system status indicator
- ③ Module type
- ④ Digital input terminal
- ⑤ Backplane Expansion Interface

3.2.4 LED indicators

The LED indicators of the module are divided into two parts: the backplane status indicator and the input status indicator.

3.2.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 22 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright


3.2.6 Input status indication

The digital input port uses a green LED to indicate the status of the corresponding channel. A bright LED indicates that the logic state of the input port is "1", and a dark LED indicates that the logic state of the input port is "0".

3.2.7 Definition of terminal blocks

Terminal Serial Number	notation	clarification	Terminal Serial Number	notation
the left side	In1		right, the right	In2
1	.0	Digital Input Signal	1	.0
2	.1		2	.1
3	.2		3	.2
4	.3		4	.3
5	.4		5	.4
6	.5		6	.5
7	.6		7	.6
8	.7		8	.7
9	.8		9	.8
10	.9		10	.9
11	.A		11	.A
12	.B		12	.B
13	.C		13	.C
14	.D		14	.D
15	.E		15	.E
16	.F		16	.F
17	NC	unoccupied	17	NC
18	M	Input common point	18	M

3.2.8 Wiring diagram

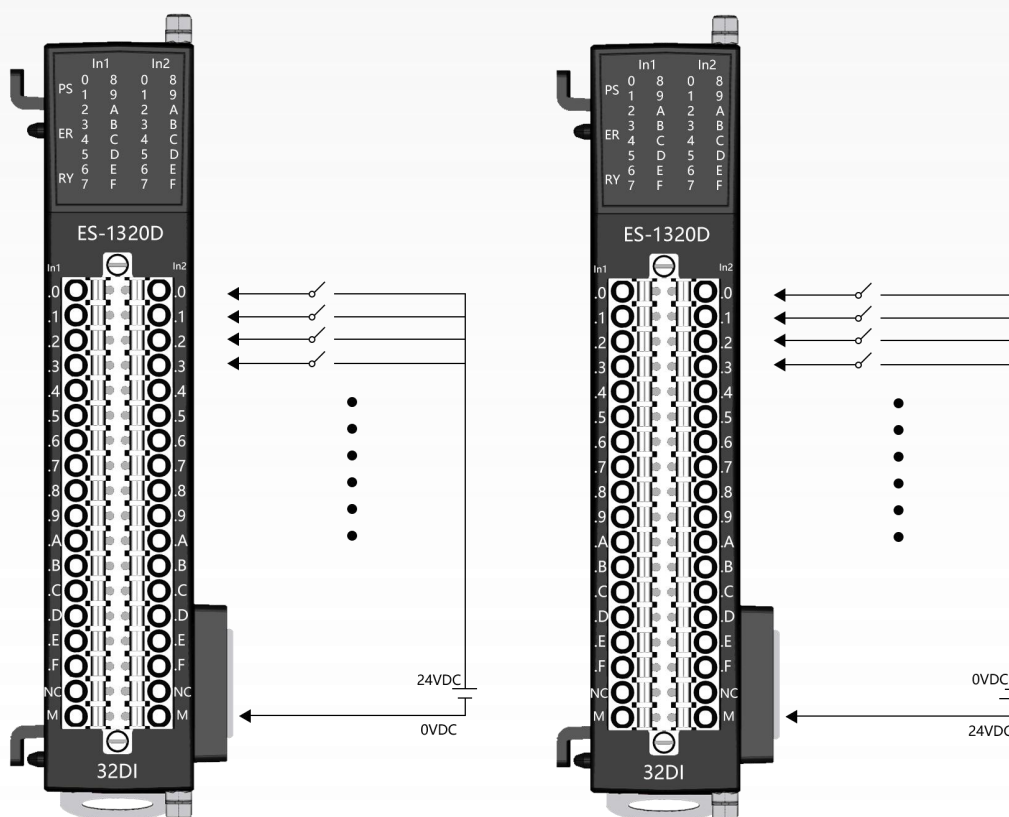

High-level input wiring method (PNP) Low-level input wiring method (NPN)

3.2.9 Process data definitions

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	.7	.6	.5	.4	.3	.2	.1	.0
BYTE 1	.F	.E	.D	.C	.B	.A	.9	.8
BYTE 2	.7	.6	.5	.4	.3	.2	.1	.0
BYTE 3	.F	.E	.D	.C	.B	.A	.9	.8

Data description: DI (0-F): When the corresponding channel to the input signal is valid, the position is "1"; when the input signal is invalid, the position is "0".

3.2.10 Configuration parameter definitions

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Input Filter Time (Filter)							

Data description

Parameter name		unit (of measure)	specification	Input Range	clarification
Chinese	English (language)				
Input Filter Time	Filter	ms	decimal system	0-255 (default: 5)	

3.3 ES-2161/ES-2162D(16-channel digital transistor output module)


3.3.1 Module overview

- ◆ The module supports 16 channels of digital output.
- ◆ ES-2161D is a high level output, ES-2162D is a low level output, output voltage DC24V.
- ◆ The module can drive field devices (intermediate relays, solenoid valves, etc.).
- ◆ The internal bus and field inputs of the module are isolated by optocouplers.
- ◆ The module supports the output signal safe mode function, which allows you to define the state of the output point in case of bus communication disconnection.
- ◆ The module comes with 16 digital output channel LED indicators.
- ◆ The module supports short circuit protection and overload protection.
- ◆ The module is equipped with thermal shutdown and overcurrent protection.

3.3.2 Module parameters

Hardware parameters		
model number	ES2161D	ES2162D
Backplane current	20MA	
Extended Interface	2*20Pin Board-to-Board Connector	
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)	
Installation	DN35 rail mounting	
Environmental parameters		
operating temperature	-40~85℃	
Environmental humidity	5%-95% non-condensing	
protection class	IP20	
output parameter		
channel number	16CH	
Type of access	2 Bytes	
Output type	Source type high level	Drain Low Output (NPN)
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)	
output connector	Plug-in connectors	
Load Type	Pure Resistive, Inductive, Bulb	
Maximum Output Current	Max. 0.5 A/Ch, independent short-circuit protection per	
Ton	Type. 2.4uS / Max. 2.4uS	
Toff	Type. 50uS / Max. 875uS (no load)	
Rated total current	8A	
electrical isolation	Input/control area: 500V DC	

3.3.3 Introduction to interfaces

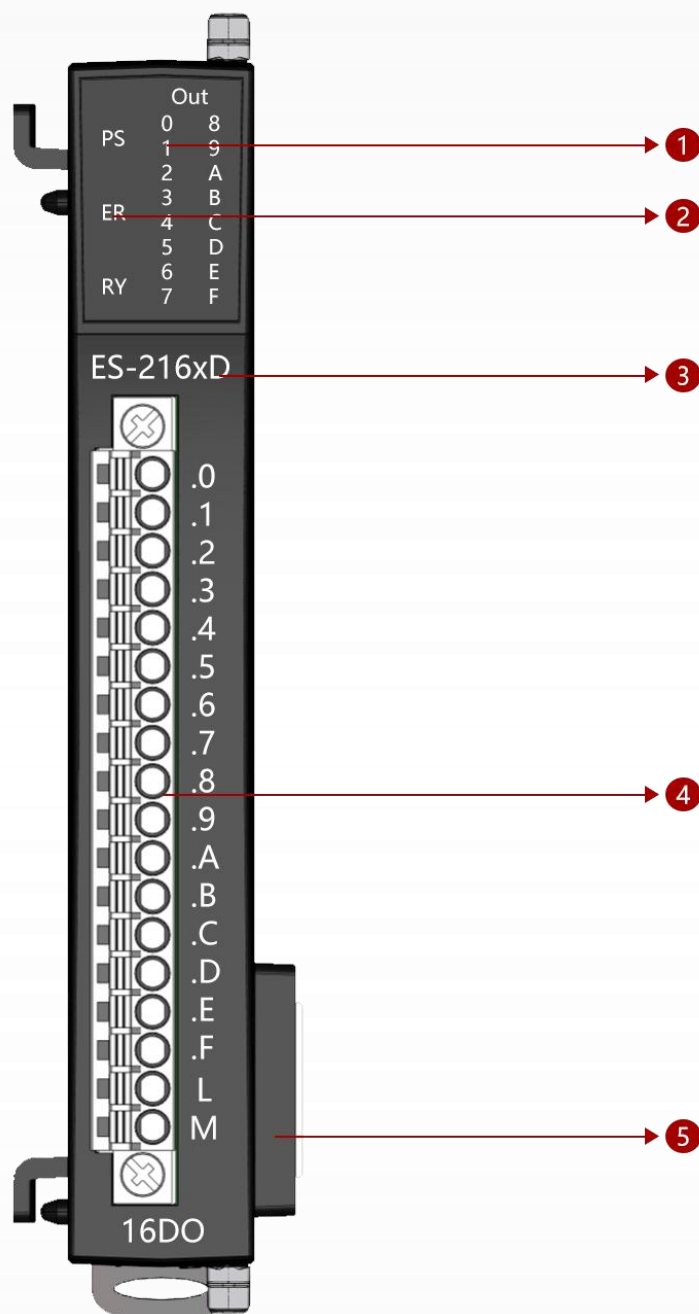

Expansion Module Interface Description

- ① Digital output status indicator
- ② Backplane system status indicator
- ③ Module type
- ④ Digital output terminal
- ⑤ Backplane Expansion Interface

3.2.4 LED indicators

The LED indicators of the module are divided into two parts: the backplane status indicator and the output status indicator.

3.3.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 23 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright


3.3.6 Output status indication

The digital output ports use green LEDs to indicate the status of the corresponding channels. A bright light indicates that the output port logic status is "1", and a dark light indicates that the output port logic status is "0".

3.3.7 Definition of terminal blocks

Terminal Serial Number	notation	clarification
1	.0	Digital Output Signal
2	.1	
3	.2	
4	.3	
5	.4	
6	.5	
7	.6	
8	.7	
9	.8	
10	.9	
11	.A	
12	.B	
13	.C	
14	.D	
15	.E	
16	.F	
17	L	External power supply 24V+
18	M	External power supply 24V-

3.3.8 Wiring diagram

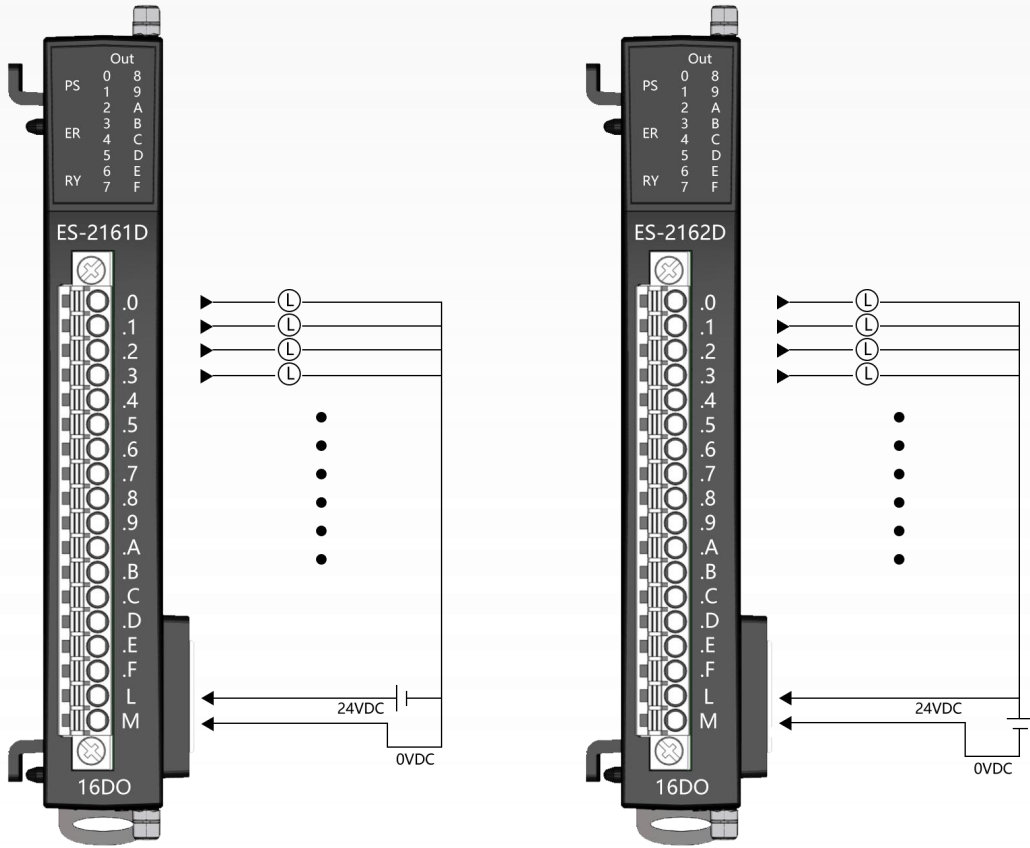

High level output wiring method (PNP) Low level output wiring method (NPN)

3.3.9 Process data definitions

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	.7	.6	.5	.4	.3	.2	.1	.0
BYTE 1	.F	.E	.D	.C	.B	.A	.9	.8

Data Description: DQ (0-F): If the output data of the corresponding channel is "1", then this position will output; if the output data of the corresponding channel is "0", then this position will not output.

3.3.10 Configuration parameter definitions

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0 (DO Error_Mod e bits 0-7)	DO Error_Mod e For .7	DO Error_Mod e For .6	DO Error_Mod e For .5	DO Error_Mod e For .4	DO Error_Mod e For .3	DO Error_Mod e For .2	DO Error_Mod e For .1	DO Error_Mod e For .0
BYTE 1 (DO Error_Valu e bits 0-7)	DO Error Value For .7	DO Error Value For .6	DO Error Value For .5	DO Error Value For .4	DO Error Value For .3	DO Error Value For .2	DO Error Value For .1	DO Error Value For .0
BYTE 2 (DO Error_Mod e bits 8-15)	DO Error_Mod e For .	DO Error_Mod e For .	DO Error_Mod e For .	DO Error_Mod e For .	DO Error_Mod e For .	DO Error_Mod e For .	DO Error_Mod e For .9	DO Error_Mod e For .8
BYTE 3 (DO Error_Valu e bits 8-15)	DO Error Value For .F	DO Error Value For .E	DO Error Value For .D	DO Error Value For .C	DO Error Value For .B	DO Error Value For .A	DO Error Value For .9	DO Error Value For .8

Data Description:

Parameter name		unit (of mea sure)	specific ation	Input Range	clarification
Chinese	English (language)				
Failure mode enable	DO Error_Mode bits	-	decimal system	0-255 (Default: 0)	Fail-safe state value enable for DQ0.x port, the binary bit of this parameter corresponds to DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). When the module enters the fail-safe state, if the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). If the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the corresponding DQ0.x port.
Fault value Safety status value	DO Error_Value bits	-	decimal system	0-255 (Default: 0)	If the binary bit corresponding to the "Error Mode [7..0]" parameter is set to enable, the value of this parameter is output to the DQ port when the system enters the fail-safe state.

3.4 ES-2321/ES-2322D (32-channel digital transistor output module)


3.4.1 Module overview

- ◆ The module supports 32 channels of digital output.
- ◆ ES-2321D is a high level output, ES-2322D is a low level output, output voltage DC24V.
- ◆ The module can drive field devices (intermediate relays, solenoid valves, etc.).
- ◆ The internal bus and field inputs of the module are isolated by optocouplers.
- ◆ The module supports the output signal safe mode function, which allows you to define the state of the output point in case of bus communication disconnection.
- ◆ The module comes with 32 digital output channel LED indicators.
- ◆ The module supports short circuit protection and overload protection.
- ◆ The module is equipped with thermal shutdown and overcurrent protection.

3.4.2 Module parameters

Hardware parameters		
model number	ES2321D	ES2322D
Backplane Current	20MA	
Extended Interface	2*20Pin Board-to-Board Connector	
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)	
Installation	DN35 rail mounting	
Environmental parameters		
operating temperature	-40~85℃	
Environmental humidity	5%-95% non-condensing	
protection class	IP20	
output parameter		
channel number	32CH	
Type of access	4 Bytes	
Output type	Source Type High Level	Drain Low Output (NPN)
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)	
output connector	Plug-in connectors	
Load Type	Pure Resistive, Inductive, Bulb	
Maximum Output Current	Max. 0.5 A/Ch, independent short-circuit protection per	
Ton	Type. 2.4uS / Max. 2.4uS	
Toff	Type. 50uS / Max. 875uS (no load)	
Rated total current	8A	
electrical isolation	Input/control area: 500V DC	

3.4.3 Introduction to interfaces

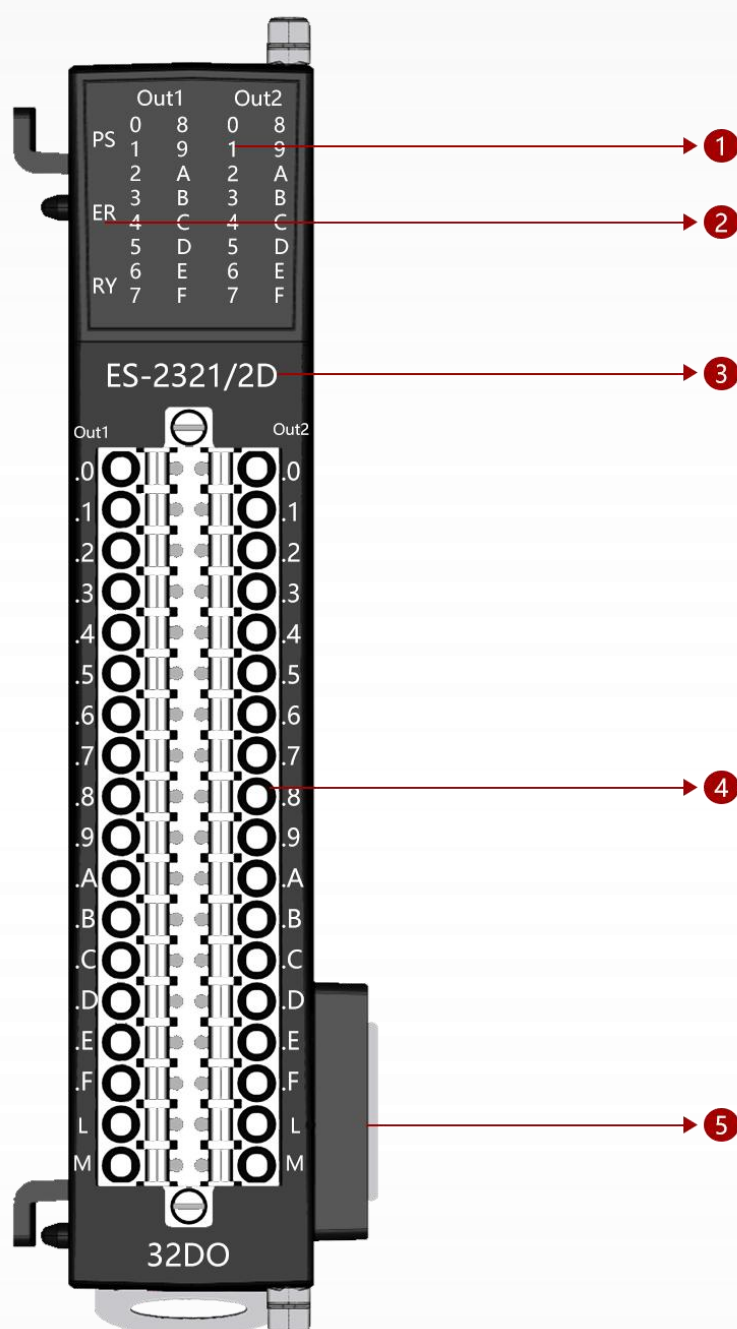

Expansion Module Interface Description

- ① Digital output status indicator
- ② Backplane system status indicator
- ③ Module type
- ④ Digital output terminal
- ⑤ Backplane Expansion Interface

3.2.4 LED indicators

The LED indicators of the module are divided into two parts: the backplane status indicator and the output status indicator.

3.4.5 The operating status of the backplane indication

system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 24 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright


3.4.6 Output status indication

The digital output ports use green LEDs to indicate the status of the corresponding channels. A bright light indicates that the output port logic status is "1", and a dark light indicates that the output port logic status is "0".

3.4.7 Definition of terminal blocks

Terminal Serial Number	notation	clarification	Terminal Serial Number	notation
the left side	Out1		right, the right	Out2
1	.0	Digital Output Signal	1	.0
2	.1		2	.1
3	.2		3	.2
4	.3		4	.3
5	.4		5	.4
6	.5		6	.5
7	.6		7	.6
8	.7		8	.7
9	.8		9	.8
10	.9		10	.9
11	.A		11	.A
12	.B		12	.B
13	.C		13	.C
14	.D		14	.D
15	.E		15	.E
16	.F		16	.F
17	L	External power supply 24V+	17	L
18	M	External power supply 24V-	18	M

3.4.8 Wiring diagram

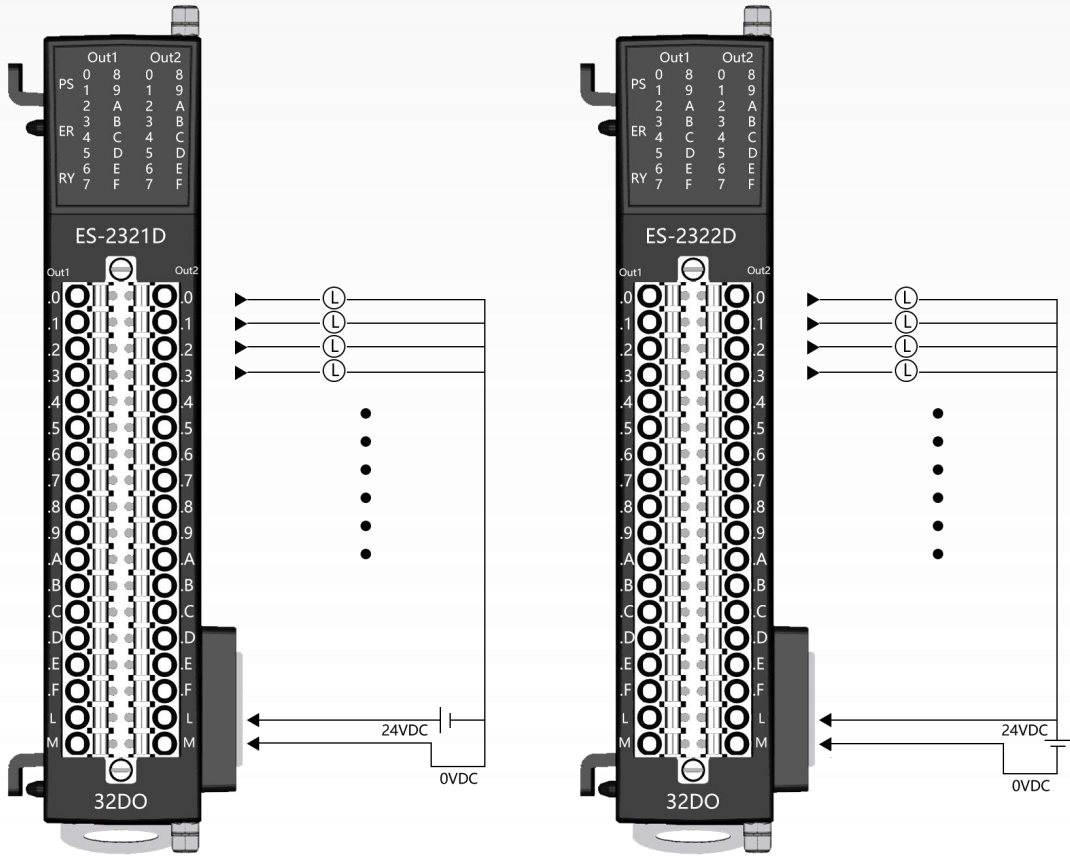

High level output wiring method (PNP) Low level output wiring method (NPN)

3.4.9 Process data definitions

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	.7	.6	.5	.4	.3	.2	.1	.0
BYTE 1	.F	.E	.D	.C	.B	.A	.9	.8
BYTE 2	.7	.6	.5	.4	.3	.2	.1	.0
BYTE 3	.F	.E	.D	.C	.B	.A	.9	.8

Data Description: DQ (0-F): If the output data of the corresponding channel is "1", then this position will output; if the output data of the corresponding channel is "0", then this position will not output.

3.4.10 Configuration parameter definitions

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0 (DO Error_Mo de bits 0-7)	DO Error_Mo de For .7	DO Error_Mo de For .6	DO Error_Mo de For .5	DO Error_Mo de For .4	DO Error_Mo de For .3	DO Error_Mo de For .2	DO Error_Mo de For .1	DO Error_Mo de For .0
BYTE 1 (DO Error_Val ue bits 0-7)	DO Error Value For .7	DO Error Value For .6	DO Error Value For .5	DO Error Value For .4	DO Error Value For .3	DO Error Value For .2	DO Error Value For .1	DO Error Value For .0
BYTE 2 (DO Error_Mo de bits 8-15)	DO Error_Mo de For .	DO Error_Mo de For .	DO Error_Mo de For .	DO Error_Mo de For .	DO Error_Mo de For .	DO Error_Mo de For .	DO Error_Mo de For .9	DO Error_Mo de For .8
BYTE 3 (DO Error_Val ue bits 8-15)	DO Error Value For .F	DO Error Value For .E	DO Error Value For .D	DO Error Value For .C	DO Error Value For .B	DO Error Value For .A	DO Error Value For .9	DO Error Value For .8
.....								

Data Description:

Parameter name		unit (of measure)	specific ation	Input Range	clarification
Failure mode enable	DO Error_Mode bits	-	decimal system	0-255 (Default: 0)	Fail-safe state value enable for DQ0.x port, the binary bit of this parameter corresponds to DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). When the module enters the fail-safe state, if the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). If the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the corresponding DQ0.x port.
Fault value Safety status value	DO Error_Value bits	-	decimal system	0-255 (Default: 0)	If the binary bit corresponding to the "Error Mode [7..0]" parameter is set to enable, the value of this parameter is output to the DQ port when the system enters the fail-safe state.

3.5 ES-2083D (8-channel digital relay output module)


3.5.1 Module overview

- ◆ The module supports 8 channels of digital relay outputs rated at 5A.
- ◆ The module can drive field devices (intermediate relays, solenoid valves, etc.).
- ◆ The internal bus and field inputs of the module are isolated by optocouplers.
- ◆ The module supports the output signal safe mode function, which allows you to define the state of the output point in case of bus communication disconnection.
- ◆ The module comes with 8 digital output channel LED indicators.

3.5.2 Module parameters

Hardware parameters	
model number	ES2083D
Backplane Current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	-40~85℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
output parameter	
channel number	8CH
Type of access	1 Bytes
Output type	relay output
output connector	Plug-in connectors
Load Type	Pure Resistive, Inductive, Bulb
Maximum Output Current	Max. 5 A/Ch, independent per channel
Ton	Type. 12uS / Max. 25uS
Toff	Type. 10mS / Max. 20mS (no load)
electrical isolation	Input/control area: 500V DC

3.5.3 Introduction to interfaces

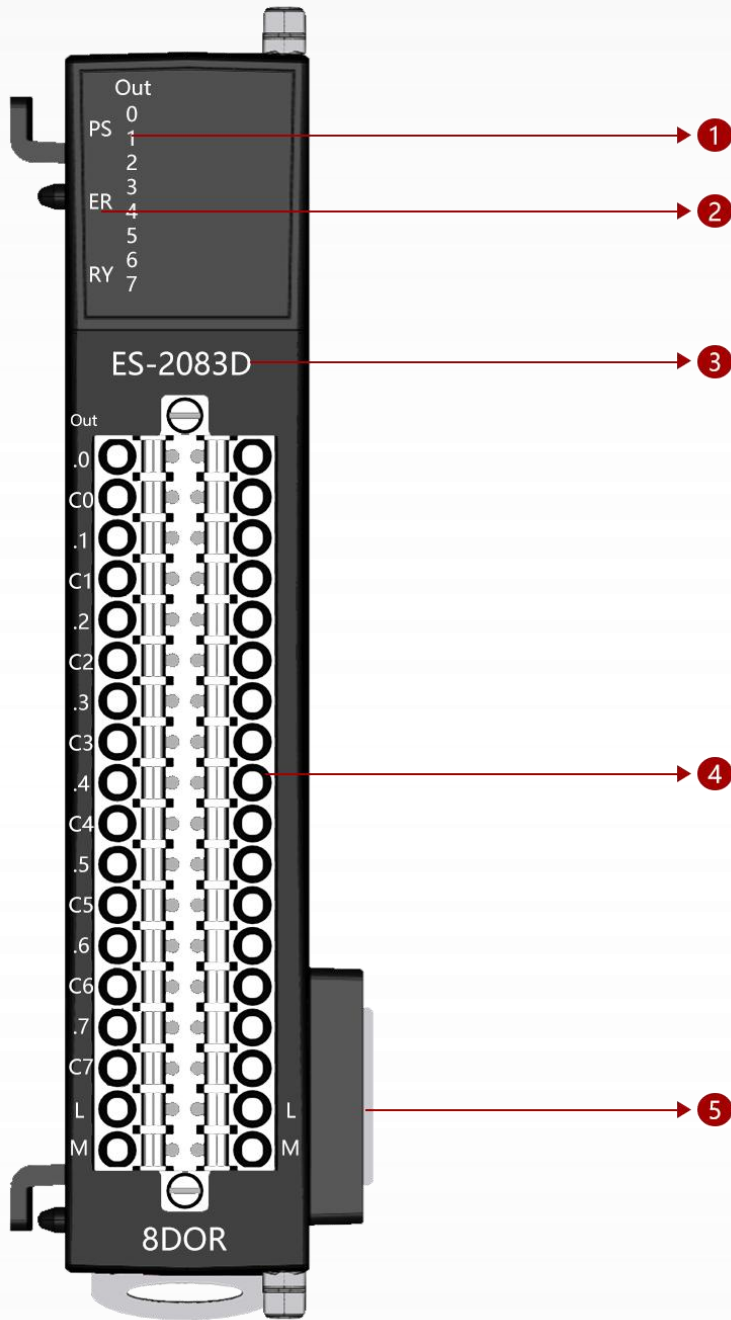

Expansion Module Interface Description

- ① Digital output status indicator
- ② Backplane system status indicator
- ③ Module type
- ④ Digital output terminal
- ⑤ Backplane Expansion Interface

3.5.4 LED indicators

The LED indicators of the module are divided into two parts: the backplane status indicator and the output status indicator.

3.5.5 The operating status of the backplane indication

system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 25 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright


3.5.6 Output status indication

The digital output ports use green LEDs to indicate the status of the corresponding channels. A bright light indicates that the output port logic status is "1", and a dark light indicates that the output port logic status is "0".

3.5.7 Definition of terminal blocks

Terminal Serial Number	notation	Terminal Serial Number	notation	clarification
the left side	out	right, the right		
1	.0	1	In parallel with the left	Digital Output Signal
2	C0	2	In parallel with the left	
3	.1	3	In parallel with the left	
4	C1	4	In parallel with the left	
5	.2	5	In parallel with the left	
6	C2	6	In parallel with the left	
7	.3	7	In parallel with the left	
8	C3	8	In parallel with the left	
9	.4	9	In parallel with the left	
10	C4	10	In parallel with the left	
11	.5	11	In parallel with the left	
12	C5	12	In parallel with the left	
13	.6	13	In parallel with the left	
14	C6	14	In parallel with the left	
15	.7	15	In parallel with the left	
16	C7	16	In parallel with the left	
17	L	17	L	External power supply 24V+
18	M	18	M	External power supply 24V-

3.5.8 Wiring diagram

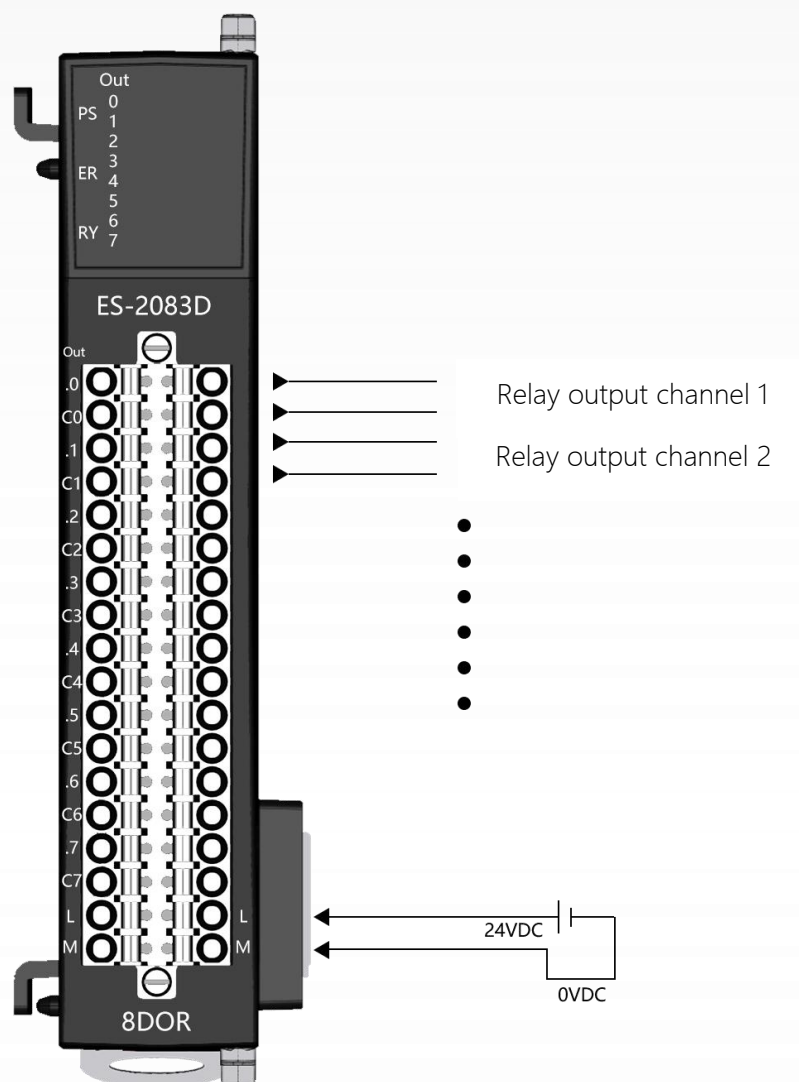

3.5.9 Process data definitions

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	.7	.6	.5	.4	.3	.2	.1	.0

Data Description: DQ (0-F): If the output data of the corresponding channel is "1", then this position will output; if the output data of the corresponding channel is "0", then this position will not output.

3.5.10 Configuration parameter definitions

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0 (DO Error_ Mode bits 0-7)	DO Error_ Mode For .7	DO Error_ Mode For .6	DO Error_ Mode For .5	DO Error_ Mode For .4	DO Error_ Mode For .3	DO Error_ Mode For .2	DO Error_ Mode For .1	DO Error_ Mode For .0
BYTE 1 (DO Error_ Value bits 0-7)	DO Error Value For .7	DO Error Value For .6	DO Error Value For .5	DO Error Value For .4	DO Error Value For .3	DO Error Value For .2	DO Error Value For .1	DO Error Value For .0

Data Description:

Parameter name		unit (of mea sure)	specifica tion	Input Range	clarification
Chinese writing	English (language)				
Failure mode enable	DO Error_Mode bits	-	decimal system	0-255 (Default: 0)	Fail-safe state value enable for DQ0.x port, the binary bit of this parameter corresponds to DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). When the module enters the fail-safe state, if the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). If the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the corresponding DQ0.x port.
Fault value Safety status value	DO Error_Value bits	-	decimal system	0-255 (Default: 0)	If the binary bit corresponding to the "Error Mode [7..0]" parameter is set to enable, the value of this parameter is output to the DQ port when the system enters the fail-safe state.

3.6 ES-2163D (16-channel Digital Relay Output Module)


3.6.1 Module Overview

- ◆The module supports 16-channel digital relay outputs with a rated current of 5A.
- ◆The module can drive on-site devices (such as intermediate relays, solenoid valves, etc.).
- ◆The internal bus and on-site inputs of the module are isolated by optocouplers.
- ◆The module supports the safety mode function of output signals, allowing the status of output points to be defined in the case of disconnection of the bus communication.
- ◆The module is equipped with 16 LED indicator lights for digital output channels.

3.6.2 Module parameters

Hardware parameters	
model number	ES-2163D
Backplane Current	20MA
Extended Interface	2*20PinBoard-to-board connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35Guide rail installation
Environmental parameters	
operating temperature	-20°C~75°C
Environmental humidity	5%~95%
protection class	IP20 No condensation
output parameter	
Channel number	16CH
Access type	2 Bytes
Output type	Relay output
Output connector	Plug-in connector
Load type	Pure resistive, inductive, bulb
Maximum output current	Max. 5 A/Channel, independent for each channel
Ton	Type. 12uS / Max. 25uS
Toff	Type. 10mS / Max. 20mS(Empty load)
Electrical isolation	Input/Control Area: 500V DC

3.6.3 Introduction to interfaces

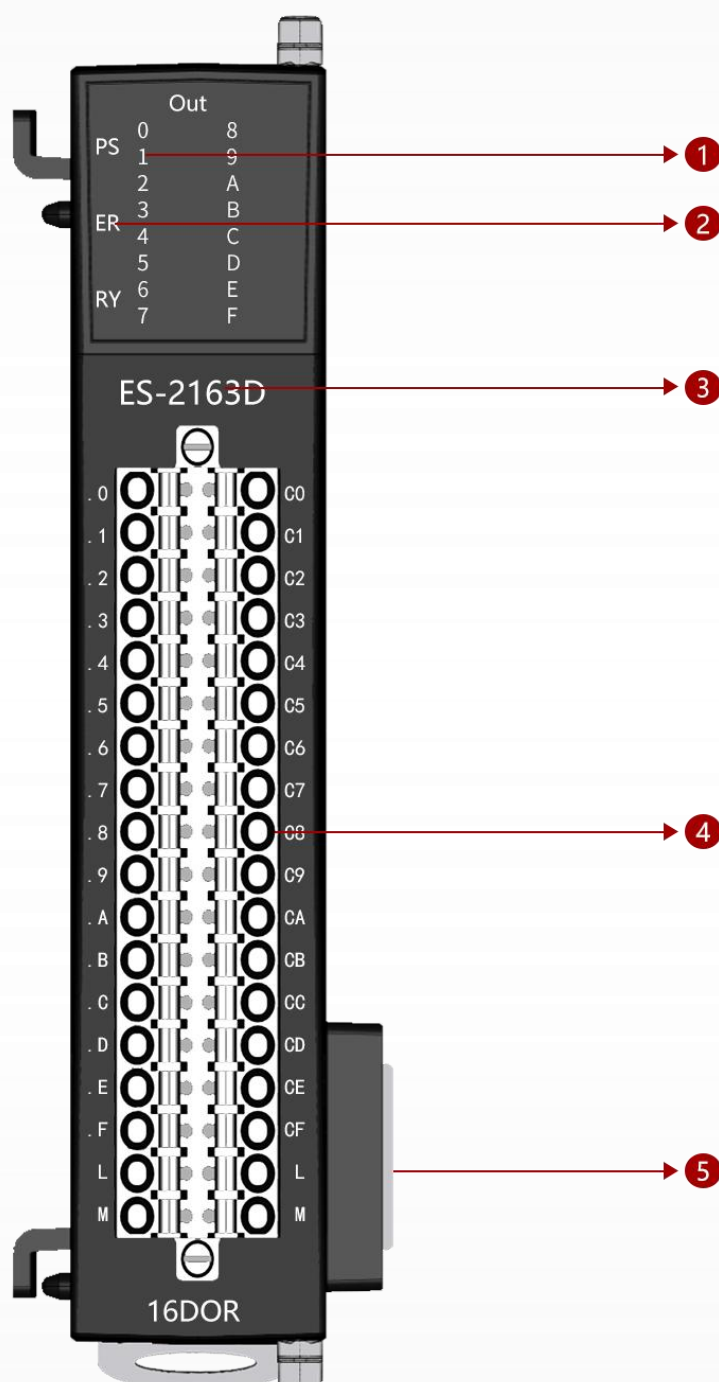

Expansion Module Interface Description

- ① Digital output status indicator
- ② Backplane system status indicator
- ③ Module type
- ④ Digital output terminal
- ⑤ Backplane Expansion Interface

3.6.4 LED indicators

The LED indicators of the module are divided into two parts: the backplane status indicator and the output status indicator.

3.6.5 The description of the working status of the back panel indication system is as follows in the table.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 26 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright


3.6.6 Output status indication

The digital output ports use green LEDs to indicate the status of the corresponding channels. A bright light indicates that the output port logic status is "1", and a dark light indicates that the output port logic status is "0".

3.6.7 Terminal connection definition

Terminal number	Symbol	Terminal number	Symbol	Explanation
Left side	Out	right side		
1	.0	1	C0	Contact output: .x and Cx
2	.1	2	C1	
3	.2	3	C2	
4	.3	4	C3	
5	.4	5	C4	
6	.5	6	C5	
7	.6	7	C6	
8	.7	8	C7	
9	.8	9	C8	
10	.9	10	C9	
11	.A	11	CA	
12	.B	12	CB	
13	.C	13	CC	
14	.D	14	CD	
15	.E	15	CE	
16	.F	16	CF	
17	L	17	L	External power supply 24V+
18	M	18	M	External power supply 24V-

3.6.8 Wiring diagram

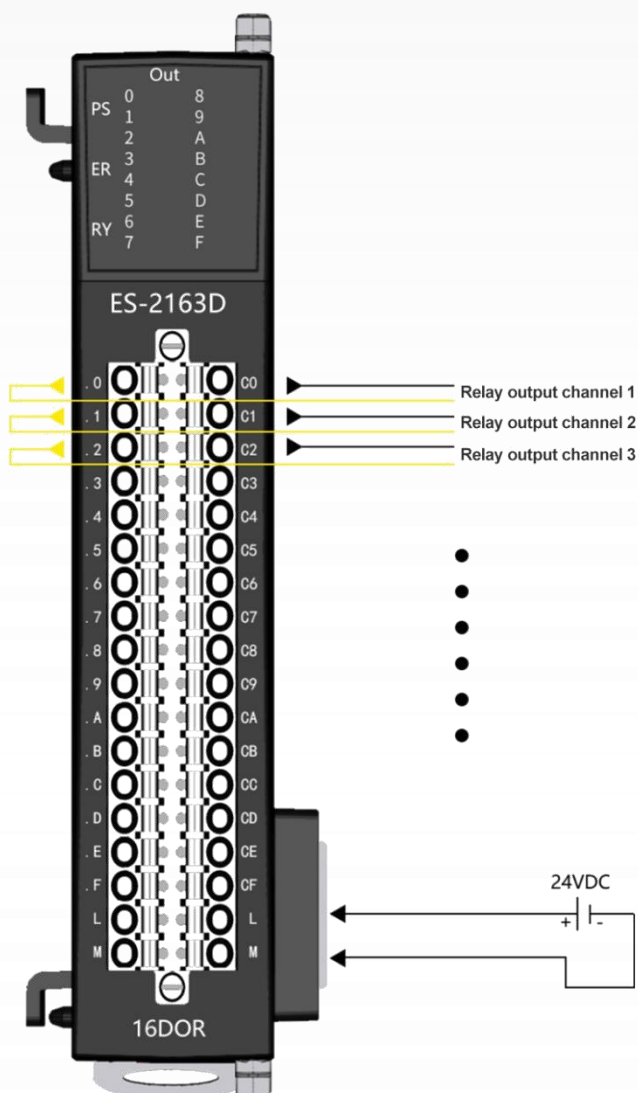

3.6.9 Process data definition

Output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	.7	.6	.5	.4	.3	.2	.1	.0
BYTE 1	.F	.E	.D	.C	.B	.A	.9	.8

Data Description: DQ (0-F): When the corresponding channel is connected to a valid input signal, this position is "1"; when the input signal is invalid, this position is "0".

3.6.10 Configuration parameter definition

Output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0 (DO Error_ Mode bits 0-7)	DO Error_ Mode For .7	DO Error_ Mode For .6	DO Error_ Mode For .5	DO Error_ Mode For .4	DO Error_ Mode For .3	DO Error_ Mode For .2	DO Error_ Mode For .1	DO Error_ Mode For .0
BYTE 1 (DO Error_ Value bits 0-7)	DO Error Value For .7	DO Error Value For .6	DO Error Value For .5	DO Error Value For .4	DO Error Value For .3	DO Error Value For .2	DO Error Value For .1	DO Error Value For .0
BYTE 2 (DO Error_ Mode bits 8-F)	DO Error_ Mode For .F	DO Error_ Mode For .E	DO Error_ Mode For .D	DO Error_ Mode For .C	DO Error_ Mode For .B	DO Error_ Mode For .A	DO Error_ Mode For .9	DO Error_ Mode For .8
BYTE 3 (DO Error_ Value bits 8-F)	DO Error Value For .F	DO Error Value For .E	DO Error Value For .D	DO Error Value For .C	DO Error Value For .B	DO Error Value For .A	DO Error Value For .9	DO Error Value For .8

Data Explanation:

Parameter name		unit (of measur e)	specifica tion	Input Range	clarification
Failure mode enable	DO Error_Mode bits	-	decimal system	0-255 (Default: 0)	Fail-safe state value enable for DQ0.x port, the binary bit of this parameter corresponds to DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). When the module enters the fail-safe state, if the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). If the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the corresponding DQ0.x port.
Fault value Safety status value	DO Error_Value bits	-	decimal system	0-255 (Default: 0)	If the binary bit corresponding to the "Error Mode [7..0]" parameter is set to enable, the value of this parameter is output to the DQ port when the system enters the fail-safe state.

3.7 ES-2041D/ES-2042D (4-channel digital 2A output module)


3.6.1 Module overview

- ◆ The module supports 4 channels of digital transistor outputs rated at 2A.
- ◆ The module can drive field devices (intermediate relays, solenoid valves, etc.).
- ◆ The internal bus and field inputs of the module are isolated by optocouplers.
- ◆ The module supports the output signal safe mode function, which allows you to define the state of the output point in case of bus communication disconnection.
- ◆ The module comes with 4 digital output channel LED indicators.

3.6.2 Module parameters

Hardware parameters		
model number	ES2041D	ES2042D
Backplane current	20MA	
Extended Interface	2*20Pin Board-to-Board Connector	
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)	
Installation	DN35 rail mounting	
Environmental parameters		
operating temperature	-40~85℃	
Environmental humidity	5%-95% non-condensing	
protection class	IP20	
output parameter		
channel number	4CH	
Type of access	4 bits	
Output type	Source Type High Level	Drain Low Output (NPN)
output connector	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)	
Load Type	Plug-in connectors	
Maximum Output Current	Pure Resistive, Inductive, Bulb	
Ton	Max. 2 A/Ch, independent short-circuit protection per	
Toff	Type. 2.4uS / Max. 2.4uS	
electrical isolation	Type. 50uS / Max. 875uS (no load)	

3.6.3 Introduction to interfaces

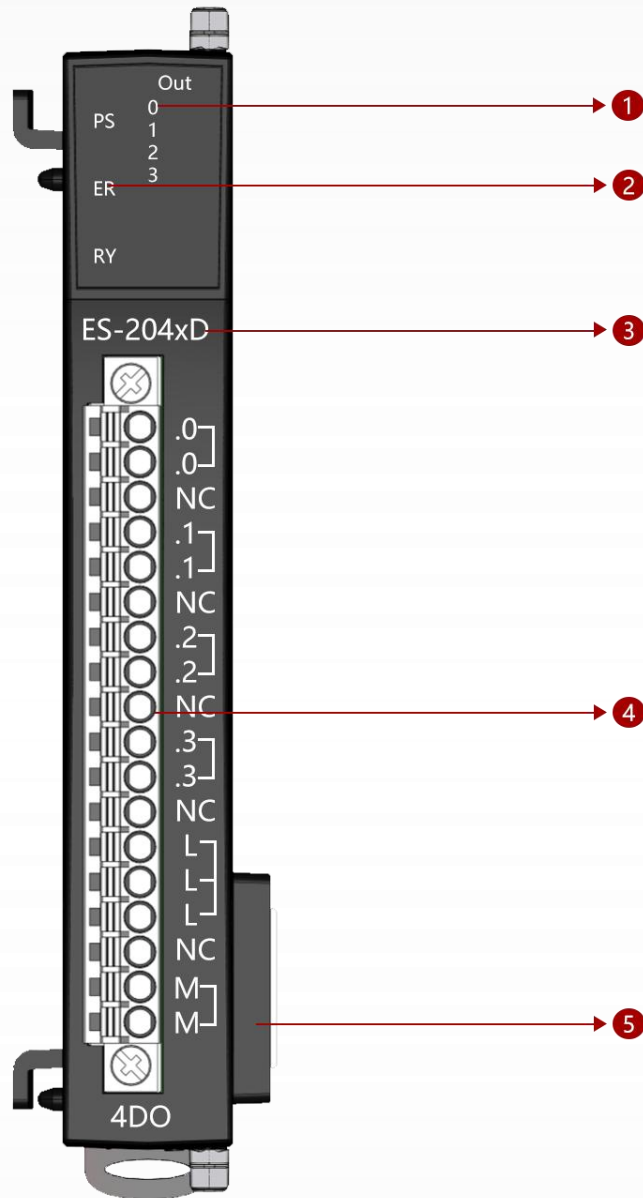

Expansion Module Interface Description

①Digital output status indicator

②Backplane system status indicator

③Module type

④Digital output terminal

⑤Backplane Expansion Interface

3.6.4 LED indicators

The LED indicators of the module are divided into two parts: the backplane status indicator and the output status indicator.

3.6.5 The operating status of the backplane indication

system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 27 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright

3.6.6 Output status indication

The digital output ports use green LEDs to indicate the status of the corresponding channels. A bright light indicates that the output port logic status is "1", and a dark light indicates that the output port logic status is "0".

3.6.7 Definition of terminal blocks


ES2041 Terminal Definition

Terminal Serial Number	notation	note	clarification
the left side	out		
1	.0	CH0	Digital Output Signal
2	.0	Internal parallel connection	
3	L	External power supply 24V+	
4	L	Internal parallel connection	
5	.1	CH1	
6	.1	Internal parallel connection	
7	L	External power supply 24V+	
8	L	Internal parallel connection	
9	.2	CH2	
10	.2	Internal parallel connection	
11	L	External power supply 24V+	
12	L	Internal parallel connection	
13	.3	CH3	
14	.3	Internal parallel connection	
15	L	External power supply 24V+	
16	L	Internal parallel connection	
17	L	External power supply 24V+	
18	M	External power supply 24V-	

ES2042 Terminal Definition

Terminal Serial Number	notation	note	clarification
the left side	out		
1	.0	CH0	Digital Output Signal
2	.0	Internal parallel connection	
3	M	External power supply 24V- Internal parallel connection	
4	M		
5	.1	CH1	
6	.1	Internal parallel connection	
7	M	External power supply 24V- Internal parallel connection	
8	.M		
9	.2	CH2	
10	.2	Internal parallel connection	
11	M	External power supply 24V- Internal parallel connection	
12	M		
13	.3	CH3	
14	.3	Internal parallel connection	
15	M	External power supply 24V- Internal parallel connection	
16	M		
17	L	External power supply 24V+	
18	M	External power supply 24V-	

3.5.8 Wiring diagram

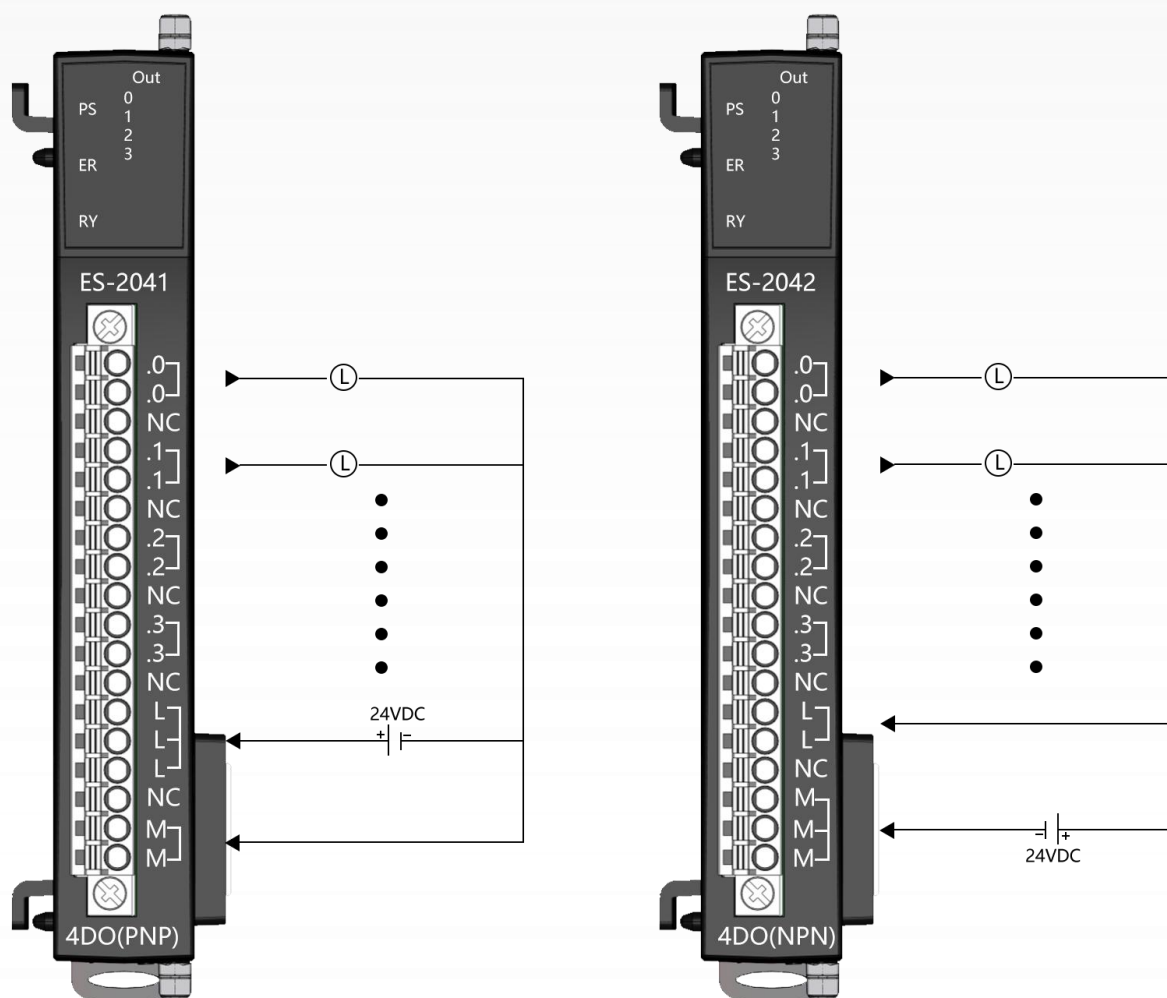

High-level output wiring method (PNP)

Low-level output wiring method (NPN)

3.5.9 Process data definitions

output data								
BIT No					BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0					.3	.2	.1	.0

Data Description: DQ (0-F): If the output data of the corresponding channel is "1", then this position will output; if the output data of the corresponding channel is "0", then this position will not output.

3.5.10 Configuration parameter definitions

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0 (DO Error_ Mode bits 0-7)	DO Error_ Mode For .7	DO Error_ Mode For .6	DO Error_ Mode For .5	DO Error_ Mode For .4	DO Error_ Mode For .3	DO Error_ Mode For .2	DO Error_ Mode For .1	DO Error_ Mode For .0
BYTE 1 (DO Error_ Value bits 0-7)	DO Error Value For .7	DO Error Value For .6	DO Error Value For .5	DO Error Value For .4	DO Error Value For .3	DO Error Value For .2	DO Error Value For .1	DO Error Value For .0

Data Description:

Parameter name		unit (of meas ure)	specifica tion	Input Range	clarification
Chinese writing	English (language)				
Failure mode enable	DO Error_Mode bits	-	decimal system	0-255 (Default: 0)	Fail-safe state value enable for DQ0.x port, the binary bit of this parameter corresponds to DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). When the module enters the fail-safe state, if the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the DQ0.x port (Bit0 corresponds to DQ-0.0 and so on). If the bit corresponding to "Error Mode" is "1", the value of the bit corresponding to "Error Value[7..0]" is output to the corresponding DQ0.x port.
Fault value Safety status value	DO Error_Value bits	-	decimal system	0-255 (Default: 0)	If the binary bit corresponding to the "Error Mode [7..0]" parameter is set to enable, the value of this parameter is output to the DQ port when the system enters the fail-safe state.

3.8 ES-3043A (4-channel Analog Input Module)


3.8.1 Module Overview

- ◆The module supports 4-channel analog signal acquisition. The ES-3043A is for current signal/voltage signal acquisition.
- ◆The ES-3043A module can be configured to acquire 0-20mA/4-20mA current signals or 0-10V voltage signals.
- ◆The module supports 2-wire (non-loop output, requires external power supply) or 4-wire current sensor input.
- ◆The internal bus and field input of the module are magnetically isolated.
- ◆The input channels of the module are connected to on-site active analog signal current output sensors.
- ◆The channels of the module have TVS overvoltage protection.

3.8.2 Module parameters

Hardware parameters		
model number	ES3043A	
Backplane current	20MA	
Extended Interface	2*20Pin Board-to-Board Connector	
connect a wire	I/O wiring: Max.1.5mm²(AWG 16)	
Installation	DN35 rail mounting	
Environmental parameters		
operating temperature	-20℃~75℃	
Environmental humidity	5%~95% non-condensing	
protection class	IP20	
Input parameter		
Number of channels	4CH	
Access type	8 Bytes or 4 Words	
Resolution	16bit	
Input type	0~20mA/4~20mA	0~10V/±10V
Input impedance	≤125Ω	≥10MΩ
Sampling error	±0.3% (Full scale)	
Sampling speed	2ms	
Filtering time	Configurable	

3.8.3 Interface Introduction

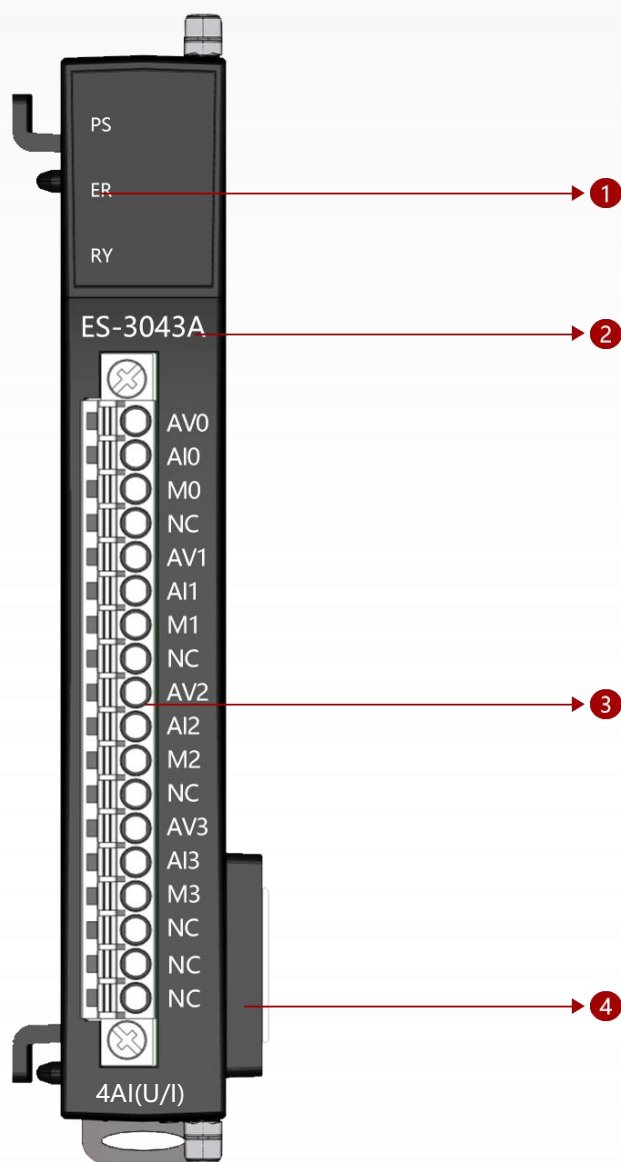

Extended module interface description

- ① Backplane system status indicator light
- ② Module model
- ③ Analog input connection terminals
- ④ Backplane expansion interface

3.8.4 LED indicators

The LED indication of the module is divided into one part: the back panel status indication.

3.6.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 28 System Status Indication

 The green light is on
  Flashing red
  Flashing green
  Not bright

3.8.6 Terminal connection definition

Terminal number	ES3043A	
	Symbol	Explanation
1	AV0	Analog signal input CH0
2	AI0	
3	M0	
4	NC	Empty
5	AV1	Analog signal input CH1
6	AI1	
7	M1	
8	NC	Empty
9	AV2	Analog signal input CH2
10	AI2	
11	M2	
12	NC	Empty
13	AV3	Analog signal input CH3
14	AI3	
15	M3	
16	NC	Empty
17	NC	
18	NC	

3.8.7 Wiring diagram

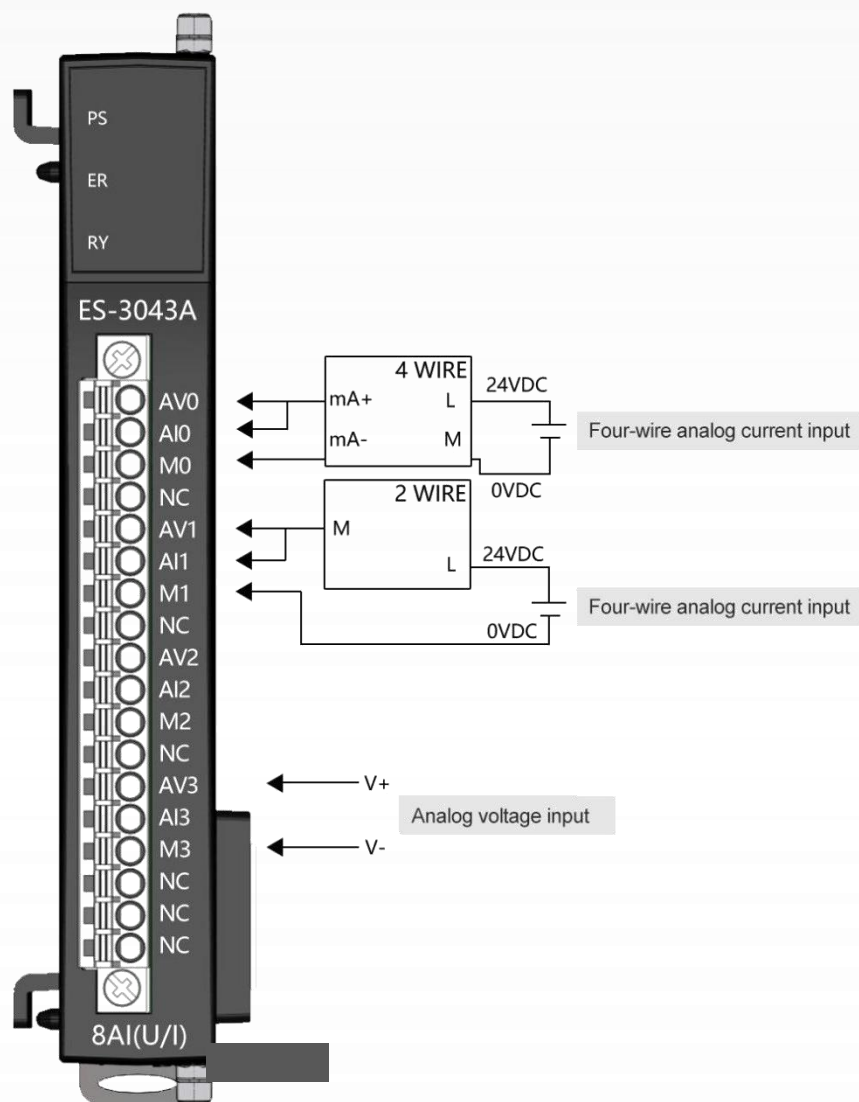


Method for connecting analog current/voltage input

3.8.8 4~20mA Definition and Line Chart

Current measurement range value			
System		Current measurement range	
Decimal	Hexadecimal	4mA~20mA	
32767	7FFF		Overflow
32767	7FFF	20mA	Rated range
0	0	4mA	
-1	FFFF		Underflow
-1024	FFFF_FC00	3.5mA	Overflow
-27648	FFFF_8001		Rated range

4-20mA Current line graph

Numerical value

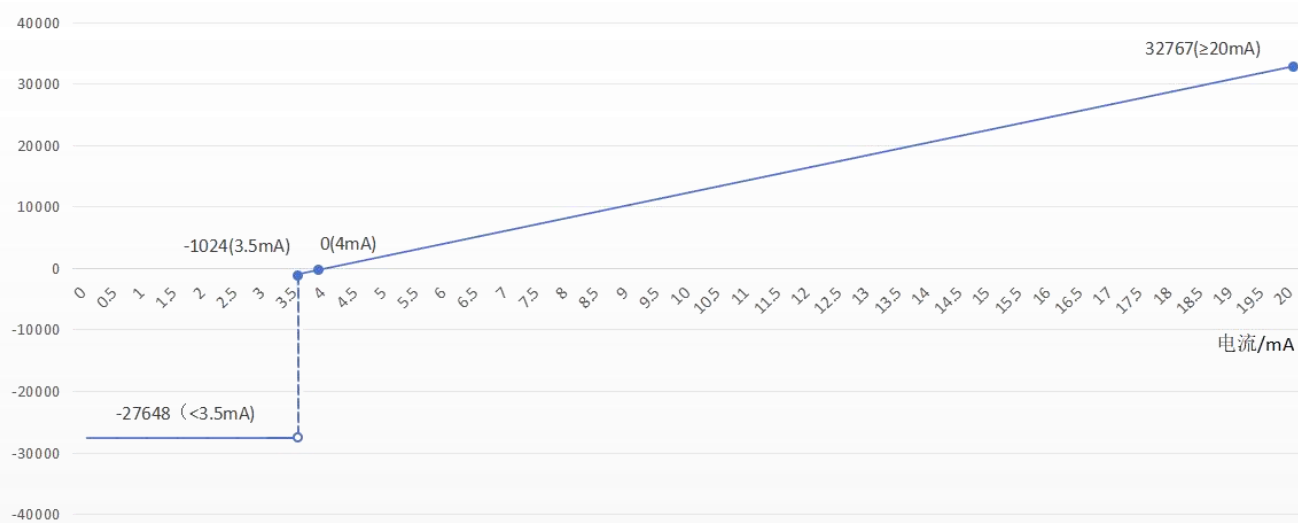

3.8.9 Process data definition

Analog Input Data (CH0-3): The analog signal input value of the corresponding channel.

Input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Analog Input Data (CH0)							
BYTE 1								
BYTE 2	Analog Input Data (CH1)							
BYTE 3								
BYTE 4	Analog Input Data (CH2)							
BYTE 5								
BYTE 6	Analog Input Data (CH3)							
BYTE 7								

3.8.10 Configuration parameter definition

Input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Measuring_Range For CH0							
BYTE 1	Offset For CH0							
BYTE 2								
BYTE 3	Gain For CH0							
BYTE 4								
BYTE 5	Notch_Filter For CH0							
BYTE 6	AverageNum For CH0							
BYTE 7	Full_value For CH0							
BYTE 8								
BYTE 9	Zero_valueFor CH0							
BYTE 10								
BYTE 11	Measuring_Range For CH1							
BYTE 12	Offset For CH1							
BYTE 13								
BYTE 14	Gain For CH1							
BYTE 15								
BYTE 16	Notch_Filter For CH1							
BYTE 17	AverageNum For CH1							
BYTE 18	Full_value For CH1							
BYTE 19								
BYTE 20	Zero_valueFor CH1							
BYTE 21								
.....								

Data description: The configuration parameters of channels 1-3 are the same as those of channel 0.

Parameter Name		Unit	Format	Input Range	Explanation
Chinese	English				
Measurement range of channel 0	Measuring_Range For CH1	-	Symbol	Disable 0-10V (Default) 4-20mA 0-20mA	Select the corresponding range of analog input. "Disable" indicates that the sampling channel is turned off.
Offset of sampling value of channel 0	Offset For CH1	-	Decimal	-32768..32767 (Default: 0)	These two parameters are mainly used for calibrating the analog front-end. $V_i = V_r * \text{Gain} / 1000 + \text{Offset}$; (V_i represents the read data, V_r is the actual input data) Filter out 50Hz or 60Hz power frequency interference noise
Gain of sampling value of channel 0	Gain For CH1	-	system	.65336 (Default: 1000)	
Frequency filter of channel 0	Notch_Filter For CH1	-	Symbol	Disable (Default) 50Hz 60Hz	The module adopts the average value algorithm. Adjusting this parameter can adjust the depth of the average value, improving the sampling accuracy. On the contrary, it will reduce the response time.
Number of times of averaging for sampling of channel 0	AverageNum For CH1	-	Symbol	×0 (Default) ×4 ×8 ×16 ×32	The engineering value of the maximum range
Engineering value of full scale of channel 0	Full_value For CH1	-	Decimal	-32768..32767 (Default: 32767)	The engineering value of the minimum range
Engineering value of zero scale of channel 0	Zero_valueF or CH1	-	system	-32768..32767 (Default: 0)	Select the corresponding range of analog input. "Disable" indicates that the sampling channel is turned off.

3.9 ES-3081A/ES-3082A (8-channel analog input module)


3.7.1 Module overview

- ◆ The module supports 8-channel analog signal acquisition, ES-3081A is current signal acquisition and ES-3082A is voltage signal acquisition.
- ◆ ES-3081A module can be configured for 0~20mA/4~20mA current signal acquisition.
- ◆ ES-3082A module can be configured for 0~10V/±10V voltage signal acquisition.
- ◆ The module supports 2-wire (non-loop output, external power supply required) or 4-wire current sensor input.
- ◆ The input channel of the module is connected to an active analog signal current output sensor in the field.
- ◆ The module channels are equipped with TVS over-voltage protection.

3.9.2 Module parameters

Hardware parameters		
model number	ES3081A	ES3082A
Backplane current	20MA	
Extended Interface	2*20Pin Board-to-Board Connector	
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)	
Installation	DN35 rail mounting	
Environmental parameters		
operating temperature	-40~85℃	
Environmental humidity	5%-95% non-condensing	
protection class	IP20	
Input parameter		
channel number	8CH	
Type of access	16 Bytes or 8 words	
resolution (of a photo)	16-bit	
Input Type	0~20mA/4~20mA	0~10V/±10V
Input Impedance	≤125Ω	≥10MΩ
sampling error	±0.3% (full scale)	
sampling speed	2ms	
filtering time	configurable	
line break protection	Maximum value of output (65535) when 4~20mA is selected for type	

3.9.3 Introduction to interfaces

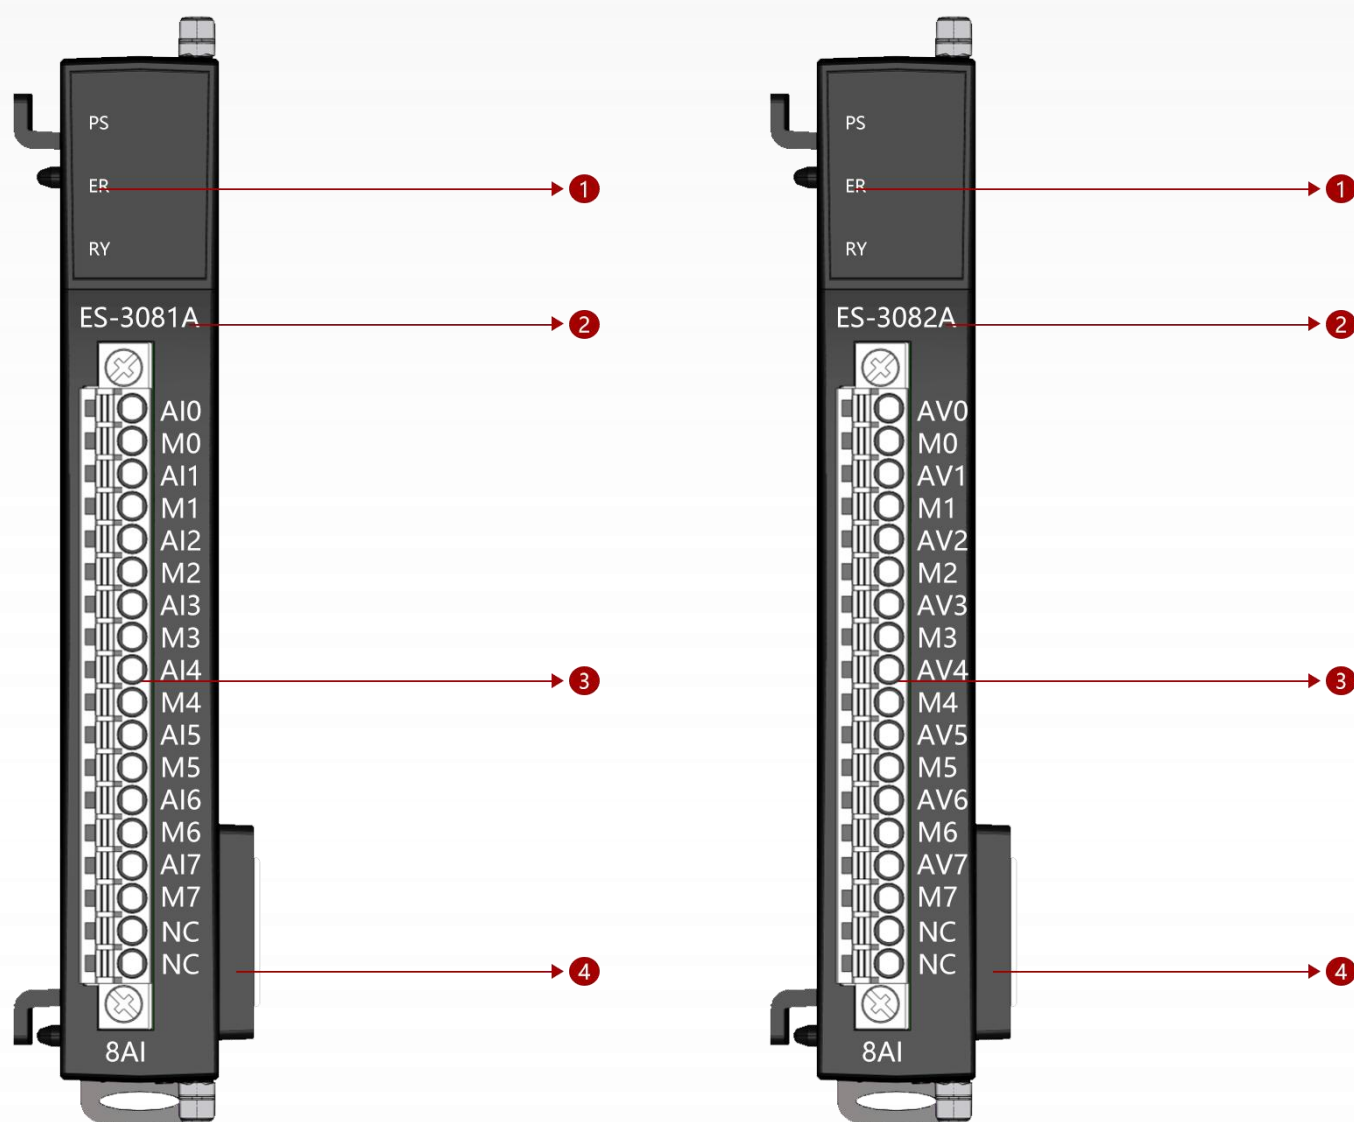

Expansion Module Interface Description

- ① Backplane system status indicator
- ② Module Model
- ③ Analog input terminal
- ④ Backplane expansion interface

3.9.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.9.5 The operating status of the backplane indication

system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 28 System Status Indication

 The green light is on
  Flashing red
  Flashing green
  Not bright

3.9.6 Definition of terminal blocks

Terminal Serial Number	ES3081A	ES3082A	
	notation		clarification
1	AI0	AV0	Analog signal input
2	M0	M0	
3	AI1	AV1	
4	M1	M1	
5	AI2	AV2	
6	M2	M2	
7	AI3	AV3	
8	M3	M3	
9	AI4	AV4	
10	M4	M4	
11	AI5	AV5	
12	M5	M5	
13	AI6	AV6	
14	M6	M6	
15	AI7	AV7	
16	M7	M7	
17	NC	NC	unoccupied
18	NC	NC	unoccupied

3.9.7 Wiring diagram

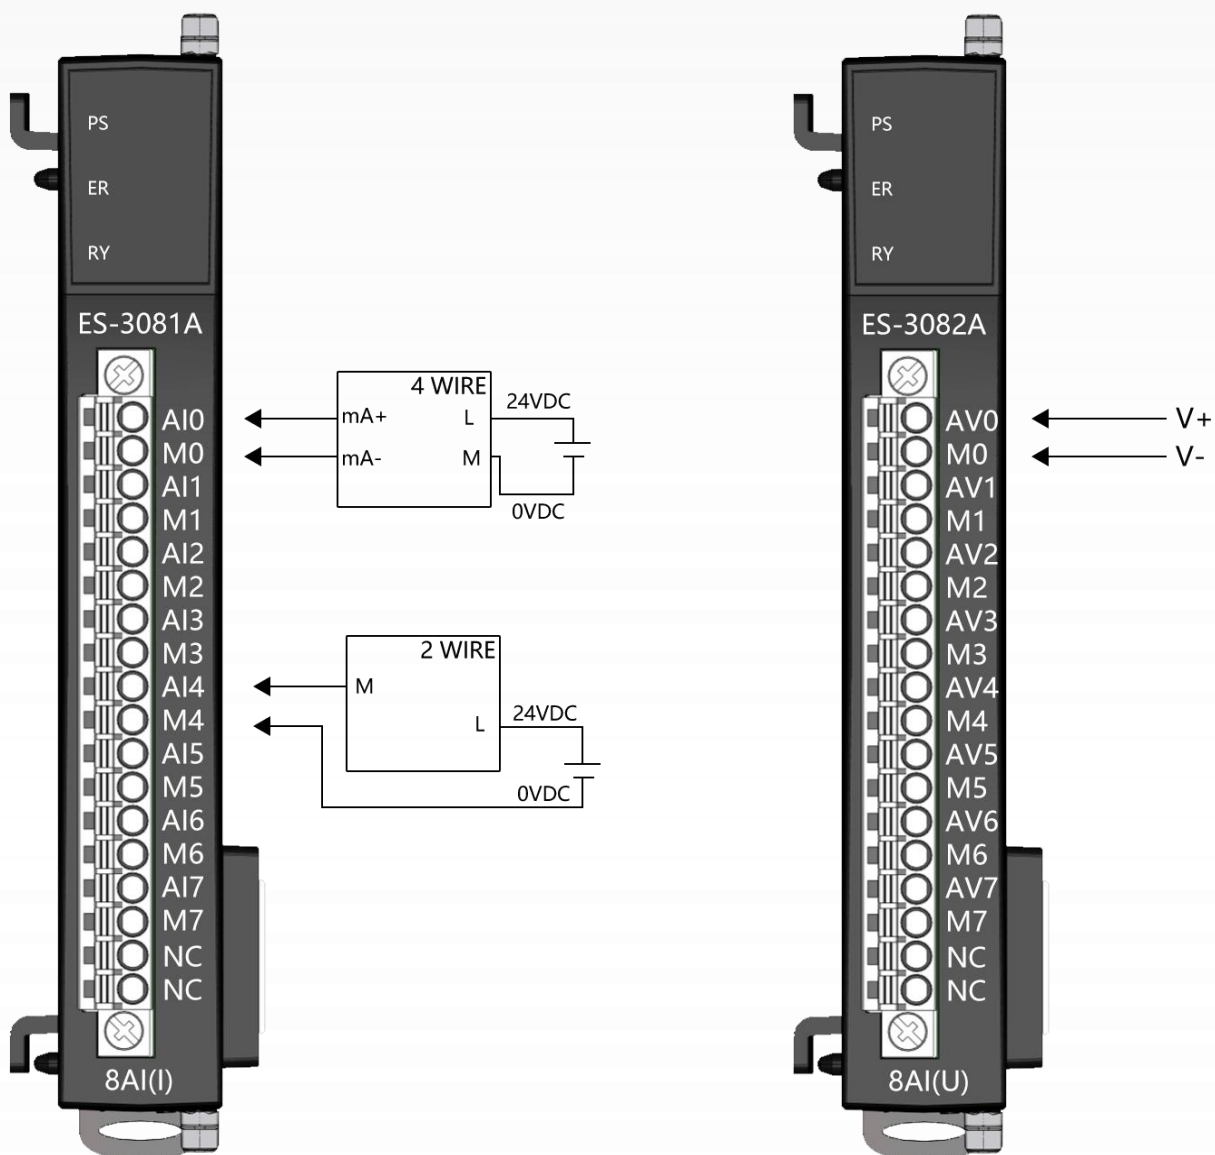


Analog current input wiring method Analog voltage input wiring method

3.9.8 4~20mA Definition and Line Chart

Current measurement range value			
System		Current measurement range	
Decimal	Hexadecimal	4mA~20mA	
32767	7FFF		Overflow
32767	7FFF	20mA	Rated range
0	0	4mA	
-1	FFFF		Underflow
-1024	FFFF_FC00	3.5mA	Overflow
-27648	FFFF_8001		Rated range

4-20mA Current line graph

Numerical value

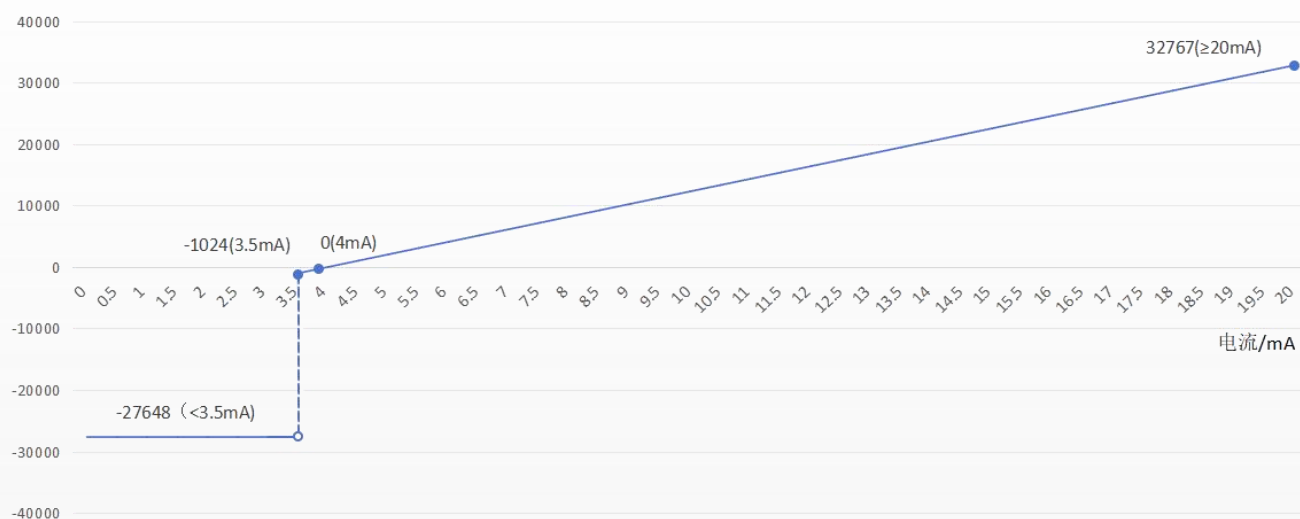

3.9.9 Process data definitions

Analog Input Data (CH0-7): Analog signal input value of the corresponding channel.

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Analog Input Data (CH0)							
BYTE 1								
BYTE 2	Analog Input Data (CH1)							
BYTE 3								
BYTE 4	Analog Input Data (CH2)							
BYTE 5								
BYTE 6	Analog Input Data (CH3)							
BYTE 7								
BYTE 8	Analog Input Data (CH4)							
BYTE 9								
BYTE 10	Analog Input Data (CH5)							
BYTE 11								
BYTE 12	Analog Input Data (CH6)							
BYTE 13								
BYTE 14	Analog Input Data (CH7)							
BYTE 15								

3.9.10 Configuration parameter definitions

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Measuring_Range For CH0							
BYTE 1	Offset For CH0							
BYTE 2								
BYTE 3	Gain For CH0							
BYTE 4								
BYTE 5	Notch_Filter For CH0							
BYTE 6	AverageNum For CH0							
BYTE 7	Full_value For CH0							
BYTE 8								
BYTE 9	Zero_valueFor CH0							
BYTE 10								
BYTE 11	Measuring_Range For CH1							
BYTE 12	Offset For CH1							
BYTE 13								
BYTE 14	Gain For CH1							
BYTE 15								
BYTE 16	Notch_Filter For CH1							
BYTE 17	AverageNum For CH1							
BYTE 18	Full_value For CH1							
BYTE 19								
BYTE 20	Zero_valueFor CH1							
BYTE 21								
.....								

Data Note: The configuration parameters for channels 1-7 and channel 0 are the same.

Parameter name		unit (of measu re)	specifi cation	Input Range	clarification
Chinese	English (language)				
Channel 0 Measuring Range	Measuring_R ange For CH1	-	notatio n	4-20mA (default)	Select the corresponding analog input range where Disable means to close the sampling channel.
Sample value offset for channel 0	Offset For CH1	-	decima l system	-32768..32767 (Default: 0)	These two parameters are mainly used to calibrate the analog front-end. $v_i = V_r \times \text{Gain} / 1000 + \text{Offset}$; (V_i reads the data V_r actual input)
Sample value gain for channel 0	Gain For CH1	-	decima l system	0. .65336 (Default: 1000)	
Frequency filter for channel 0	Notch_Filter For CH1	-	notatio n	Disable (default) 50Hz 60Hz	Filtering of 50 Hz or 60 Hz industrial frequency noise.
Number of samples averaged for channel 0	AverageNum For CH1	-	notatio n	×0 (default) ×4 ×8 ×16 ×32	The averaging algorithm is used within the module, and adjusting this parameter adjusts the averaging depth and improves the sampling accuracy, and conversely decreases the response time.
Full scale engineering value for channel 0	Full_value For CH1	-	decima l system	-32768..32767 (Default: 32767)	Engineering values for maximum range
Zero range engineering value for channel 0	Zero_valueFo r CH1	-	decima l system	-32768..32767 (Default: 0)	Engineering values for minimum range

3.10 ES-3047A (4-channel PT100 temperature input module)


3.10.1 Module overview

- ◆ The module supports 4-channel PT100 temperature signal acquisition, ES-3047A is PT100 signal acquisition.
- ◆ ES-3047A module can be configured for PT100,CU50 signal acquisition.
- ◆ The module supports 4-wire PT100 sensor input.
- ◆ The internal bus and field inputs of the module are magnetically isolated.
- ◆ The module channels are equipped with TVS over-voltage protection.

3.10.2 Module parameters

Hardware parameters	
model number	ES3047A
Backplane Current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	-40~85℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
Input parameter	
channel number	4CH
Type of access	16 Bytes or 8 words
resolution (of a photo)	0.1℃/digit
Input Type	PT100,CU50
overpressure protection	be in favor of
sampling error	±1℃
sampling speed	2ms
filtering time	configurable

3.10.3 Introduction to interfaces

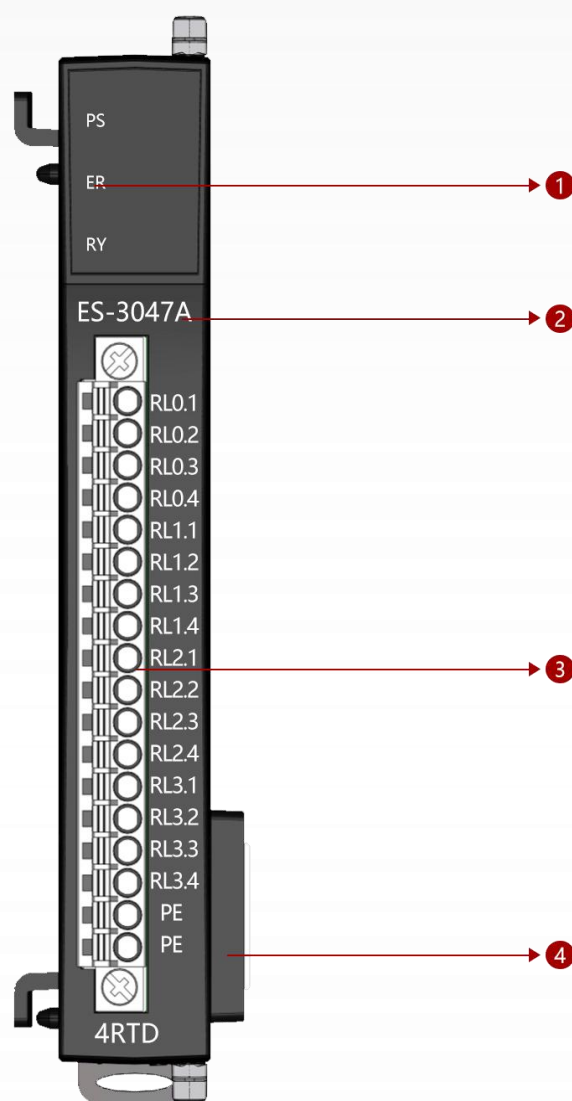

Expansion Module Interface Description

- ① Backplane system status indicator
- ② Module Model
- ③ Analog input terminal
- ④ Backplane expansion interface

3.10.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.10.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 29 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright

3.10.6 Definition of terminal blocks

Terminal Serial Number	ES3047A	
	notation	clarification
1	RL0.1	Temperature signal input CH0
2	RL0.2	
3	RL0.3	
4	RL0.4	
5	RL1.1	Temperature signal input CH1
6	RL1.2	
7	RL1.3	
8	RL1.4	
9	RL2.1	Temperature signal input CH2
10	RL2.2	
11	RL2.3	
12	RL2.4	
13	RL3.1	Temperature signal input CH3
14	RL3.2	
15	RL3.3	
16	RL3.4	
17	PE	grounding
18	PE	grounding

3.10.7 Wiring diagram

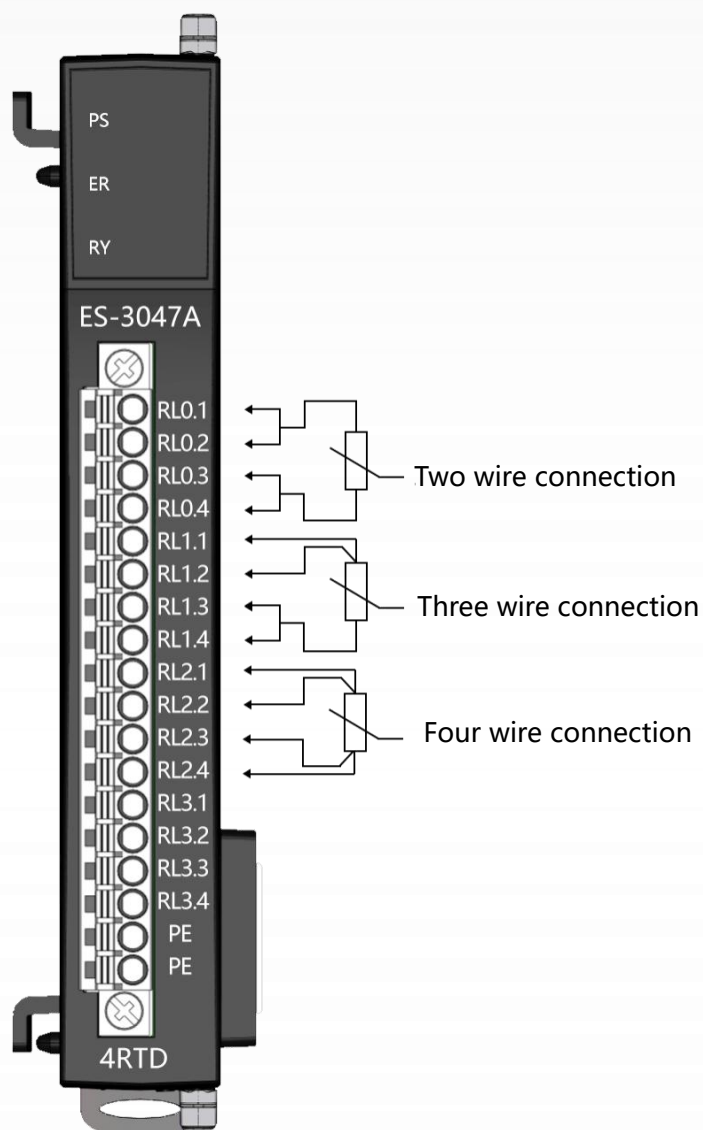

PT100 2-wire, 3-wire, 4-wire wiring diagrams

3.10.8 Process data definitions

Analog Input Data (CH0-3): Analog signal input value of the corresponding channel.

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Analog Input Data (CH0)							
BYTE 1								
BYTE 2	Analog Input Data (CH1)							
BYTE 3								
BYTE 4	Analog Input Data (CH2)							
BYTE 5								
BYTE 6	Analog Input Data (CH3)							
BYTE 7								

3.10.9 Configuration parameter definitions

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	RTD_Sensor_Type For CH0							
BYTE 1	AverageNum For CH0							
BYTE 2	Full_value For CH0							
BYTE 3								
BYTE 4	Zero_valueFor CH0							
BYTE 5								
BYTE 6	RTD_Sensor_Type For CH1							
BYTE 7	AverageNum For CH1							
BYTE 8	Full_value For CH1							
BYTE 9								
BYTE 10	Zero_valueFor CH1							
BYTE 11								
.....								

Data description: Configuration parameters for channels 1-3 and channel 0

Parameter name		unit (of meas ure)	specif icatio n	Input Range	clarification
Chinese	English (language)				
Channel 0 Measuring range	RTD_Sensor_ Type For CH1	-	notati on	PT100 (default) CU50	Select the corresponding analog input range
Number of samples averaged for channel 0	AverageNu m For CH1	-	notati on	×× 0 (default) ×4 ×8 ×16 ×32	The averaging algorithm is used within the module, and adjusting this parameter adjusts the averaging depth and improves the sampling accuracy, and conversely decreases the response time.
Full scale engineerin g value for channel 0	Full_value For CH1	-	decim al system	-32768..32767 (Default: 32767)	Engineering values for maximum range
Zero range engineerin g value for channel 0	Zero_valueF or CH1	-	decim al system	-32768..32767 (Default: 0)	Engineering values for minimum range

3.11 ES-3087A (8-channel RTD input module)


3.11.1 Module overview

- ◆ The module supports 8-channel RTD (PT100, Cu50) temperature acquisition.
- ◆ Module can access 2-wire or 3-wire PT100 temperature sensors
- ◆ Module with 8 input channel LED indicators.
- ◆ The internal bus and field inputs of the module are magnetically isolated.

3.11.2 Module parameters

Hardware parameters	
model number	ES3087A
Backplane current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	0~ +55°C
Environmental humidity	5%-95% non-condensing
protection class	IP20
output parameter	
channel number	8CH (2-wire or 3-wire)
Type of access	16 Bytes or 8 words
Input Type	PT100,Cu50
temperature range	-200°C to +850°C (PT sensor), -60°C to +250°C (Ni sensor)
data output	0.1°C per channel bit
sampling error	Less than ±0.3% (full scale)
sampling speed	2ms
filtering time	configurable

3.11.3 Introduction to interfaces

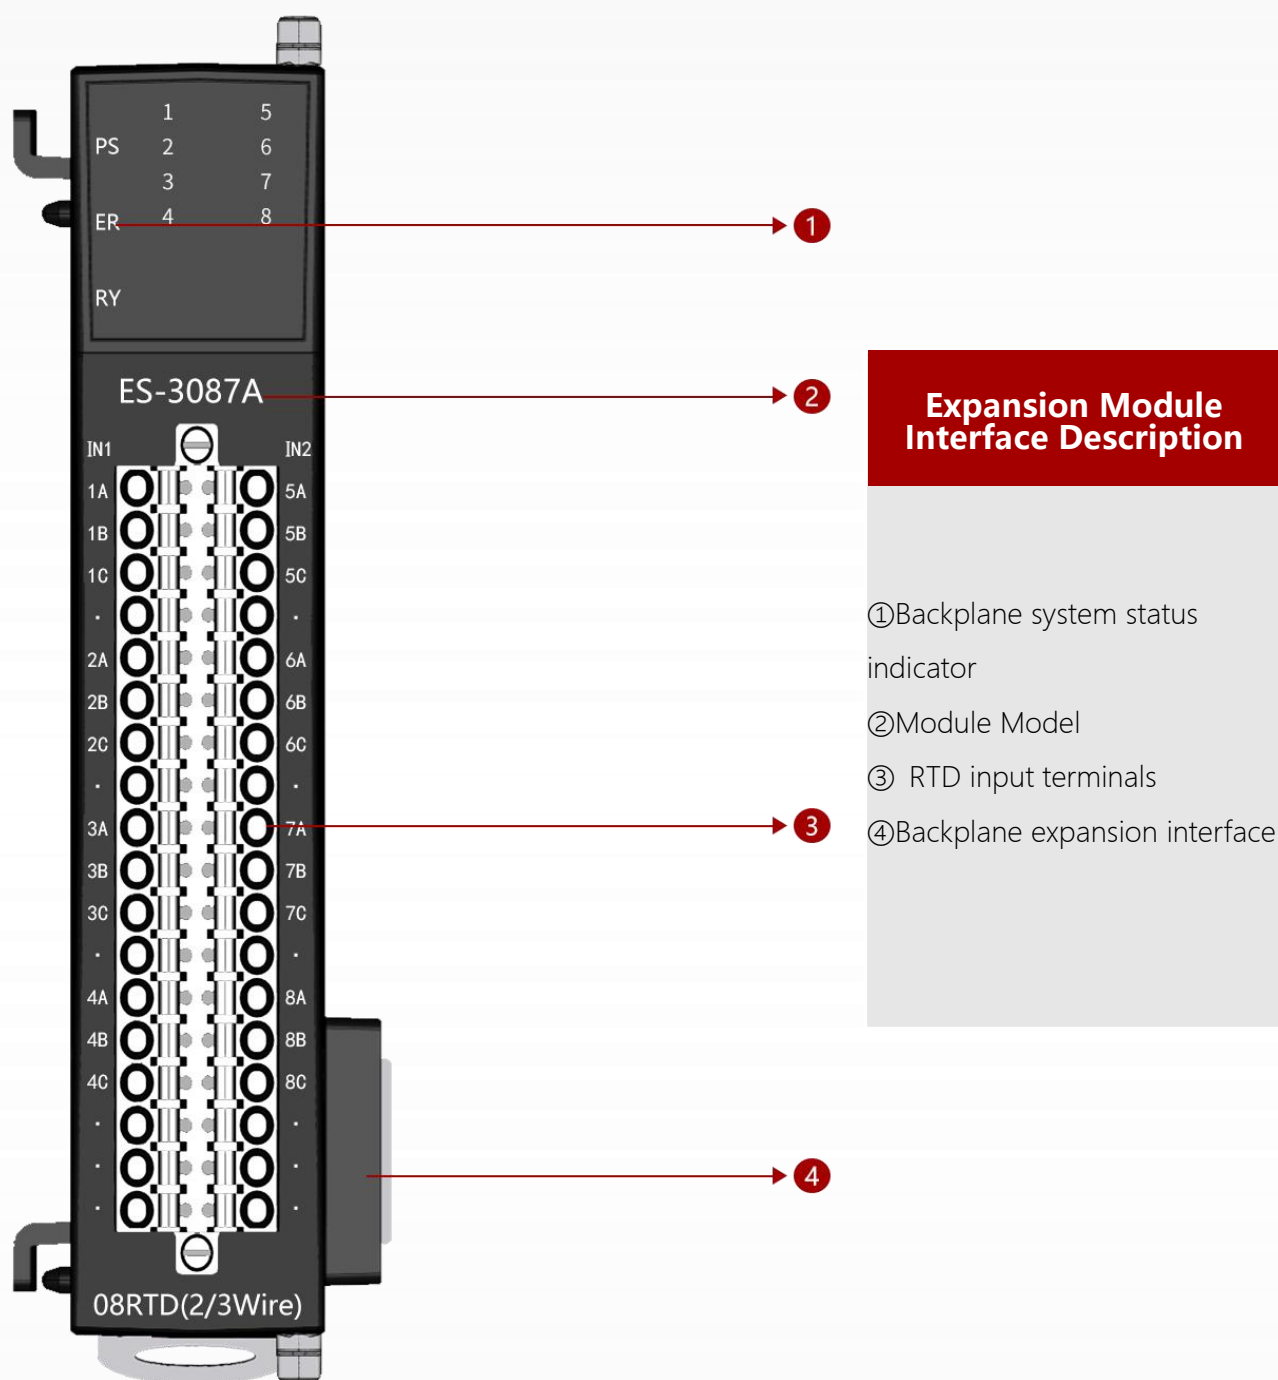

3.11.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.11.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 30 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright

3.11.6 Definition of terminal blocks

Terminal Serial Number	notation	clarification		Terminal Serial Number	notation
the left side	Out1			right, the right	Out2
1	1A	Channel 1	Channel 5	1	5A
2	1B			2	5B
3	1C			3	5C
4	●	undefined		4	●
5	2A	Channel 2	Channel 6	5	6A
6	2B			6	6B
7	2C			7	6C
8	●	undefined		8	●
9	3A	Channel 3	Channel 7	9	7A
10	3B			10	7B
11	3C			11	7C
12	●	undefined		12	●
13	4A	Channel 4	Channel 8	13	8A
14	4B			14	8B
15	4C			15	8C
16	●	undefined		16	●
17	●			17	●
18	●			18	●

3.11.7 Wiring diagram

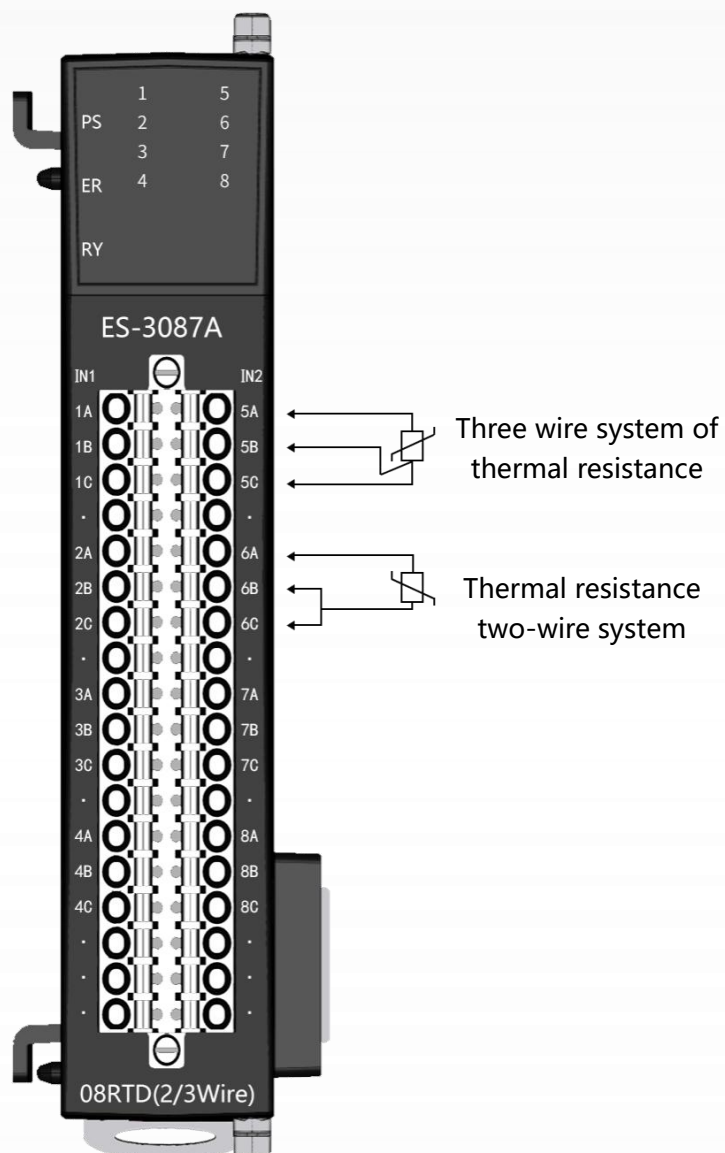

RTD Input Wiring Method

3.11.8 Process data definitions

Analog Input Data (CH1-8): Analog signal input value of the corresponding channel.

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Analog Input Data (CH1)							
BYTE 1								
BYTE 2	Analog Input Data (CH2)							
BYTE 3								
BYTE 4	Analog Input Data (CH3)							
BYTE 5								
BYTE 6	Analog Input Data (CH4)							
BYTE 7								
BYTE 8	Analog Input Data (CH5)							
BYTE 9								
BYTE 10	Analog Input Data (CH6)							
BYTE 11								
BYTE 12	Analog Input Data (CH7)							
BYTE 13								
BYTE 14	Analog Input Data (CH8)							
BYTE 15								

3.11.9 Configuration parameter definitions

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Measuring_Range For CH1							
BYTE 1	AverageNum For CH1							
BYTE 2	Offset For CH1							
BYTE 3								
BYTE 4	Gain For CH1							
BYTE 5								
BYTE 6	Measuring_Range For CH2							
BYTE 7	AverageNum For CH2							
BYTE 8	Offset For CH2							
BYTE 9								
BYTE 10	Gain For CH2							
BYTE 11								
.....								

Data Note: The configuration parameters for channels 3-7 and channel 0 are identical.

Parameter name		unit (of mea sure)	specific ation	Input Range	clarification
Chinese writing	English (language)				
Channel 1 Measurement Type	Measuring_R ange For CH1	-	notation	PT100 (default) CU50	Select the corresponding temperature sensor
Number of filters for channel 1	AverageNum For CH1	-	notation	x0 x4 x8 x16 x32 (Default: 0)	The averaging algorithm is used within the module, and adjusting this parameter adjusts the averaging depth and improves the sampling accuracy, and conversely decreases the response time.
Bias setting for channel 1	Offset For CH1	-	decimal system	-32768..32767 (default: 0)	These two parameters are mainly used to calibrate the analog front-end. $v_i = V_r * \text{Gain} / 1000 + \text{Offset}$; (V_i reads the data V_r actual input)
Gain setting for channel 1	Gain For CH1	-	decimal system	1..65335 (Default: 1000)	

3.12 ES-3048A (4-channel thermocouple input module)


3.12.1 Module Overview

- ◆ The module supports 4-channel TC thermocouple temperature acquisition.
- ◆ The module can be connected to 2-wire TC temperature sensors.
- ◆ The module has 4 input channels with LED indicators.
- ◆ The internal bus and field input of the module are isolated by magnetic means.
- ◆ The module supports the opening and closing of the internal reference temperature and manual reference temperature.

3.12.2 Module Parameters

Hardware Specifications	
Model number	ES3048A
Backplate current	20MA
Expansion interface	2*20-pin board-to-board connector
Connecting the wires	I/O wiring: Max. 1.5mm ² (AWG 16)
Installation method	DIN35 rail mounting
Environmental parameters	
Working temperature	-20°C~75°C
Environmental humidity	5% to 95% no condensation
Protection level	IP20
Input parameters	
Channel number	4CH (two-wire system)
Access type	8 Bytes or 4 words
Input type	J / K / E / T / S / R / B / N type thermocouples
Data output	Per-channel bit 0.1°C
Sampling error	±0.5°C (full scale)
Sampling speed	500ms per time Configurable
Filtering time	K type: -270 to 1370°C
Measurement range: °C	S type: -50 to 1760°C
	R type: -50 to 1760°C
	B type: 0 to 1820°C
	J type: -210 to 1200°C
	N type: -270 to 1300°C
	E type: -270 to 1000°C
	T type: -270 to 400°C
	16-bit signed integer (Integer)
Data format	4CH (two-wire system)
Output parameters	
Number of channels	4CH (two-wire system)
Output type	Manually set the reference temperature value

3.12.3 Interface Introduction

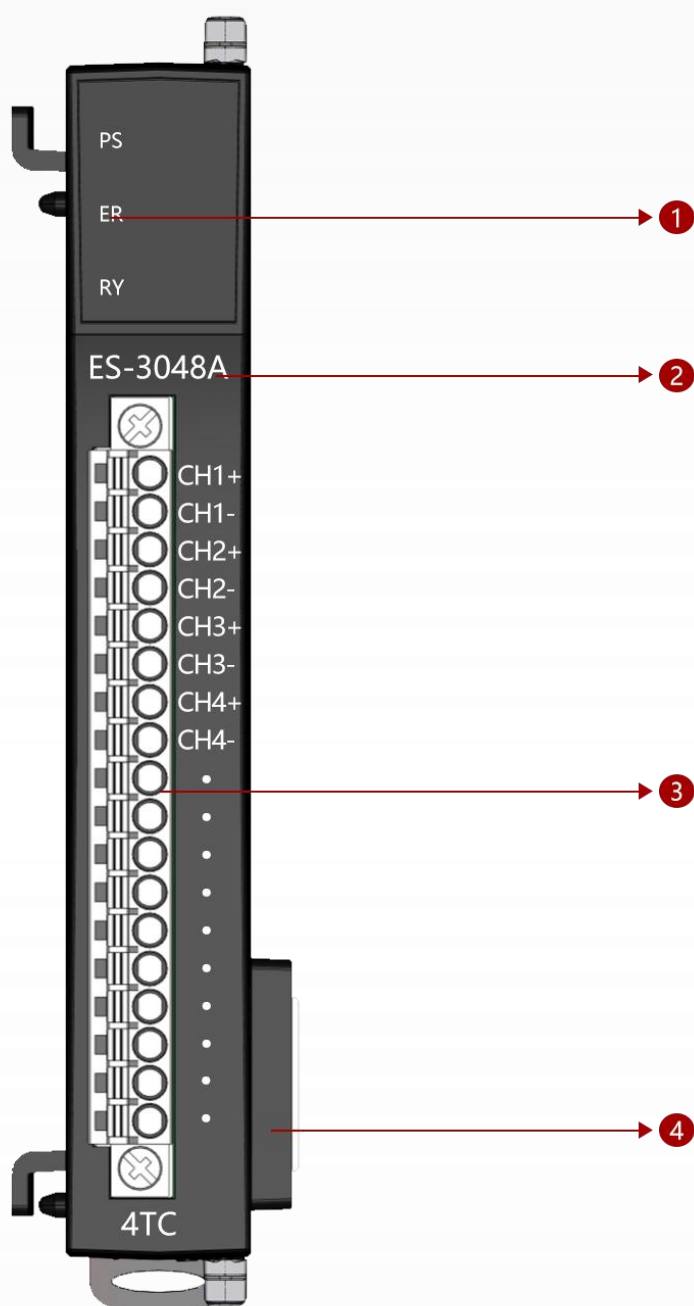

Expansion Module Interface Description

- ① Backplane system status indicator light
- ② Module model
- ③ Thermocouple input terminal
- ④ Backplane expansion interface

3.12.4 LED indicator light

The LED indication of the module is divided into one part: the back panel status indication.

3.12.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 31 System Status Indication

 The green light is on
  Flashing red
  Flashing green
  Not bright

3.12.6 Terminal connection definition

Terminal number	ES3048A	
	Symbol	Explanation
1	CH1+	Thermocouple signal input
2	CH1-	
3	CH2+	
4	CH2-	
5	CH3+	
6	CH3-	
7	CH4+	
8	CH4-	
9	●	NULL
10	●	NULL
11	●	NULL
12	●	NULL
13	●	NULL
14	●	NULL
15	●	NULL
16	●	NULL
17	●	NULL
18	●	NULL

3.12.7 Wiring diagram

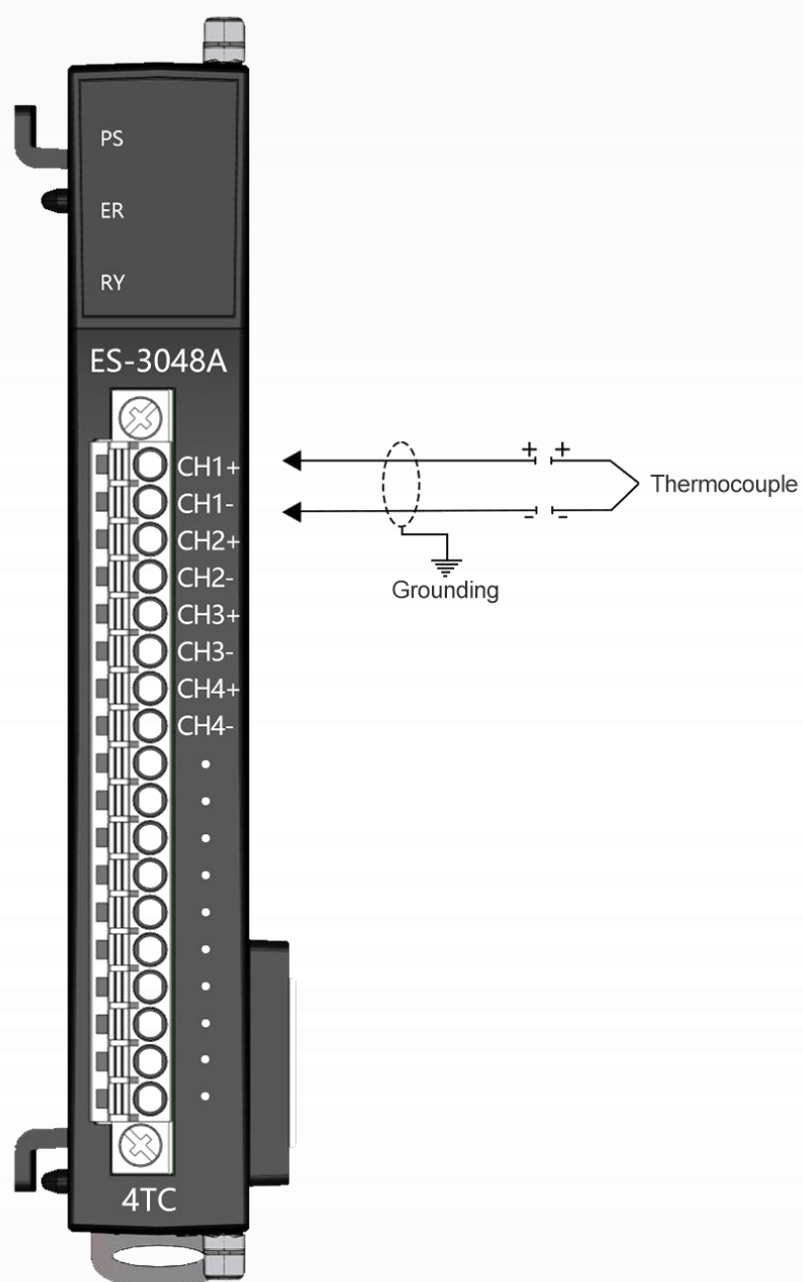

Method for connecting the thermocouple input

3.12.8 Process data definition

Analog Input Data (CH1-4): The values of analog signals input for each corresponding

Input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Analog Input Data (CH1)							
BYTE 1								
BYTE 2	Analog Input Data (CH2)							
BYTE 3								
BYTE 4	Analog Input Data (CH3)							
BYTE 5								
BYTE 6	Analog Input Data (CH4)							
BYTE 7								

channel.

Analog Output Data (CH1-4): When the manual reference is enabled, the provided data represents the reference temperature.

Output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Manual reference temperature Data (CH1)							
BYTE 1								
BYTE 2	Manual reference temperature Data (CH2)							
BYTE 3								
BYTE 4	Manual reference temperature Data (CH3)							
BYTE 5								
BYTE 6	Manual reference temperature Data (CH4)							
BYTE 7								

3.12.9 Configuration parameter definition

Input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BIT 0..3	Measuring_Range For CH1							
BIT 4..7	REF_JUN_STATE For CH1							
BYTE 1	AverageNum For CH1							
BYTE 2	Offset For CH1							
BYTE 3								
BYTE 4	Gain For CH1							
BYTE 5								
BIT 6.0..6.3	Measuring_Range For CH2							
BIT 6.4..6.7	REF_JUN_STATE For CH2							
BYTE 7	AverageNum For CH2							
BYTE 8	Offset For CH2							
BYTE 9								
BYTE 10	Gain For CH2							
BYTE 11								
.....								

Data description: The configuration parameters of channel 3-4 are the same as those of channel 0.

Parameter name		unit (of mea sure)	specifica tion	Input Range	clarification
Chinese writing	English (language)				
Measurement type of Channel 1	Measuring_Ran ge For CH1	-	Symbol	TC_K (Default) TC_K TC_S TC_R TC_B TC_J TC_N TC_E TC_T	Select the corresponding temperature sensor
Internal reference temperature of Channel 1	REF_JUN_STATE For CH1		Symbol	Internal reference temperature enabled Internal reference temperature disabled Manually set temperature (Default: Internal reference temperature enabled)	Select the corresponding reference temperature method
Number of filtering cycles of Channel 1	AverageNum For CH1	-	Symbol	x0 x4 x8 x16 x32 (默认: 0)	The module employs an average value algorithm. Adjusting this parameter allows you to modify the depth of the average value, thereby improving sampling accuracy. On the contrary, it will reduce the response time.
Bias setting of Channel 1	Offset For CH1	-	Decimal system	-32768..32767 (Default: 0)	These two parameters are mainly used for calibrating the analog front-end. $V_i = V_r * \text{Gain} / 1000 + \text{Offset}$; (V_i represents the read-in data, while V_r is the actual input data)
Gain setting for Channel 1	Gain For CH1	-	Decimal system	1..65335 (Default: 1000)	

3.13 ES-3088A (8-channel thermocouple input module)


3.13.1 Module overview

- ◆ The module supports 8-channel TC thermocouple temperature acquisition.
- ◆ Module can access 2-wire TC temperature sensor
- ◆ Module with 8 input channels LED indicators.
- ◆ The internal bus and field inputs of the module are magnetically isolated.

3.13.2 Module parameters

Hardware parameters	
model number	ES3088A
Backplane Current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	0~+55℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
output parameter	
channel number	8CH (2-wire)
Type of access	16 Bytes or 8 words
Input Type	J / K / E / T / S / R / B / N Type Thermocouple
data output	0.1℃ per channel bit
sampling error	Less than ±0.3% (full scale)
sampling speed	2ms
filtering time	configurable
conjecture	Type K -270~1370℃
measure word	S type -50~1760℃
example	R type -50~1760℃
wear by wrapping around (scarf,	B Type 0~1820℃
shawl)	J type -210~1200℃
℃	N Type -270~1300℃
	E type -270~1000℃
	T type -270~400℃
data format	16-bit signed integer (Integer)

3.13.3 Introduction to interfaces

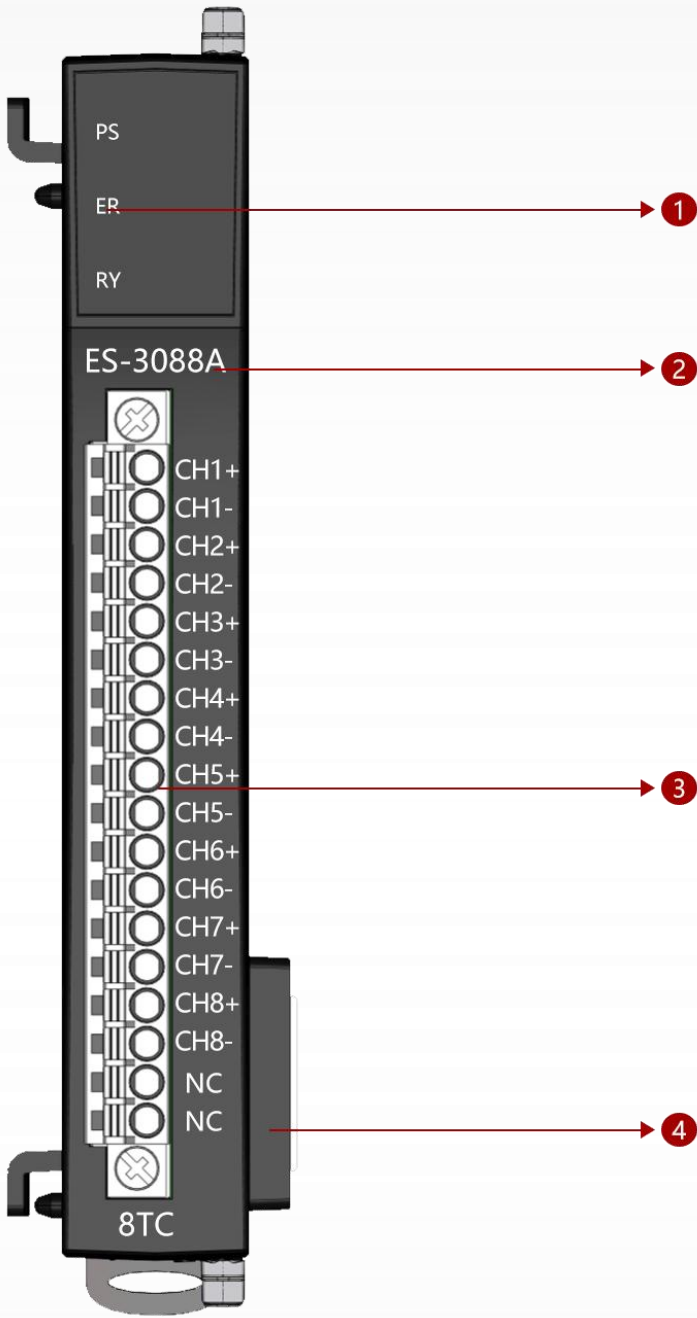

Expansion Module Interface Description

- ① Backplane system status indicator
- ② Module Model
- ③ Thermocouple input terminals
- ④ Backplane expansion interface

3.13.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.13.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 32 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright

3.13.6 Definition of terminal blocks

Terminal Serial Number	ES3088A	
	notation	clarification
1	CH1+	Thermocouple Signal Input
2	CH1-	
3	CH2+	
4	CH2-	
5	CH3+	
6	CH3-	
7	CH4+	
8	CH4-	
9	CH5+	
10	CH5-	
11	CH6+	
12	CH6-	
13	CH7+	
14	CH7-	
15	CH8+	
16	CH8-	
17	NC	unoccupied
18	NC	unoccupied

3.13.7 Wiring diagram

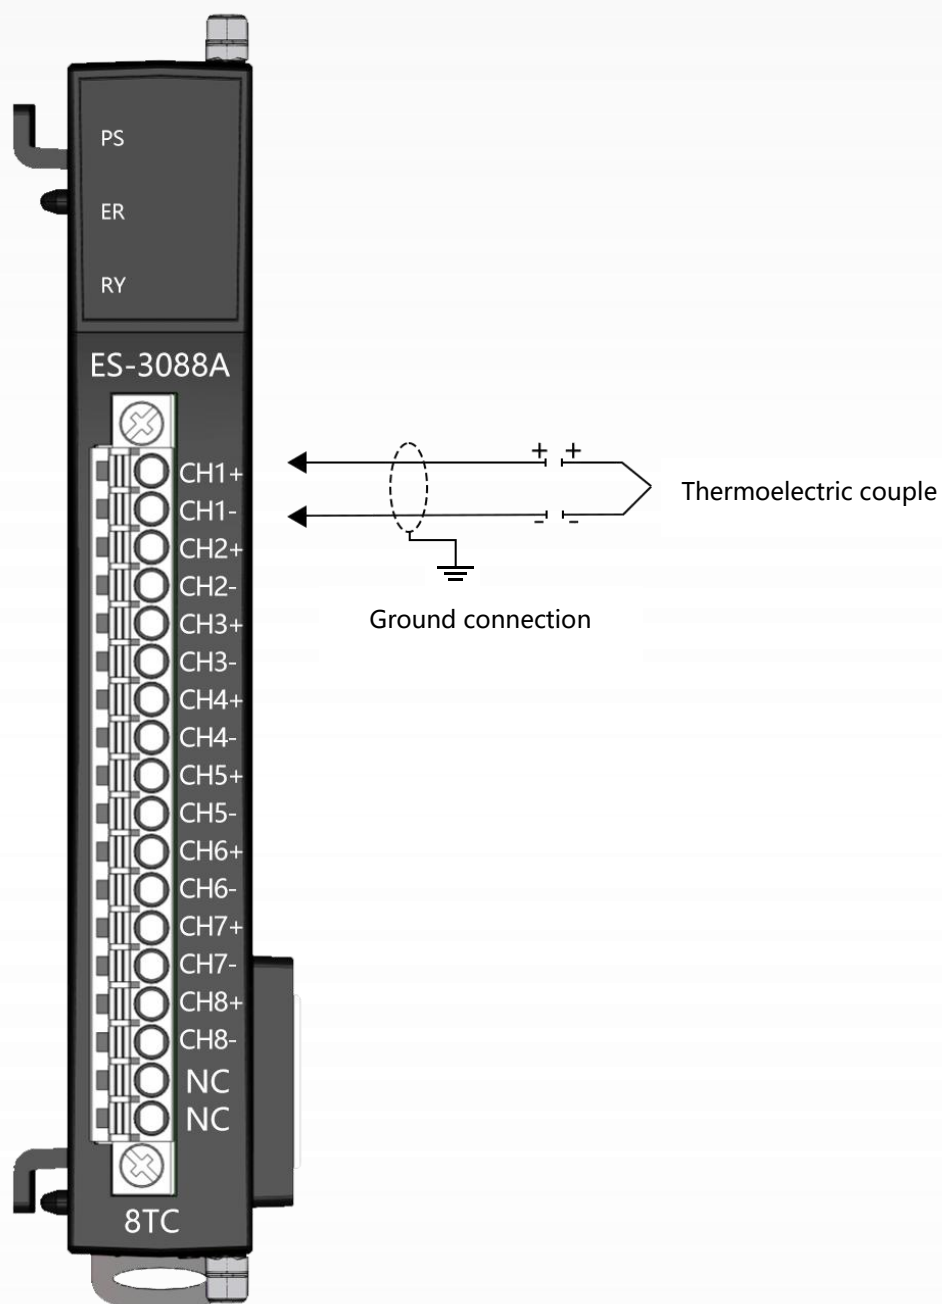

Thermocouple Input Wiring Method

3.13.8 Process data definitions

Analog Input Data (CH1-8): Analog signal input value of the corresponding channel.

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Analog Input Data (CH1)							
BYTE 1								
BYTE 2	Analog Input Data (CH2)							
BYTE 3								
BYTE 4	Analog Input Data (CH3)							
BYTE 5								
BYTE 6	Analog Input Data (CH4)							
BYTE 7								
BYTE 8	Analog Input Data (CH5)							
BYTE 9								
BYTE 10	Analog Input Data (CH6)							
BYTE 11								
BYTE 12	Analog Input Data (CH7)							
BYTE 13								
BYTE 14	Analog Input Data (CH8)							
BYTE 15								

3.13.9 Configuration parameter definitions

input data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Measuring_Range For CH1							
BYTE 1	AverageNum For CH1							
BYTE 2	Offset For CH1							
BYTE 3								
BYTE 4	Gain For CH1							
BYTE 5								
BYTE 6	Measuring_Range For CH2							
BYTE 7	AverageNum For CH2							
BYTE 8	Offset For CH2							
BYTE 9								
BYTE 10	Gain For CH2							
BYTE 11								
.....								

Data Note: The configuration parameters for channels 3-7 and channel 0 are identical.

Parameter name		unit (of mea sure)	specific ation	Input Range	clarification
Chinese writing	English (language)				
Channel 1 Measuremen t Type	Measuring_R ange For CH1	-	notation	TC_K (default) TC_K TC_S TC_R TC_B TC_J TC_N TC_E TC_T	Select the corresponding temperature sensor
Number of filters for channel 1	AverageNum For CH1	-	notation	x0 x4 x8 x16 x32 (Default: 0)	The averaging algorithm is used within the module, and adjusting this parameter adjusts the averaging depth and improves the sampling accuracy, and conversely decreases the response time.
Bias setting for channel 1	Offset For CH1	-	decimal system	-32768..32767 (default: 0)	These two parameters are mainly used to calibrate th e analog front-end. $v_i = V_r * \text{Gain} / 1000 + \text{Offset}$; (V_i reads the data V_r actual input)
Gain setting for channel 1	Gain For CH1	-	decimal system	1..65335 (Default: 1000)	

3.14 ES-4043A (4-channel analog output module)


3.14.1 Module overview

- ◆ The module supports 4-channel analog signal output, ES-4043A is current signal/voltage signal output.
- ◆ ES-4043A module can be configured as 0-20mA current signal output / 0-10V voltage signal output
- ◆ The module supports 2-wire output.
- ◆ The internal bus and field inputs of the module are magnetically isolated.
- ◆ The output channels of the module are connected to current and voltage loads.
- ◆ The module channels are equipped with TVS over-voltage protection.

3.14.2 Module parameters

Hardware parameters	
model number	ES4043A
Backplane Current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	-40~85℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
output parameter	
channel number	8CH
Type of access	16 Bytes or 8 words
resolution (of a photo)	16-bit
Output type	0~20mA/0~10V
sampling speed	Single channel 1MS

3.14.3 Introduction to interfaces

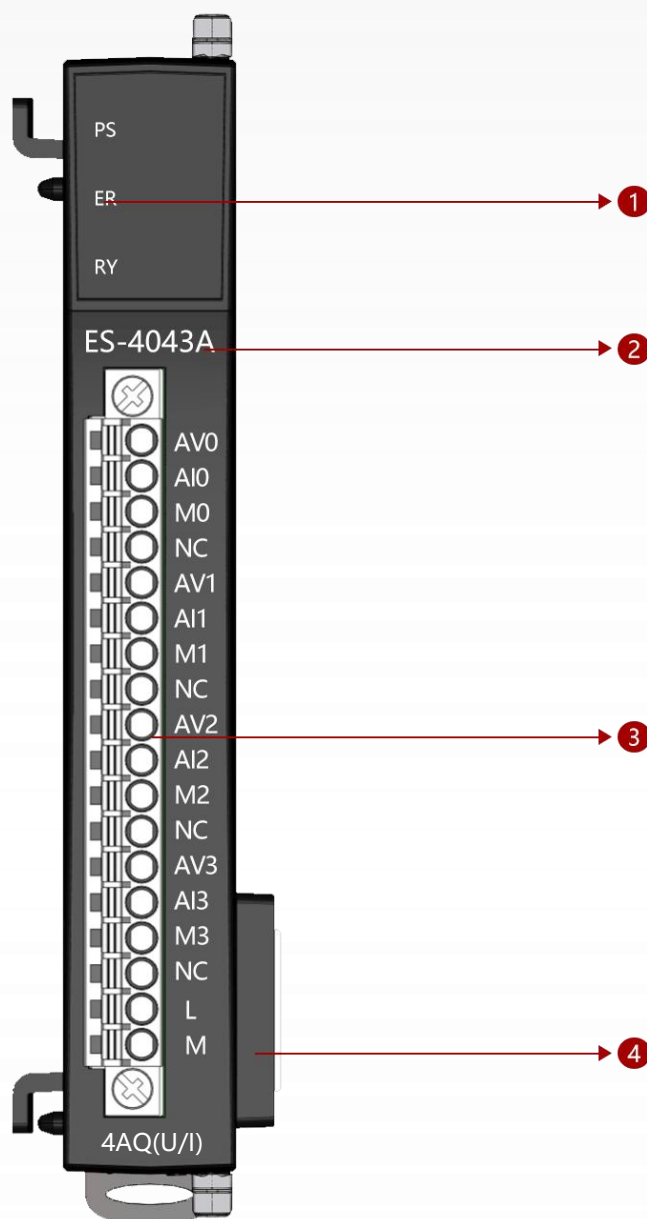

Expansion Module Interface Description

- ① Backplane system status indicator
- ② Module Model
- ③ Analog output terminal
- ④ Backplane expansion interface

3.14.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.14.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 33 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright

3.14.6 Definition of terminal blocks

Terminal Serial Number	ES4081A	
	notation	clarification
1	AV0	Analog signal output CH0
2	AI1	
3	M0	
4	NC	unoccupied
5	AV1	Analog signal output CH1
6	AI1	
7	M1	
8	NC	unoccupied
9	AV2	Analog signal output CH2
10	AI2	
11	M2	
12	NC	unoccupied
13	AV3	Analog signal output CH3
14	AI3	
15	M3	
16	NC	unoccupied
17	L	DC24V
18	M	0V

3.14.7 Wiring diagram

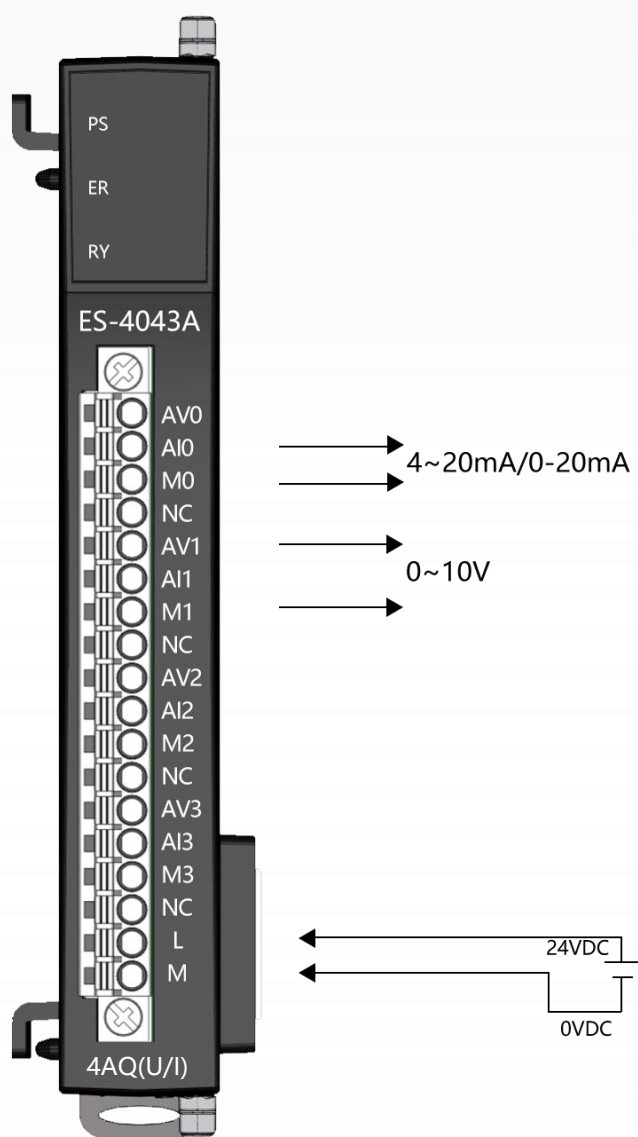

Analog current/voltage output wiring method

3.14.8 Process data definitions

Analog Input Data (CH0-3): Analog signal input value of the corresponding channel

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Analog Output Data (CH0)							
BYTE 1								
BYTE 2	Analog Output Data (CH1)							
BYTE 3								
BYTE 4	Analog Output Data (CH2)							
BYTE 5								
BYTE 6	Analog Output Data (CH3)							
BYTE 7								

3.14.9 Configuration parameter definitions

Transmission data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	OUT_Range For CH0							
BYTE 1	Error_Mode (Param. CH1_Error_Mode) For CH0							
BYTE 2	Replace value For CH0							
BYTE 3								
BYTE 4	Full value For CH0							
BYTE 5								
BYTE 6	Zero value For CH0							
BYTE 7								
BYTE 8	OUT_Range For CH1							
BYTE 9	Error_Mode (Param. CH1_Error_Mode) For CH1							
BYTE 10	Replace value For CH1							
BYTE 11								
BYTE 12	Full value For CH1							
BYTE 13								
BYTE 14	Zero value For CH1							
BYTE 15								
.....								

Data Note: The configuration parameters for channels 1-3 and channel 0 are the same.

Parameter name		unit (of mea sure)	specific ation	Input Range	clarification
Chinese	English (language)				
Channel 0 type selection	OUT_Range	-	notation	Disable 0-10V (default) 4-20mA 0-20mA	Select the corresponding analog output range where Disable means to close the sampling channel.
Channel 0 Safe Mode	Error_Mode (Param. CH1_Error_M ode) For CH1	-	notation	0..2	0: Output to 0 1: Maintain current value 2: Output alternatives
Alternative values for channel 0	Replace value For CH1	-	decimal system	-32768..3276 7	-32768..32767 (Default: 0)
Full scale engineering value for channel 0	Full value For CH1	-	decimal system	-32768..3276 7	-32768..32767 (Default: 32767)
Zero range engineering value for channel 0	Zero value For CH1	-	decimal system	-32768..3276 7	-32768..32767 (Default: 0)

3.15 ES-4081A/ES-4082A (8-channel analog output module)


3.15.1 Module overview

- ◆ The module supports 8-channel analog signal output, ES-4081A is current signal output and ES-4082A is voltage signal output.
- ◆ ES-4081A module can be configured for 0-20mA current signal output. ES-4082A module can be configured for 0-10V voltage signal output.
- ◆ The module supports 2-wire output.
- ◆ The internal bus and field inputs of the module are magnetically isolated.
- ◆ The output channels of the module are connected to current and voltage loads.
- ◆ The module channels are equipped with TVS over-voltage protection.

3.15.2 Module parameters

Hardware parameters		
model number	ES4081A	ES4082A
Backplane Current	20MA	
Extended Interface	2*20Pin Board-to-Board Connector	
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)	
Installation	DN35 rail mounting	
Environmental parameters		
operating temperature	-40~85℃	
Environmental humidity	5%-95% non-condensing	
protection class	IP20	
output parameter		
channel number	8CH	
Type of access	16 Bytes or 8 words	
resolution (of a photo)	16-bit	
Output type	0~20mA	0~10V
sampling speed	Single channel 1MS	

3.15.3 Introduction to interfaces

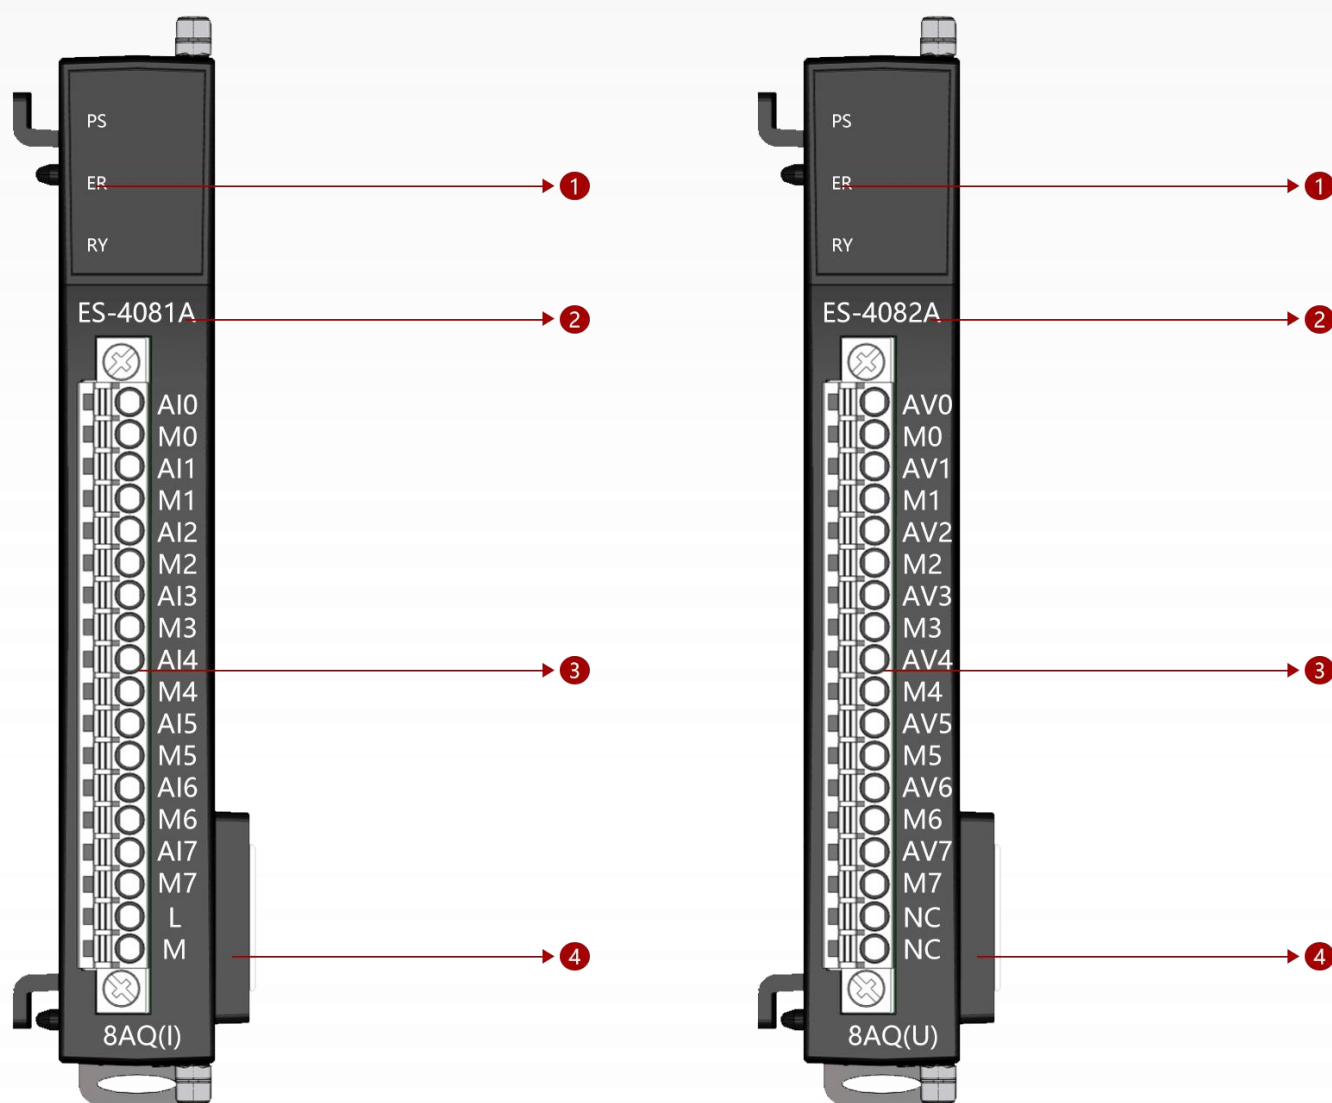

Expansion Module Interface Description

- ① Backplane system status indicator
- ② Module Model
- ③ Analog output terminal
- ④ Backplane expansion interface

3.15.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.15.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 34 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright

3.15.6 Definition of terminal blocks

Terminal Serial Number	ES4081A	ES4082A	
	notation		clarification
1	AI0	AV0	Analog signal output
2	M0	M0	
3	AI1	AV1	
4	M1	M1	
5	AI2	AV2	
6	M2	M2	
7	AI3	AV3	
8	M3	M3	
9	AI4	AV4	
10	M4	M4	
11	AI5	AV5	
12	M5	M5	
13	AI6	AV6	
14	M6	M6	
15	AI7	AV7	
16	M7	M7	
17	L	NC	ES4081A:DC24V,ES4082A:Empty
18	M	NC	ES4081A:DC0V,ES4082A:Empty

3.15.7 Wiring diagram

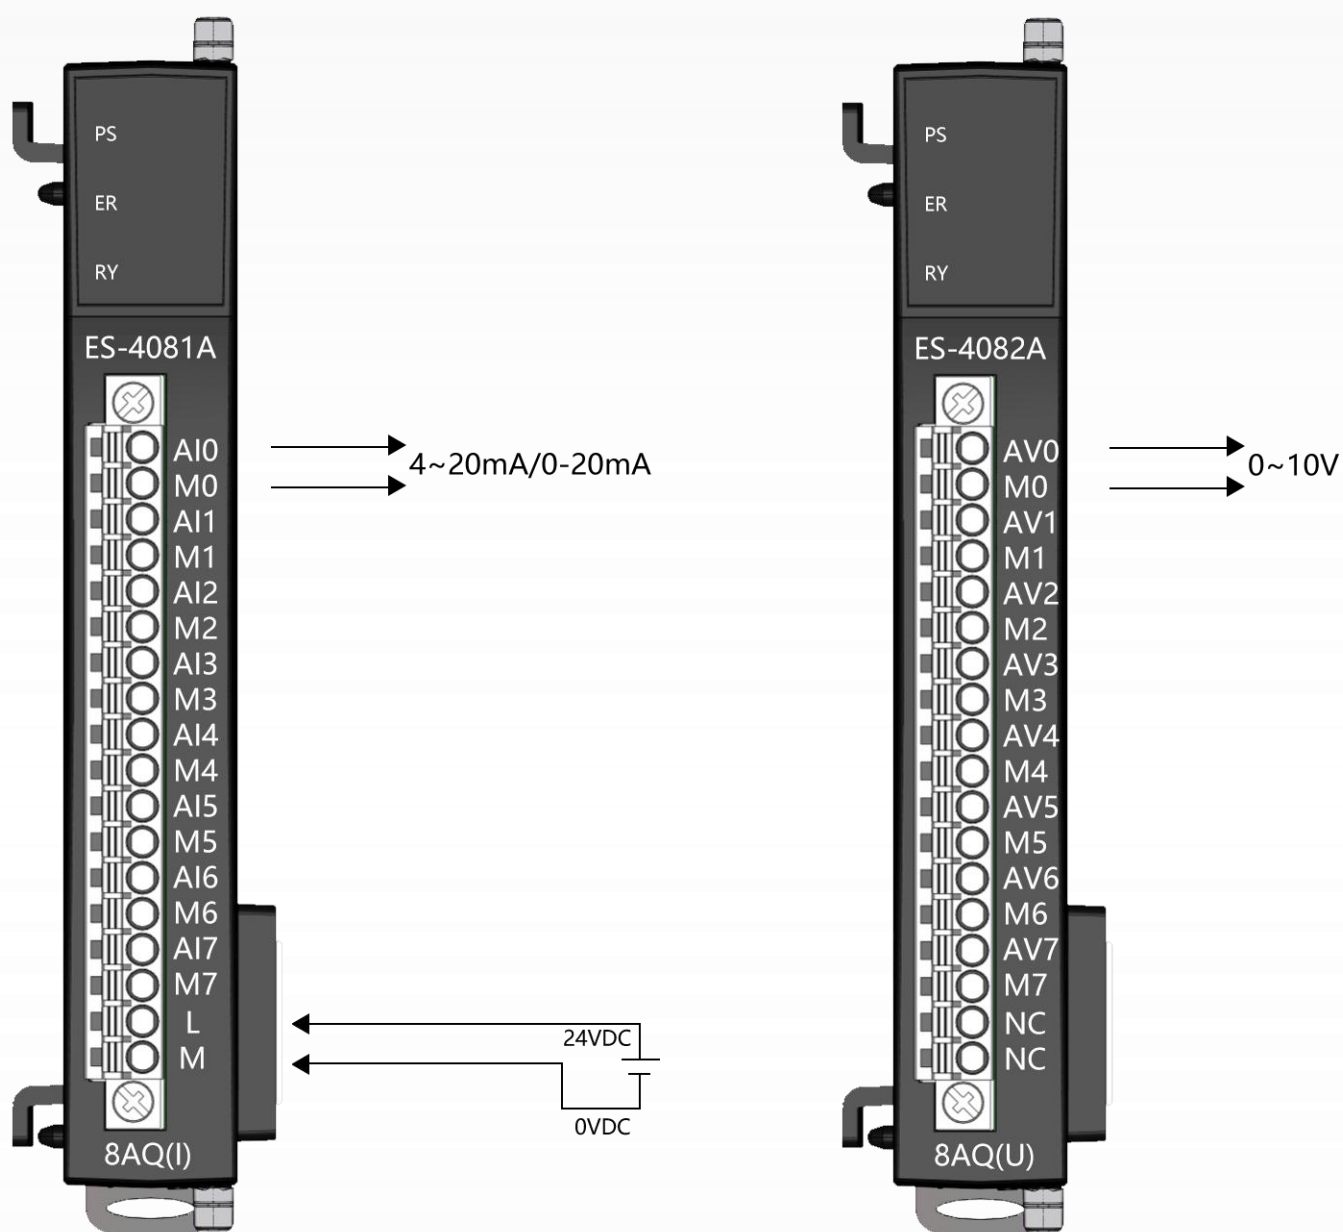

Analog current output wiring method Analog voltage output wiring method

3.15.8 Process Data Definition

Analog Input Data (CH0-7): Analog signal input value of the corresponding channel

output data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Analog Output Data (CH0)							
BYTE 1								
BYTE 2	Analog Output Data (CH1)							
BYTE 3								
BYTE 4	Analog Output Data (CH2)							
BYTE 5								
BYTE 6	Analog Output Data (CH3)							
BYTE 7								
BYTE 8	Analog Output Data (CH4)							
BYTE 9								
BYTE 10	Analog Output Data (CH5)							
BYTE 11								
BYTE 12	Analog Output Data (CH6)							
BYTE 13								
BYTE 14	Analog Output Data (CH7)							
BYTE 15								

3.15.9 Configuration parameter definitions

Transmission data								
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Error_Mode (Param. CH0 CH0_Error_Mode) For CH0							
BYTE 1	Replace value For CH0							
BYTE 2								
BYTE 3	Full value For CH0							
BYTE 4								
BYTE 5	Zero value For CH0							
BYTE 6								
BYTE 7	Error_Mode (Param. CH CH0_Error_Mode) For CH1							
BYTE 8	Replace value For CH1							
BYTE 9								
BYTE 10	Full value For CH1							
BYTE 11								
BYTE 12	Zero value For CH1							
BYTE 13								
.....								

Data Note: The configuration parameters for channels 1-7 and channel 0 are the same.

Parameter name		unit (of mea sure)	specific ation	Input Range	clarification
Chinese writing	English (language)				
Channel 0 Safe Mode	Error_Mode (Param. CH1_Error_M ode) For CH1	-	notation	0..2	0: Output to 0 1: Maintain current value 2: Output alternatives
Alternative values for channel 0	Replace value For CH1	-	decimal system	-32768..3276 7	-32768..32767 (Default: 0)
Full scale engineering value for channel 0	Full value For CH1	-	decimal system	-32768..3276 7	-32768..32767 (Default: 32767)
Zero range engineering value for channel 0	Zero value For CH1	-	decimal system	-32768..3276 7	-32768..32767 (Default: 0)

3.16 ES-04PM/ES-04PMB (4-channel high-speed pulse output module)


3.16.1 Module overview

- ◆ The ES-04PM module supports 4-channel NPN high-speed pulse output, while the ES-04PMB module supports 4-channel PNP high-speed pulse output.
- ◆ The ES-04PM module can be connected to 8-channel NPN digital inputs, and the ES-04PMB module can be connected to 8-channel PNP digital inputs.
- ◆ The ES-04PM module can output 4 NPN digital outputs, and the ES-04PMB module can output 4 PNP digital outputs.

3.16.2 Module parameters

Hardware Specifications		
Model number	ES-04PM	ES-04PMB
Backplate current	20MA	
Expansion interface	2*20 Pin board-to-board connector	
Wiring connection Installation	I/O wiring: Maximum 1.5mm ² (AWG 16)	
Expansion interface	Installation of DN35 guide rail	
Environmental parameters		
Working temperature	-20℃~75℃	
Environmental humidity	5% to 95% no condensation	
Protection level	IP20	
Pulse output parameters		
Number of channels	4CH	
Output type	Source-type low-level output (PNP)	Source-type high-level output (NPN)
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)	
Output connector	Plug-in connector	
Load type	Pure resistive, inductive, bulb	
Maximum output current	Max. 0.5 A/Channel, independent short-circuit protection for each channel	
Maximum output frequency	200K/Ch	
Data format	16-bit signed integer (Integer)	
Input parameters		
Number of channels	2x4ch	
Input type	Source-type low-level input (PNP)	Source-type high-level input (NPN)
Rated input voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)	
Function	Can be configured as a high-speed pulse start trigger	
Output parameters		
Number of channels	1x4ch	
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)	
Maximum output current	Maximum: 0.5 A/Channel, independent short-circuit protection for each channel	
Function	Can be configured to output emergency stop or stop status as a high-speed	

3.16.3 Introduction to interfaces

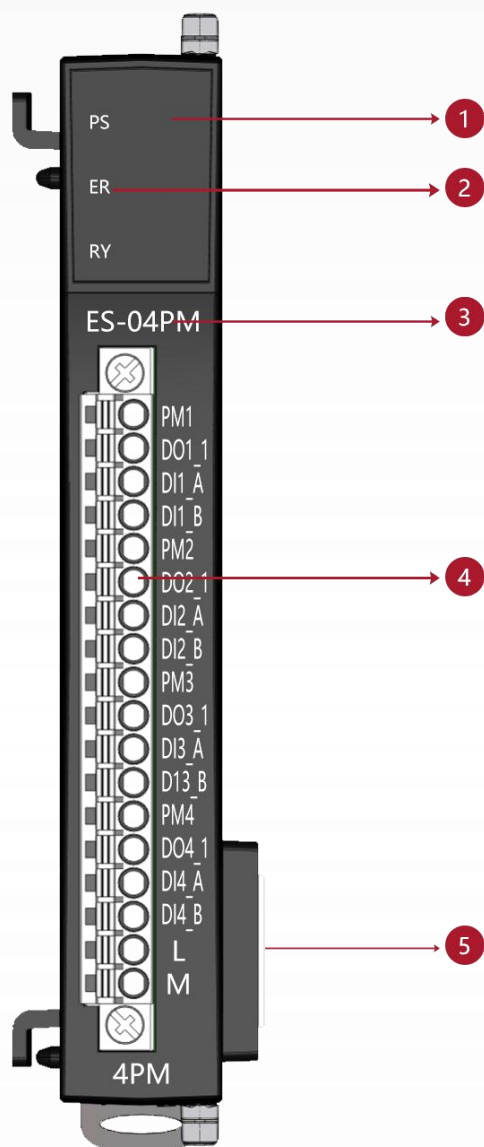

Expansion Module Interface Description

① Backplane system status indicator

② Module Model

③ Pulse output terminal

④ Backplane expansion interface

3.16.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.16.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 35 System Status Indication


 The green light is on
  Flashing red
  Flashing green
  Not bright

3.16.6 Definition of terminal blocks

Terminal Serial Number	ES-04PM	
	notation	clarification
1	PM1	Channel 1 high-speed pulse output
2	DO1_1	Channel 1 digital output DO
3	DI1_A	Channel 1 digital input DI_A
4	DI1_B	Channel 1 digital input DI_B
5	PM2	Channel 2 high-speed pulse output
6	DO2_1	Channel 2 digital output DO
7	DI2_A	Channel 2 digital input DI_A
8	DI2_B	Channel 2 digital input DI_B
9	PM3	Channel 3 high-speed pulse output
10	DO3_1	Channel 3 digital output DO
11	DI3_A	Channel 3 digital input DI_A
12	DI3_B	Channel 3 digital input DI_B
13	PM4	Channel 4 High Speed Pulse Output
14	DO4_1	Channel 4 digital output DO
15	DI4_A	Channel 4 digital input DI_A
16	DI4_B	Channel 4 digital input DI_B
17	L	24VDC Supply Voltage
18	M	Grounding of the supply voltage

3.16.7 Wiring diagram

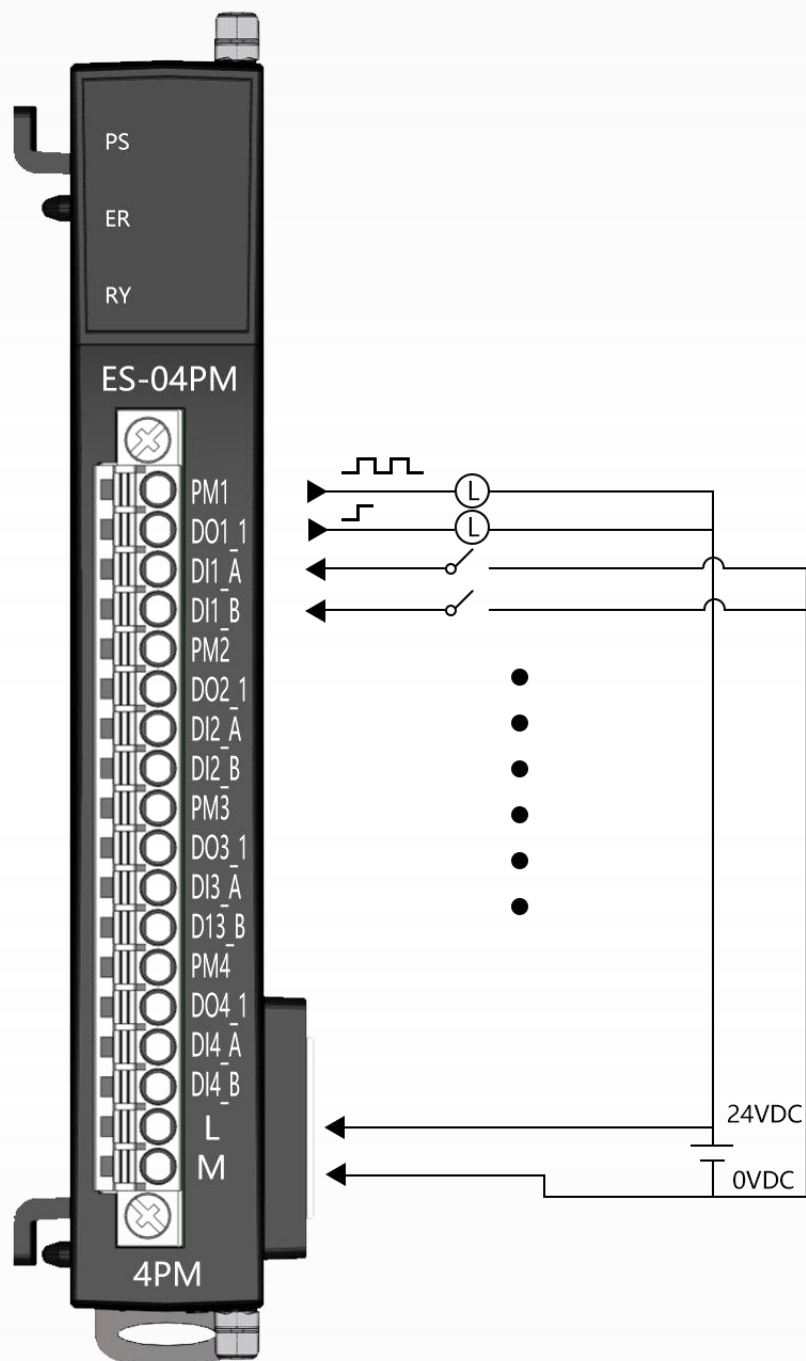

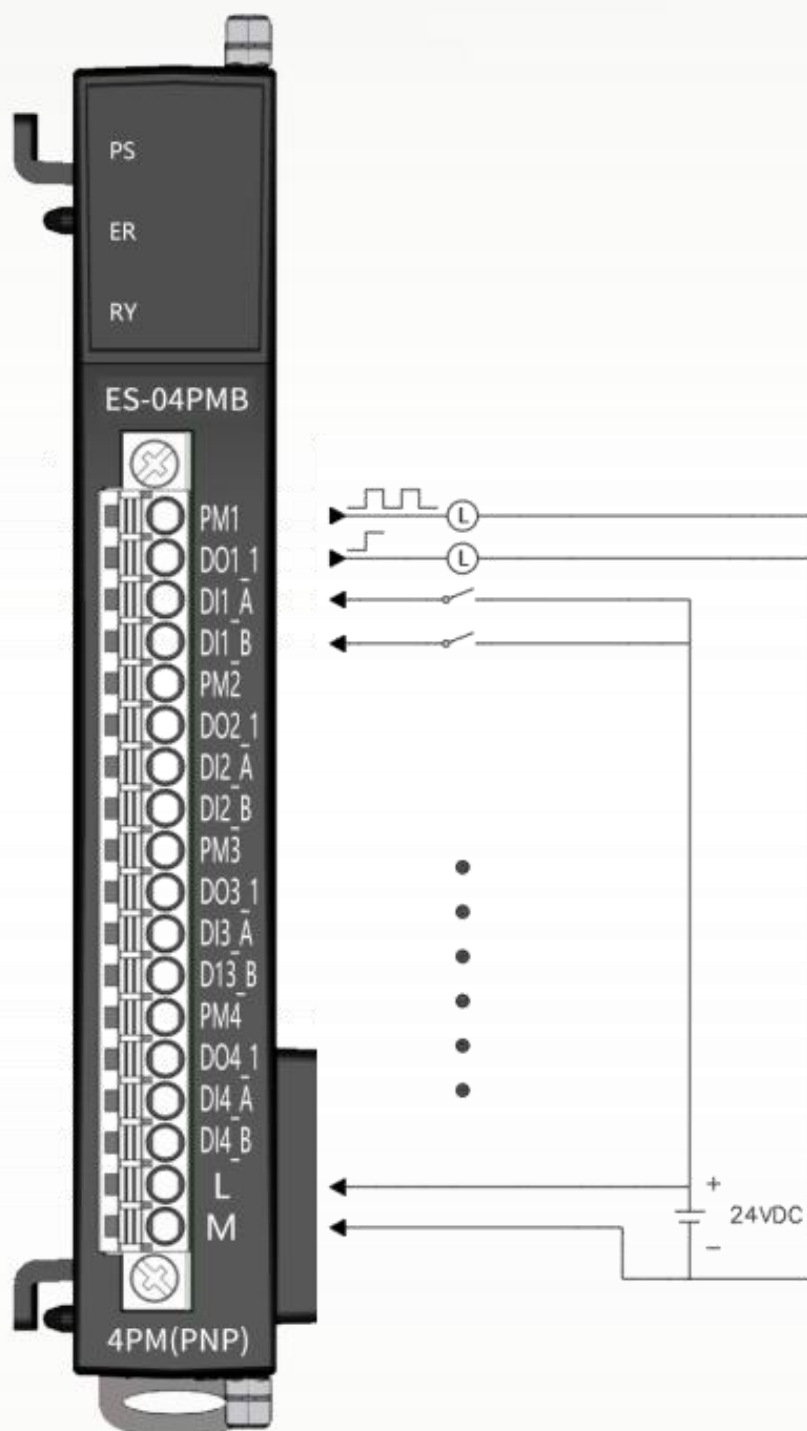

3.16.8 Process data definitions

Feedback Interface Address Assignment									
1 channel	BYTE 0	Ch1 actual current channel output pulse number							
	BYTE 1								
	BYTE 2								
	BYTE 3								
	BYTE 4	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		DQ1	DI1-B	DI1-A	Counter status: 00: Normal count 01: Running 10: Completion 11: Reservations		operational state 00: Downtime status 01: Acceleration phase 10: Frequency arrival 11: Deceleration phase		Enable state
	BYTE 5	error code							
2 channels	BYTE 6..11	Ch2 feedback data (defining parameter Ch1)							
3 channels	BYTE 12...17	Ch3 feedback data (defining parameter Ch1)							
4 channels	BYTE 18...23	Ch4 feedback data (defining parameter Ch1)							

Control Interface Address Assignment									
1 channel	BYTE 0	Ch1 Number of target pulses							
	BYTE 1								
	BYTE 2								
	BYTE 3								
	BYTE 4	Ch1 Target frequency							
	BYTE 5								
	BYTE 6								
	BYTE 7								
	BYTE 8	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		Reservation 1			Jitter Ratio Enable	DQ	reset (a dislocated joint, an electronic device etc) reckoning	non-urgent cessation	enable
	BYTE 9	duty cycle							
2 channels	BYTE 9...17	Ch2 control data (definition refer to Ch1)							
3-channels	BYTE 18...26	Ch3 control data (definition reference Ch1)							
4 channels	BYTE 27...35	Ch4 control data (definition reference Ch1)							

3.16.9 Configuration parameter definitions

Configuration parameters		
Channel 1	BYTE 0	DQ0 Function Selection
	BYTE 1	DQ0 Safe Mode Value
	BYTE 2	Function selection of DI1_A
	BYTE 3	Function selection of DI1_B
	BYTE 4	DI1_A Filtration factor
	BYTE 5	DI1_B Filtration factor
	BYTE 6...10	Pulse output start frequency
	BYTE 11...15	Maximum pulse output frequency
	BYTE 16...20	Curve acceleration time
	BYTE 21	Curve Type
	BYTE 22	PWM Duty Cycle
	BYTE 23	Error Pulse Output Safety Status
Channel 2	BYTE 24...47	CH2 configuration parameters (refer to CH1 configuration parameters)
Channel 3	BYTE 48...71	CH3 configuration parameters (refer to CH1 configuration parameters)
Channel 4	BYTE 72...95	CH4 Configuration Parameters (refer to CH1 Configuration Parameters)

Parameter name		unit (of measure)	specification	Input Range	clarification
Chinese	English (language)				
DO0 Function Selection	DO0 Function	-	enum eration n	DO (default) DO_POS_DIR DO_NEG_DIR PULSE_STATE ALM_OUT	Function selection for each group of output points: DO: Normal IO output DO_POS_DIR: Positive high-speed pulse output direction control DO_NEG_DIR: High-speed pulse output direction reversal control PULSE_STATE: High-speed pulse output completion state ALM_OUT: High-speed pulse output error alarm
DO0 Safe Output Method	DO0 Error Output state	-	enum eration n	Clean (default) SetHigh Hold	The state of the output point is set when the module sends a communication interruption. Clean : Cleared to "0" SetHigh: set to "1" Hold : Hold the current state
DI Function	DI Function	-	enum eration n	DI DI_RISING_START_PWM DI_RISING_FREE_STOP_PWM DI_RISING_STOP_PWM DI_FALLING_START_PWM DI_FALLING_FREE_STOP_PWM DI_FALLING_STOP_PWM DI_RISING_START_FALLING_FREE_ STOP DI_RISING_START_FALLING_STOP DI_FALLING_START_RISING_FREE_ STOP	DI: Common IO input DI_RISING_START_PWM: Rising edge start pulse output DI_RISING_FREE_STOP_PW M: Rising edge stop pulse output (with curve output) DI_RISING_STOP_PWM: Rising edge stops pulse output immediately

				DI_FALLING_START_RISING_STOP	DI_FALLING_START_PWM : Falling edge start pulse output DI_FALLING_FREE_STOP_PWM: Falling edge stop pulse output (with curve output) DI_FALLING_STOP_PWM : Immediate stopping of pulse output on falling edge. DI_RISING_START_FALLING_FREE_STOP: Rising Edge Startup Pulse output. Falling edge stop output DI_RISING_START_FALLING_STOP: Rising edge starts pulse output. Falling stops the output immediately DI_FALLING_START_RISING_FREE_STOP: Falling edge start pulse output. Rising stop output DI_FALLING_START_RISING_STOP: Falling edge start pulse output. Rising immediately stops the output
DI Filter Coefficient	DI Filter	-	decimal	0..255 (Default: 0)	DI Filter Coefficient

			system		
Curve Start Frequency	Curve Start Velocity	Hz	decimal system	1000..200000 (Default: 1000)	Curve Start Frequency
Curve Maximum Frequency	Curve Max Velocity	Hz	decimal system	1000..200000 (Default: 200000)	Curve Maximum Frequency
Curve Acceleration and Deceleration Time	Curve Time	ms	decimal system	100..1000 (Default: 500)	Curve Acceleration and Deceleration-Time
Curve Type	Curve Type		enumeration	NO_CURVE S_CURVE T_CURVE	NO_CURVE: different curves start directly S_CURVE: S-curve T_CURVE: T-curve
Duty cycle of pulses	Pulse Duty	(%)	decimal system	10-90 (Default: 50)	Duty cycle of output pulse
security model	Error_Mode			STOP (default) DEC_STOP Hold	STOP: Stop immediately DEC_STOP : deceleration stop Hold: Hold output

3.17 ES-04DMA (4-channel pulse positioning module)


3.17.1 Module overview

- ◆ The module supports 4-channel NPN high-speed pulse output module.
- ◆ The module can access 16 channels of NPN digital inputs.
- ◆ The module can output 8 NPN digital outputs.

3.17.2 Module parameters

Hardware parameters	
model number	ES-04DMA
Backplane current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	0~+55℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
Pulse output parameters	
channel number	4CH
Output type	Drain Low Output (NPN)
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)
output connector	Plug-in connectors
Load Type	Pure Resistive, Inductive, Bulb
Maximum Output Current	Max. 0.5 A/Ch, independent short-circuit protection per channel
Maximum Output Frequency	200K/Ch
data format	16-bit signed integer (Integer)
input parameter	
channel number	4x4ch
Output type	Drain Low Level Input (NPN)
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)
functionality	Can be configured as digital input, pulse stop, left limit, right limit, zero point, near zero
output parameter	
channel number	2x4ch
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)
Maximum Output Current	Max. 0.5 A/Ch, independent short-circuit protection per channel
functionality	It can be configured as direction output, reverse direction output, digital output, and

3.17.3 Introduction to interfaces

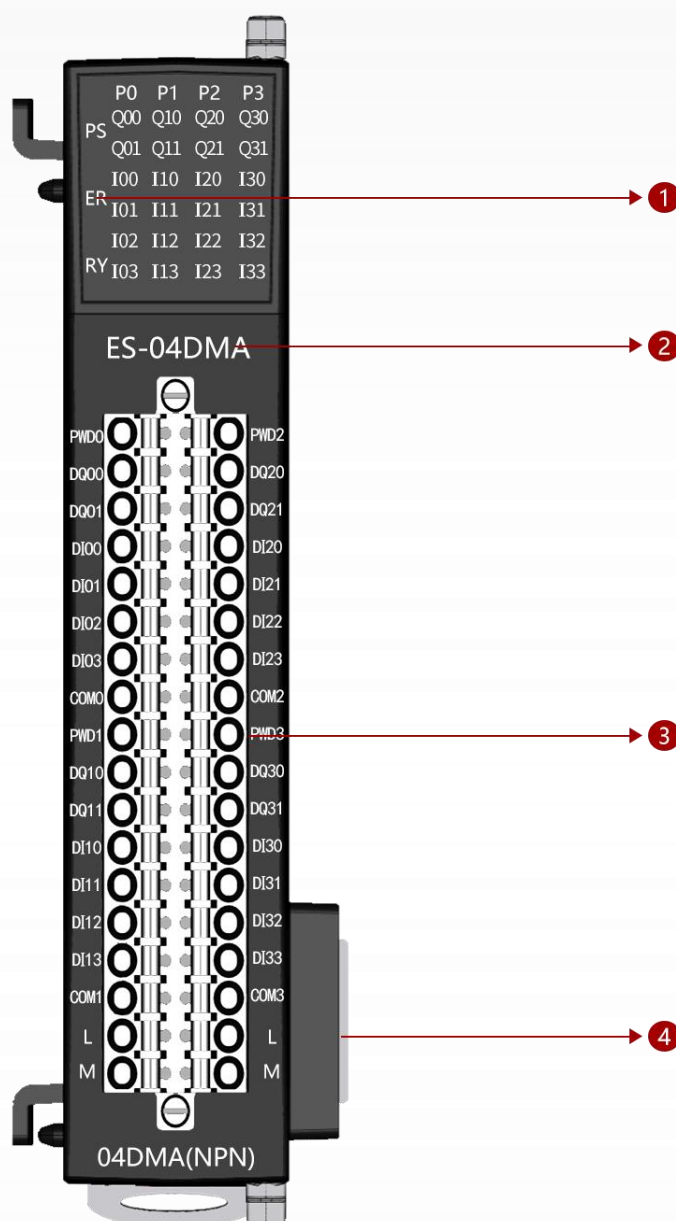

Expansion Module Interface Description

- ① Backplane system status indicator
- ② Module Model
- ③ Pulse output terminal
- ④ Backplane expansion interface

3.17.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.17.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 36 System Status Indication


 The green light is on  Flashing red  Flashing green  Not bright

3.17.6 Definition of terminal blocks

Left terminal serial number	ES-04DMA	
	notation	clarification
1	PWD0	CH1 High-speed pulse output
2	DQ00	Digital output; default function: direction control
3	DQ01	Digital Output; Default Function: Digital Output
4	DI00	Digital input; default function: left limit;
5	DI01	Digital input; default function: right limit;
6	DI02	Digital input; default function: zero point;
7	DI03	Digital input; default function: pulse output stop;
8	COM0	Input common point: 24V+;
9	PWD1	CH2 high-speed pulse output
10	DQ10	Digital output; default function: direction control
11	DQ11	Digital Output; Default Function: Digital Output
12	DI10	Digital input; default function: left limit;
13	DI11	Digital input; default function: right limit;
14	DI12	Digital input; default function: zero point;
15	DI13	Digital input; default function: pulse output stop;
16	COM1	Input common point: 24V+;
17	L	24 supply voltage input
18	M	Common ground

Right terminal serial number	ES-04DMA	
	notation	clarification
1	PWD2	CH3 high-speed pulse output
2	DQ20	Digital output; default function: direction control
3	DQ21	Digital Output; Default Function: Digital Output
4	DI20	Digital input; default function: left limit;
5	DI21	Digital input; default function: right limit;
6	DI22	Digital input; default function: zero point;
7	DI23	Digital input; default function:., pulse output stop;
8	COM2	Input common point: 24V+;
9	PWD3	CH4 high-speed pulse output
10	DQ30	Digital output; default function: direction control
11	DQ31	Digital Output; Default Function: Digital Output
12	DI30	Digital input; default function: left limit;
13	DI31	Digital input; default function: right limit;
14	DI32	Digital input; default function: zero point;
15	DI33	Digital input; default function: pulse output stop;
16	COM3	Input common point: 24V+;
17	L	24 supply voltage input
18	M	Common ground

3.17.7 Wiring diagrams

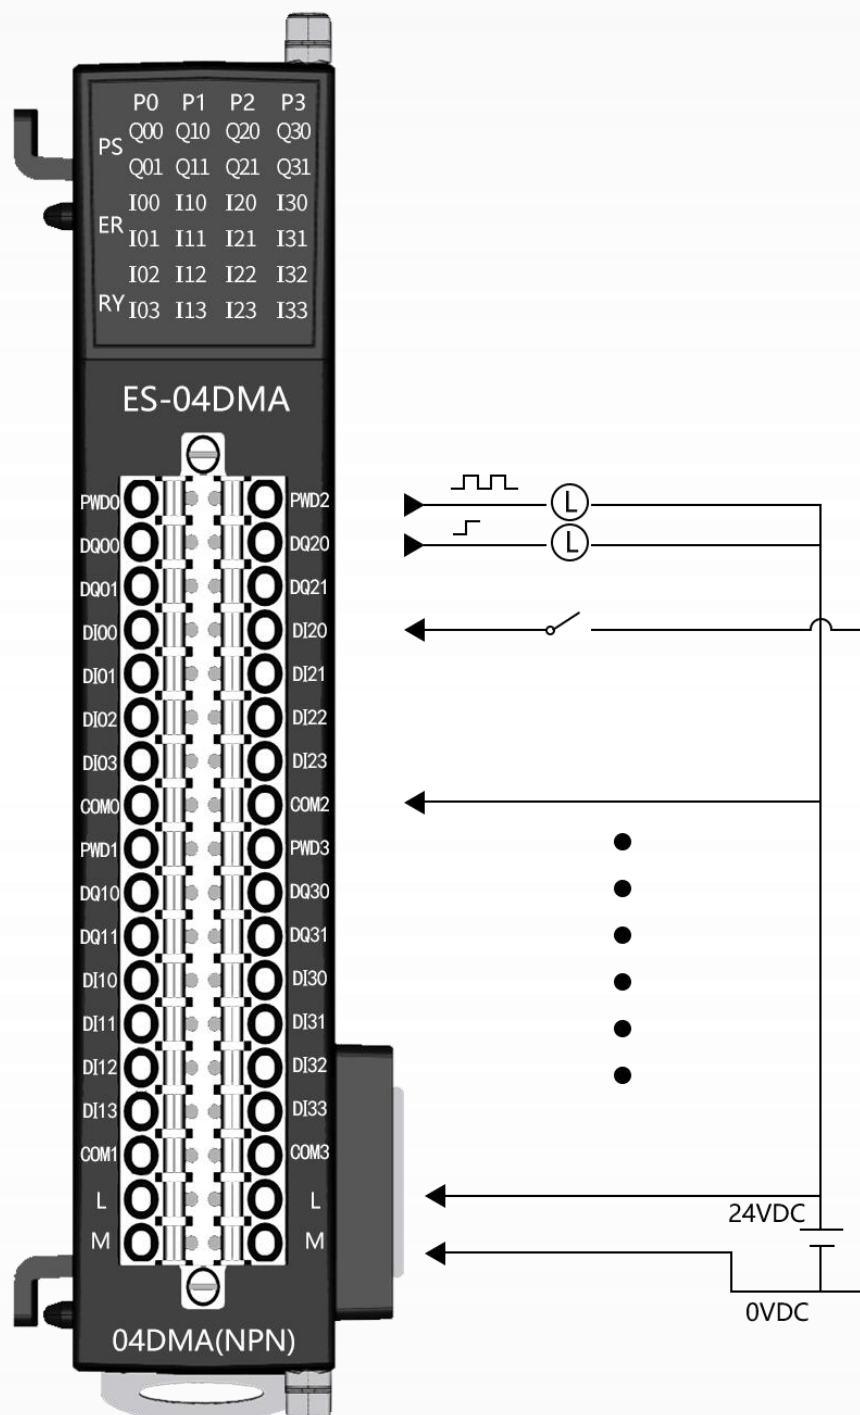

3.17.8 Process data definitions

Input port address assignment									
1 channel	BYTE 0	Ch1 Current motor running position							
	BYTE 1								
	BYTE 2								
	BYTE 3								
	BYTE 4-5	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		DI2 input status	DI1 Input Status	DI0 Input Status	operational state 00: Downtime status 01: Acceleration phase 10: Frequency arrival 11: Deceleration phase		Target location. Arrive.	Return of origin complete.	directional 0: Reverse 1: Positive rotation
		BIT14-BIT15		BIT13	BIT12	BIT11	BIT10	BIT9	BIT8
		reservations		Driver Enable Flag Bit	Tap Flag Bit	security model stop sign classifier for honorific people	DQ1 Output Status	DQ0 Output Status	DI3 Input Status
2 channels	BYTE 6..11	Ch2 Feedback data (definition parameter Ch1)							
3 channels	BYTE 12...17	Ch3 Feedback data (definition parameter Ch1)							
4 channels	BYTE 18...23	Ch4 Feedback data (definition parameter Ch1)							

Output port address assignment									
1 channel	BYTE 0	Ch1 Target position for controlling motor operation							
	BYTE 1								
	BYTE 2								
	BYTE 3								
	BYTE 4	Ch1 Controls the speed of motor operation							
	BYTE 5								
	BYTE 6								
	BYTE 7								
	BYTE 8	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		Safe mode stop Flag bit clear	DQ1 output control	DQ0 output control	Position, speed mode switching 0: Position 1: Speed	removals placement	(math.) return to the origin	STOP cessation	driver enable
	BYTE 9	BIT10-15			BIT 9			BIT 8	
		reservations			point and click enable (computing) (driver enable needs to be turned off)			Velocity Mode and Tap Mode Direction Switching	
2 channels	BYTE 10...19	Ch2 control data (definition refer to Ch1)							
3 channels	BYTE 20...29	Ch3 control data (definition reference Ch1)							
4 channels	BYTE 30...39	Ch4 control data (definition reference Ch1)							

3.17.9 Configuration parameter definitions

Configuration parameters		
Channel 1	BYTE 0	DQ0 Function Selection
	BYTE 1	DQ0 Safe Mode Value
	BYTE 2	DQ1 Function Selection
	BYTE 3	DQ1 Safety Mode Value
	BYTE 4	DI0 function selection
	BYTE 5	DI1 function selection
	BYTE 6	DI2 function selection
	BYTE 7	DI3 function selection
	BYTE 8	DI filter coefficient
	BYTE 9	Curve Type
	BYTE 10...13	Curve Start Frequency
	BYTE 14...17	Curve Maximum Frequency
	BYTE 18...19	Curve Acceleration and Deceleration Time
	BYTE 20...23	Origin return startup speed
	BYTE 24...27	Origin Return Approach Velocity
	BYTE 28	(math.) the origin return model
	BYTE 29	security model
	BYTE 30	Axis operation mode
Channel 2	BYTE 31...61	CH2 configuration parameters (refer to CH1 configuration parameters)
Channel 3	BYTE 62...92	CH3 configuration parameters (refer to CH1 configuration parameters)
Channel 4	BYTE 93...123	CH4 Configuration Parameters (refer to CH1 Configuration Parameters)

Parameter name		unit (of measu re)	specifi cation	Input Range	clarification
Chinese	English (language)				
DO0 Function Selection	DO0 Function	-	enum eratio n	digital output Output Reverse Direction Logic Logic positive direction control (default) Logic Reverse Direction Control Alarm output CW/CCW	Function selection for each group of output points:
DO0 Safe Output Method	DO0 Error Output state	-	enum eratio n	Clean (default) SetHigh Hold	The state of the output point is set when the module sends a communication interruption. Clean : Cleared to "0" SetHigh: set to "1" Hold : Hold the current state

DO1 Function Selection	DO1 Function	-	enum eratio n	Digital output (default) Output Reverse Direction Logic Logic Positive Direction Control Logic Reverse Direction Control Alarm output	Function selection for each group of output points:
DO1 Safe Output Method	DO1 Error Output state	-	enum eratio n	Clean (default) SetHigh Hold	The state of the output point is set when the module sends a communication interruption. Clean : Cleared to "0" SetHigh: set to "1" Hold : Hold the current state
DI0 Function Selection	DI0 function		enum eratio n	digital input Right limit (default) left limit zero point approach zero (math.) Pulse Emergency Stop Pulse start point-to-point (computing) Inverted digital input inversion right limit left limit of inversion zero point of inversion (math.) inversion near zero Inverted Pulse Emergency Stop Inverted pulse start	Digital input: General IO input. Right limit: Right limit input detection Left Limit: Left limit input detection. Zero: 0 point limit input detection. Near Zero: Input detection close to 0 point.
DI1 Function Selection	DI1 function		enum eratio n		
DI2 Function Selection	DI2 function		enum eratio n		

DI3 Function Selection	DI3 function		enum eratio n	inversion point motion	Pulse Emergency Stop: Input detection stops pulse output. Pulse Start: Input detects the start of pulse output. Tap: Input to detect the tap function. Note: Inverted means the input signal is reversed.
DI Filter Coefficient	DI_Fiter	Ns/Ms	decim al syste m	0-255 Default value: 2	DI filter coefficient
Curve Type	Curve_Type		enum eratio n	direct launch T-curve S-curve	Direct start: no curve start T-curve: T-curve activation S-curve: S-curve activation

Curve Starting frequency	StartVelocity	Hz	decimal system	1000-20000 Default value: 1000	Curve Start Frequency
Curve Maximum frequency	MaxVelocity	Hz	decimal system	1000-20000 Default value: 100000	Curve Maximum Frequency
Curve Acceleration and deceleration time	AccDec_Time	ms	decimal system	100-1000 Default value: 500	Curve Acceleration and Deceleration-Time
Return of origin. Starting speed.	ZRN1 Velocity	Hz	decimal system	1000-20000 Default value: 10000	Origin return startup speed
Homeward bound. Approaching velocity.	ZRN2 Velocity	Hz	decimal system	1000-20000 Default value: 1000	Origin Return Approach Velocity

regression mode	ZRN_ MODE		enum eratio n	Home return mode 1 (default) Return-to-origin model 2	Home return mode 1: The drive motor returns to the zero limit. Home return mode 2: The drive motor returns to the set zero limit and decelerates before passing through the near-zero limit and returning to the zero limit.
security model	ERROR_ Mode		enum eratio n	Stop immediately (default) deceleration stop Hold the current state	The state setting of the pulse output when the module sends a communication interruption. Immediate stop: stops the output pulse. Deceleration stop: Deceleration before stopping the output pulse. Hold current state: Holds the current pulse output.
Axis operation mode	AXIS_ MODE		enum eratio n	Absolute positioning (default) relative positioning (of locations)	Absolute positioning: absolute positional positioning Relative positioning: relative positional positioning

3.18 ES-02HC (2-channel high-speed pulse input module)


3.18.1 Module overview

- ◆ The module supports 2-channel NPN high-speed pulse input module.
- ◆ The module can access 4 channels of NPN digital inputs.
- ◆ The module can output 4 NPN digital outputs.

3.18.2 Module generalization parameters

Hardware parameters	
model number	ES-02HC
Backplane current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	0~+55℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
Pulse Input Parameters	
channel number	2CH
Output type	Drain Low Output (NPN)
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)
output connector	Plug-in connectors
Input Type	Incremental Encoder, PWM, Switching
Maximum Input Current	Max. 0.5 A/Ch, independent short-circuit protection per channel
Maximum Input Frequency	200K/Ch
data format	16-bit signed integer (Integer)
input parameter	
channel number	2x2ch
Output type	Drain Low Level Input (NPN)
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)
functionality	Configurable for single counting, AB phase counting, digital inputs
output parameter	
channel number	2x2ch
Rated output voltage	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)
Maximum Output Current	Max. 0.5 A/Ch, independent short-circuit protection per channel
functionality	Configurable as a counting mode comparison output or as a normal digital output

3.18.3 Introduction to interfaces

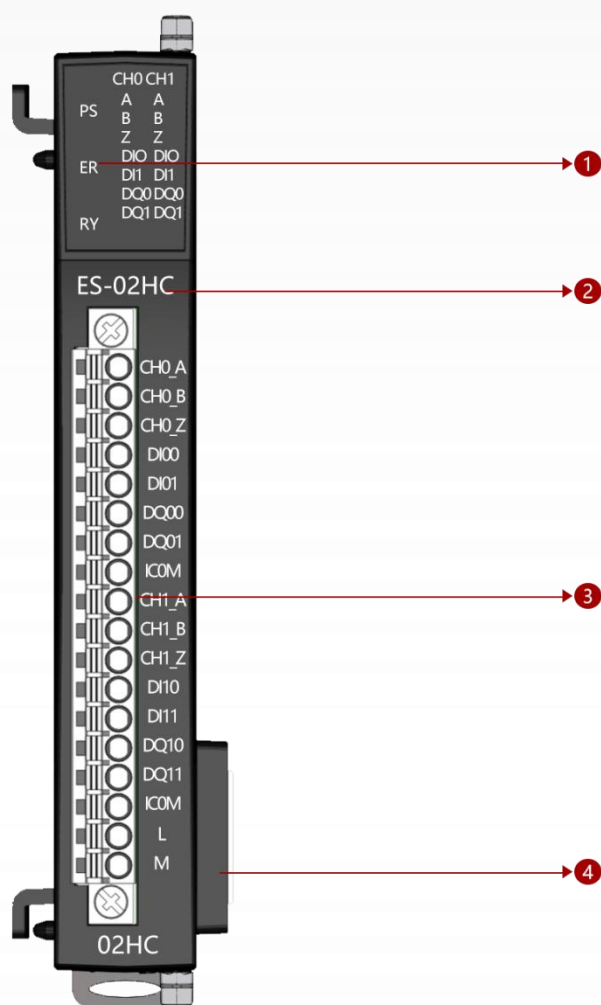

Expansion Module Interface Description

- ① Backplane system status indicator
- ② Module Model
- ③ Pulse output terminal
- ④ Backplane expansion interface

3.18.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.18.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error


Table 37 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright

3.18.6 Definition of terminal blocks

Terminal Serial Number	ES-02HC	clarification
	notation	
1	A	CH1 High-speed pulse input;
2	B	High-speed pulse inputs, digital inputs; Default Function: AB phase encoder mode;
3	Z	Digital Input; Default Function: Digital Input;
4	DI00	Digital Input; Default Function: Digital Input;
5	DI01	Digital Input; Default Function: Digital Input;
6	DQ00	Comparison output, digital output; Default function: digital output;
7	DQ01	Comparison Output, Digital Output; Default Function: Digital Output;
8	ICOM	Input common point: 24V+;
9	A	CH2 High-speed pulse input;
10	B	High-speed pulse inputs, digital inputs; Default Function: AB phase encoder mode;
11	Z	Digital Input; Default Function: Digital Input;
12	DI10	Digital Input; Default Function: Digital Input;
13	DI11	Digital Input; Default Function: Digital Input;
14	DQ10	Comparison output, digital output; Default function: digital output;
15	DQ11	Comparison Output, Digital Output; Default Function: Digital Output;
16	ICOM	Input common point: 24V+;
17	L	24 Supply voltage input;
18	M	Common ground terminal;

3.18.7 Wiring diagram

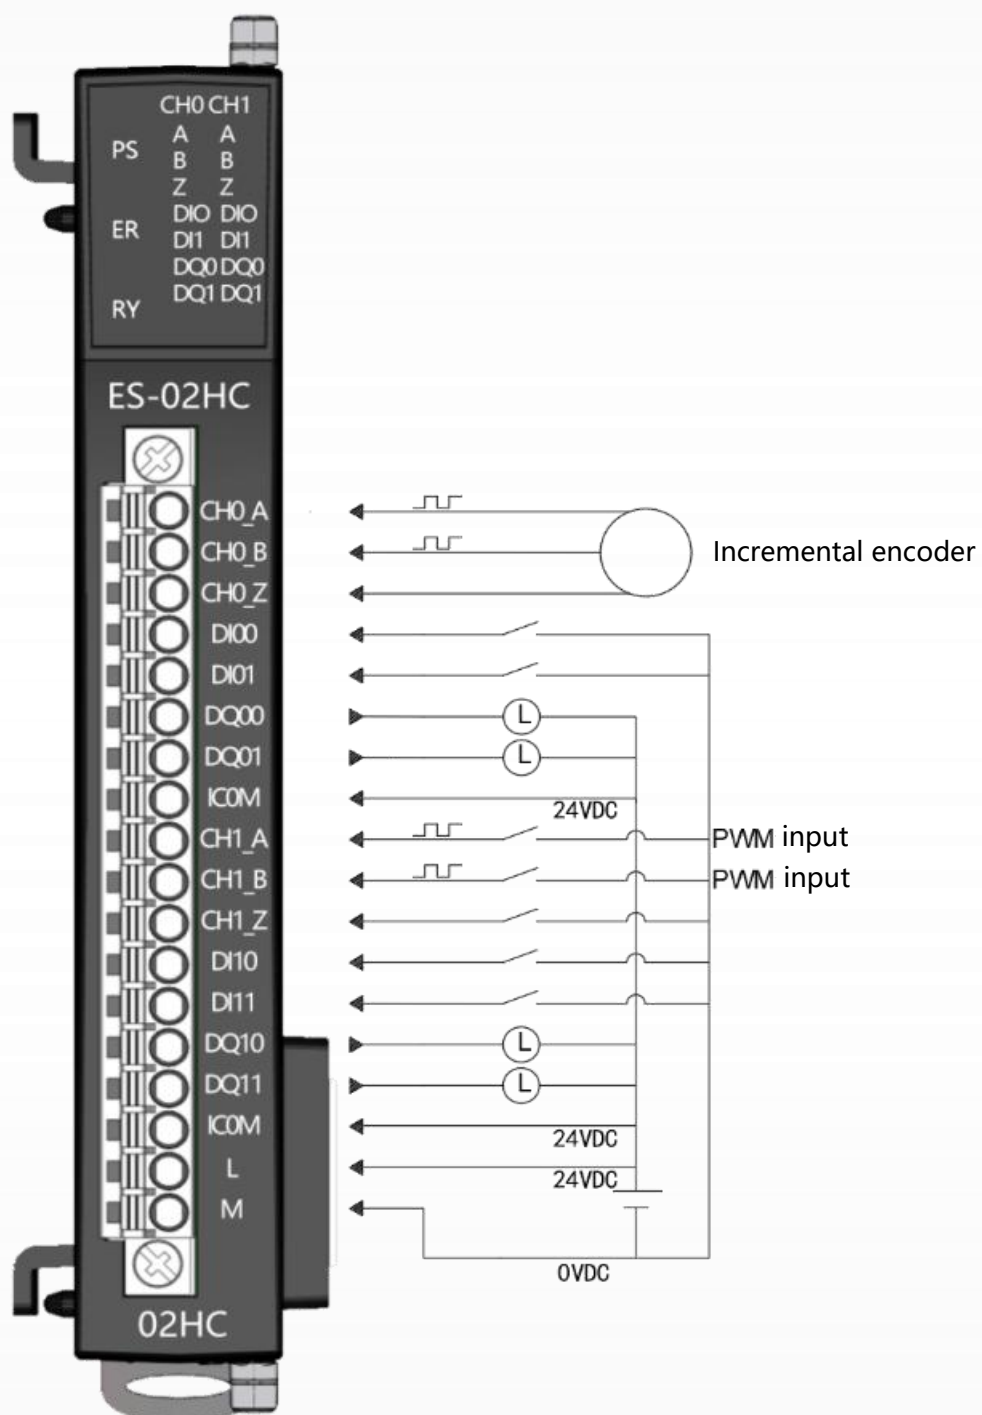

3.18.8 Process data definitions

Input port address assignment									
1 chann el	BYTE 0	CH1 pulse counting in real time							
	BYTE 1								
	BYTE 2								
	BYTE 3								
	BYTE 4	CH1 Latch Count							
	BYTE 5								
	BYTE 6								
	BYTE 7								
	BYTE 8	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		lower limit of count flag position	upper limit of count flag position	digital quantity Input IO2	digital quantity Input IO1	direction of countin g 0: Reverse 1: Positive rotation	Encoder compare output valid bits	Count initial value startup	latch
		BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		reservations					Safety status flag bit	digital input ioz	digital input iob
2 chann els	BYTE 9...17	Ch2 Feedback data (definition parameter Ch1)							

Output port address assignment									
1 chan nel	BYT E 0	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		Single-phase counting mode reverse direction enable	count overflow reset enable (computing)	DQ1	DQ0	Counter Value Clear	counte r enable	reverse enable	Compa re Enable
		BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		reservations							safety sign bit clear
2 chan nels	BYT E 1	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		Single-phase counting mode reverse direction enable	Count overflow reset enable	DQ1	DQ0	Counter Value Clear	counte r enable	reverse enable	Compa re Enable
		BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		reservations							safety sign bit clear

3.18.9 Configuration parameter definitions

Configuration parameters		
Channel 1	BYTE 0..7	upper limit of count
	BYTE 8...15	lower limit of count
	BYTE 16...23	starting value
	BYTE 24...31	Reference value A
	BYTE 32...39	Reference value B
	BYTE 40	DIB function selection
	BYTE 41	DIZ Function Selection
	BYTE 42	DI0 function selection
	BYTE 43	DI1 function selection
	BYTE 44	counting start
	BYTE 45	filtering time
	BYTE 46	counting multiplier
	BYTE 47	DO0 output mode
	BYTE 48	DO1 output mode
	BYTE 49	DO0 Safety Mode
	BYTE 50	DO0 Safety Mode
	BYTE 51	Encoder Count Safe Mode
	BYTE 52	Counting unit switching
	BYTE 53	update cycle
Channel 2	BYTE 54...107	CH2 configuration parameters (refer to CH1 configuration parameters)

Parameter name		unit (of measur e)	specification	Input Range	clarification
Chinese writing	English (language)				
fig. put sth online	Count_Upline		decimal system	0-16777215 Default value: 16777215	fig. put sth online
count up and down	Count_Downline		decimal system	0-16777215 Default value: 16777215	count up and down
starting value	Count_Initvalue		decimal system	0-16777215 Default value: 16777215	starting value
Reference value A	CmpA_Value		decimal system	0-16777215 Default value: 16777215	Reference A (and only in normal counting) (Used in mode)
Reference value B	CmpB_Value		decimal system	0-16777215 Default value: 16777215	Reference value B (and only in normal counting) (Used in mode)
DIB Functions	DIB_Function		enumeration	digital input Single-phase counting gate control	Function selection for each group of input points;

				Functionality preservation AB phase encoder mode Default value: AB phase encoder mode	
DIZ Functions	DIZ_Function		enumeration	DI Trigger Rising Edge Trigger Activation DI trigger falling edge trigger start DI trigger rising edge trigger stop DI trigger falling edge trigger stop digital input Latch Enable Z-phase control enable Default value: digital input	Function selection for each group of input points;

DIO Function	DIO_Function		enumeration	DI Trigger Rising Edge Trigger Activation DI trigger falling edge trigger start DI trigger rising edge trigger stop DI trigger falling edge trigger stop digital input Latch Enable Z-phase control enable Default value: digital input	Function selection for each group of input points;
--------------	--------------	--	-------------	---	--

DI1 Function	DI1_Function		enumeration	DI Trigger Rising Edge Trigger Activation DI trigger falling edge trigger start DI trigger rising edge trigger stop DI trigger falling edge trigger stop digital input Latch Enable Z-phase control enable Default value: digital input	Function selection for each group of input points;
counting start	Count Starts		enumeration	current value starting value Default value: current value	Startup function selection per group;

filtering time	Filtering Time	Ns/Ms	enumeration	DIV1 DIV4 DIV16 DIV64 Default value: DIV1	Filter time;
counting multiplier	Count_Doubling		enumeration	Model I Model II Model III Default value: mode 1	Mode 1: Single octave Mode 2: Dual Frequency Mode 3: 4x Frequency
DO0 output mode	DO0_Output Mode		enumeration	Output Mode I Output mode II Output Mode III Output mode IV Output mode V Default value: output mode V	Output Mode I: Greater than A Output Mode II: Less than A Output Model III: Between A and B Output Mode 4: Less than A or greater than B Output Mode V: Digital Output

DO1 output mode	DO1_Output Mode		enumeration	Output Mode I Output mode II Output Mode III Output mode IV Output mode V Default value: output mode V	Output Mode I: Greater than A Output mode II: less than A Output model III: between A and B Output Mode 4: Less than A or greater than B Output Mode V: Digital Output
DO0 Safety Mode	DO0_Safe Mode		enumeration	DO Clearance DO Set 1 DO keep	Safe Mode function selection for each group;
DO1 security model	DO1_Safe Mode		enumeration	DO Clearance DO Set 1 DO keep Default value: DO clear	Safe Mode function selection for each group;
Encoder Count security model	Encoder Count Safe Mode		enumeration	stop counting The count is set to the initial value Holds the current	Encoder count per group Safe mode function selection;

				count value Default value: counting stops	
Counting unit switching	Counting Unit Switching		enumeration	numerical value frequency cyclicality Default value: counting stops	Count value: number of pulses Frequency hz Period: 1/frequency (ms)
update cycle	RENEW Cycle	ms	enumeration	10ms 100ms 500ms 2000ms Default value: 10ms	update cycle

3.19 ES-02MB-485 (2-channel 485 module)


3.19.1 Module overview

- ◆ The module supports 2-channel Modbus RTU 485 slave communication.
- ◆ The module supports TYPIC-USB parameter download.

3.19.2 Module generalization parameters

Hardware parameters	
model number	ES-02MB-485
Backplane Current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	0~+55℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
Modbus communication format	
channel number	2CH
transfer mode	Modbus _RTU Master
Baud (kbps)	2400,4800,9600,19200,38400,57600,115200
function code	01h, 02h, 03h, 04h, 05h, 06h, 0fh, 10h

3.19.3 Introduction to interfaces

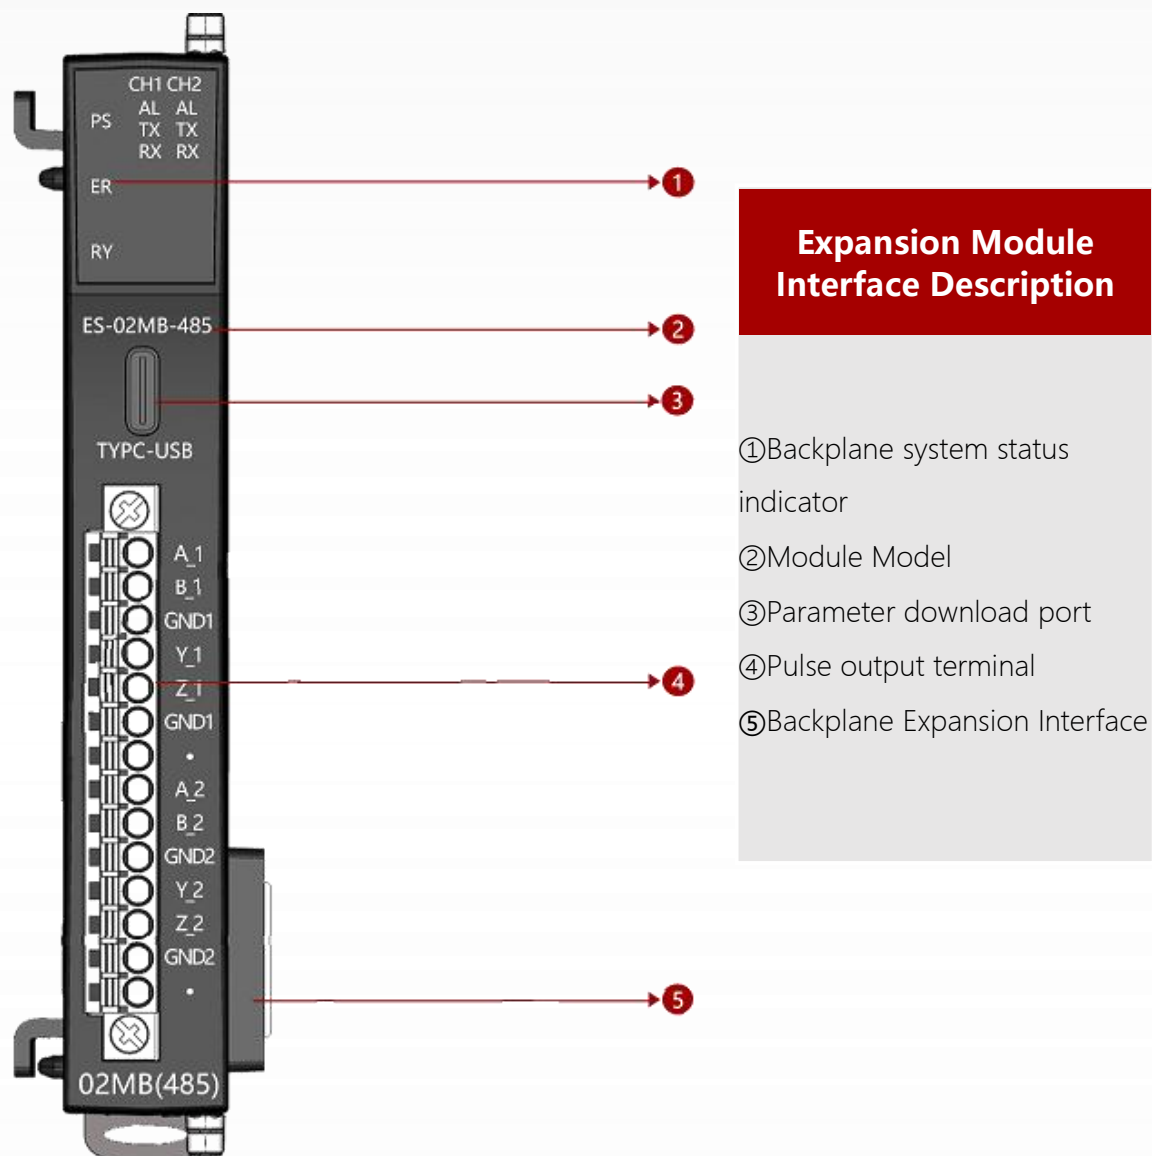

3.19.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.19.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 38 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright


name (of a thing)	color	clarification
AL	green light flashing	Modbus communication exception. Data timeout or receive data error
RX	greener	Modbus has data reception
TX	greener	Modbus has data sending

LED Indicator Definition

3.19.6 Definition of terminal blocks

Terminal Serial Number	ES-02MB-485	
	notation	clarification
1	TX_1	RS485-A
2	TX_2	RS485-B
3	GND1	grounding
4	Y_1	reservations
5	Z_1	reservations
6	GND1	grounding
7	A_2	RS485-A
8	B_2	RS485-B
9	GND2	grounding
10	Y_2	reservations
11	Z_2	reservations
12	GND2	grounding

3.19.7 Wiring diagram

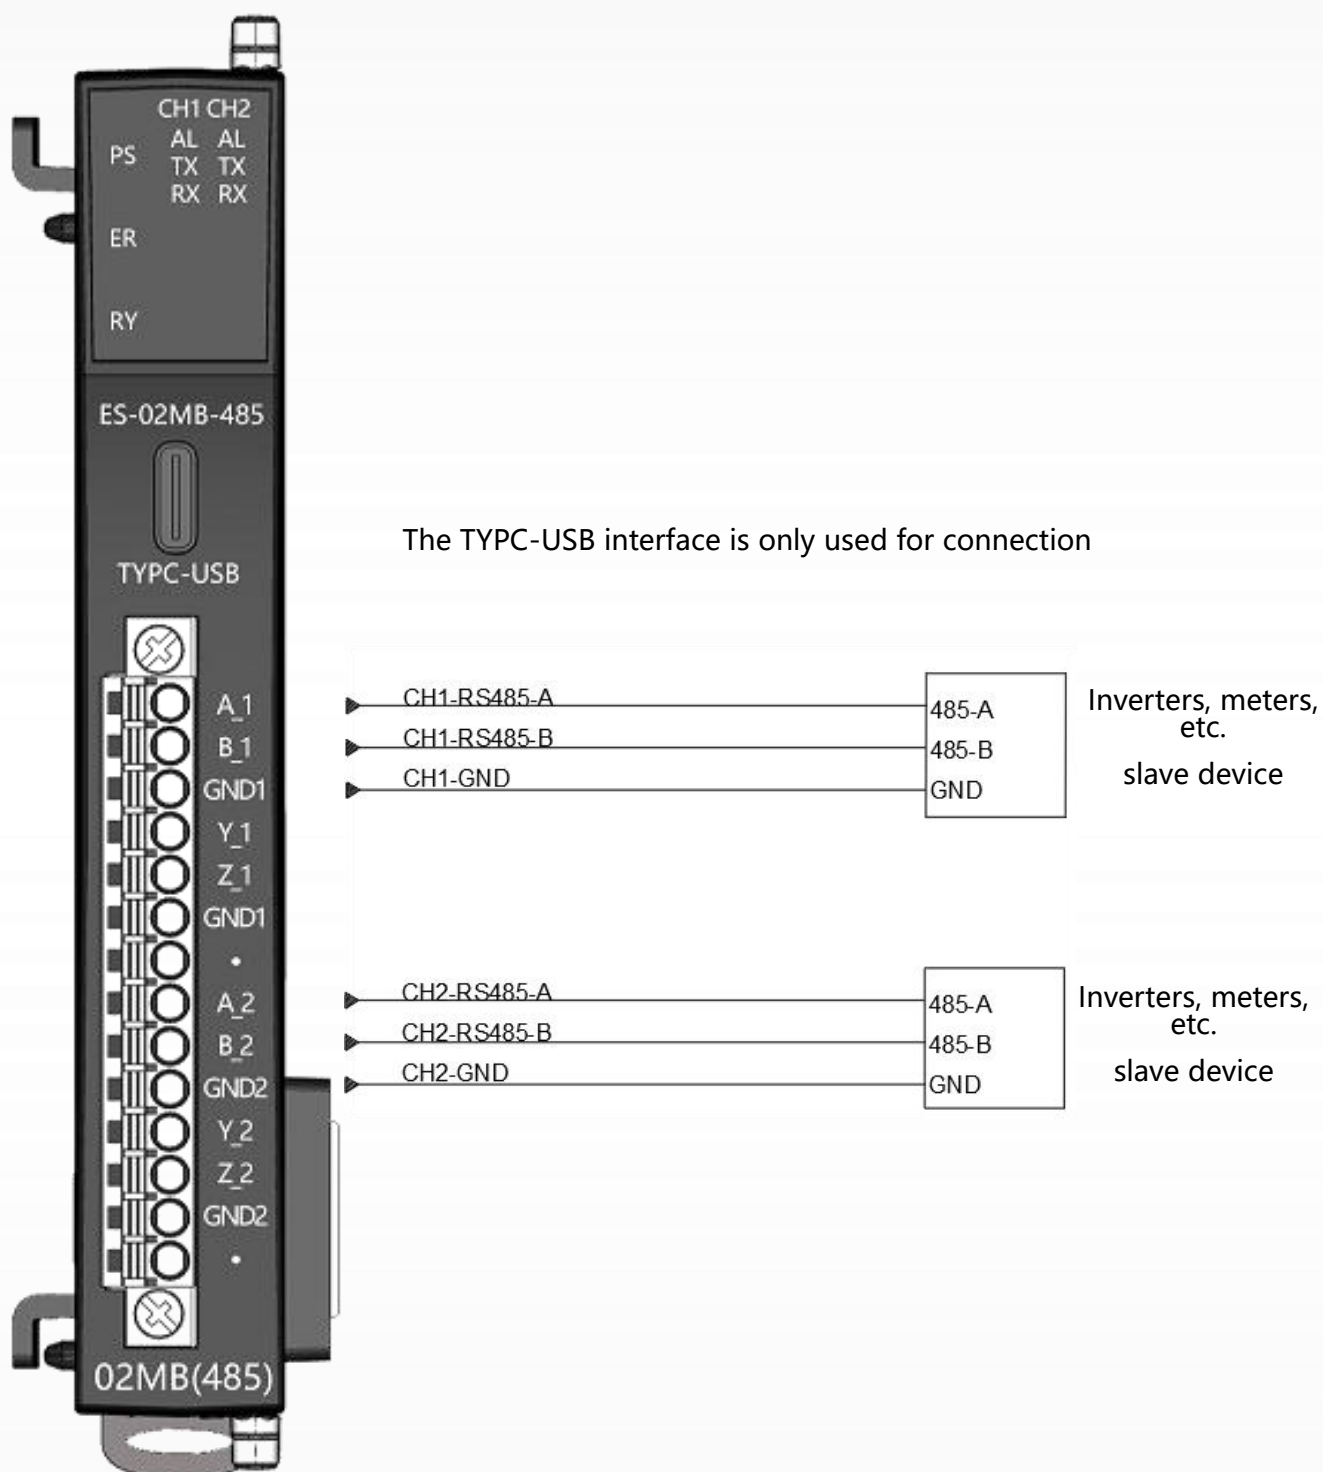

3.19.8 Parameter definition with LAE-CONFIG

Parameter name	specificat ion	Input Range	clarification
Chinese writing			
COM Baud Rate	enumerati on	2400,4800,9600,1 9200,38400,57600 ,115200	baud
COM communicati on parameters	enumerati on	8Date, None Parity, 1Stop 8Date, Even Parity, 1Stop 8Date, Odd Parity, 1Stop 8Date, Exen Parity, 2Stop 8Date, Odd Parity, 2Stop 8Date, None Parity, 2Stop	Data Bits, Parity, Stop Bits
COM frame interval time	decimal system	0-100 Default value: 0	frame rate
COM Termination Resistor	enumerati on	prohibit the use of sth. start using Default value: Disabled	Terminating Resistors
COM communicati on status	enumerati on	communication blackout Communications continue Default value: communication stop	communication status

ports	enumeration	Port 1 Port 2	Channel Selection Selection;
slave address	decimal system	0~255	Slave Address Selection Selection;
function code	enumeration	01 Reading Coil 02 read discrete quantities 03 Read registers 04 Read Input Register 05 Write Single Coil 06 Write Single Register 15 Write multiple coils 16 Write Multiple Holding Registers free agreement	function code
polling time	decimal system	100~3000 Default value: 300	polling time
timeout	decimal system	100~3000 Default value: 100	timeout
Status word enable	tick	Check to activate the communication status word	You can see the communication status word after activation No status words for inactivation
Control Word Enable	tick	Check to activate the communication status word	Control word communication after activation Default direct communication without activation

3.20 ES-02MB-232 (2-channel 232 module)


3.20.1 Module overview

- ♦ The module supports 2-channel Modbus RTU 232 device communication.
- ♦ The module supports TYPIC-USB parameter download.

3.20.2 Module generalization parameters

Hardware parameters	
model number	ES-02MB-232
Backplane Current	20MA
Extended Interface	2*20Pin Board-to-Board Connector
connect a wire	I/O wiring: Max.1.5mm ² (AWG 16)
Installation	DN35 rail mounting
Environmental parameters	
operating temperature	0~+55℃
Environmental humidity	5%-95% non-condensing
protection class	IP20
Modbus communication format	
channel number	2CH
transfer mode	Modbus_RTU Master
Baud (kbps)	2400,4800,9600,19200,38400,57600,115200
function code	01h, 02h, 03h, 04h, 05h, 06h, 0fh, 10h

3.18.3 Introduction to interfaces

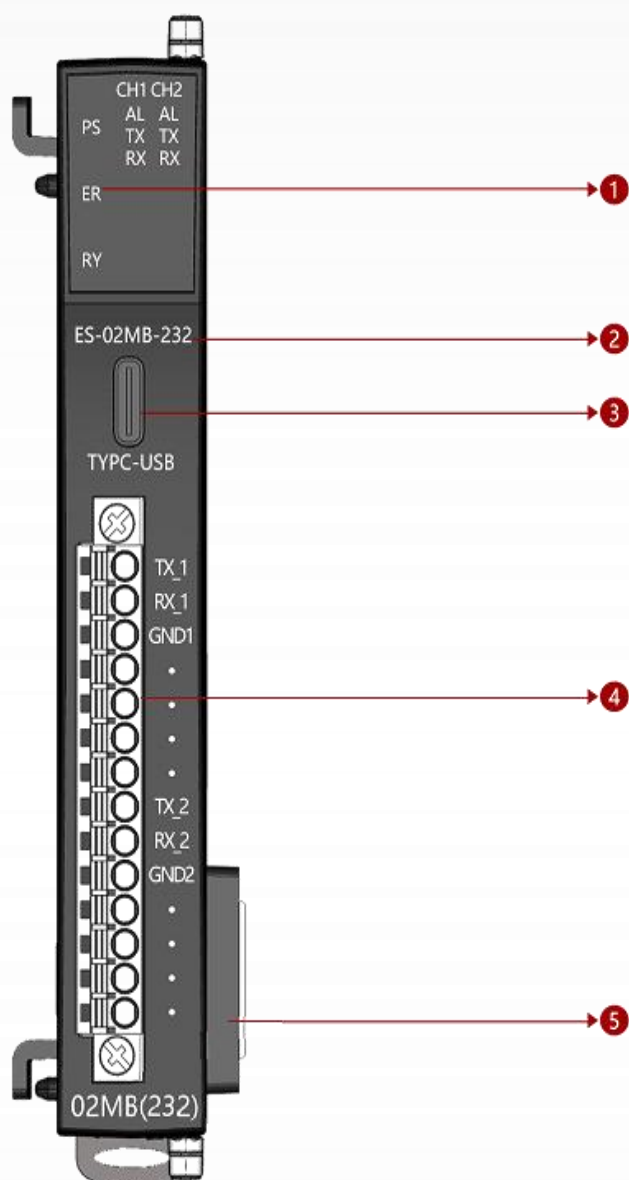

Expansion Module Interface Description

- ① Backplane system status indicator
- ② Module Model
- ③ Parameter download port
- ④ Pulse output terminal
- ⑤ Backplane Expansion Interface

3.20.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.20.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
○	○	○	Expansion module without power supply
●	○	◐	Expansion Module Backplane Initialization
●	○	●	Expansion modules are functioning properly
●	◐	○	Expansion Module Backplane Error

Table 39 System Status Indication

● The green light is on ◐ Flashing red ◐ Flashing green ○ Not bright


name (of a thing)	color	clarification
AL	green light flashing	Modbus communication exception. Data timeout or receive data error
RX	greener	Modbus has data reception
TX	greener	Modbus has data sending

LED Indicator Definition


3.20.6 Definition of terminal blocks

Terminal Serial Number	ES-02MB-232	
	notation	clarification
1	TX_1	RS232-A (DB9 pin: 2)
2	RX_1	RS232-B (DB9 pin: 3)
3	GND1	Grounding (DB9 pin: 5)
4	•	reservations
5	•	reservations
6	•	reservations
7	TX_2	RS485-A (DB9 pin: 2)
8	RX_2	RS485-B (DB9 pin: 3)
9	GND2	Grounding (DB9 pin: 5)
10	•	reservations
11	•	reservations
12	•	reservations

3.20.7 Wiring diagram

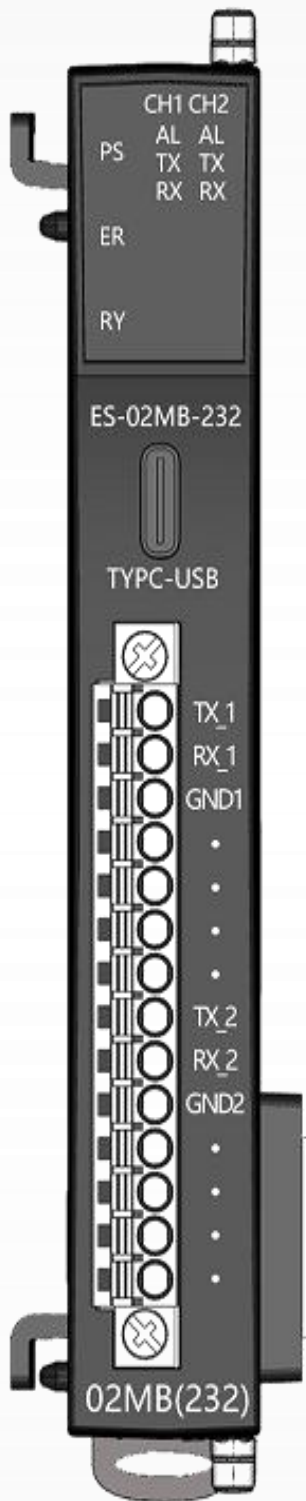

The TYPIC-USB interface is only used for connection

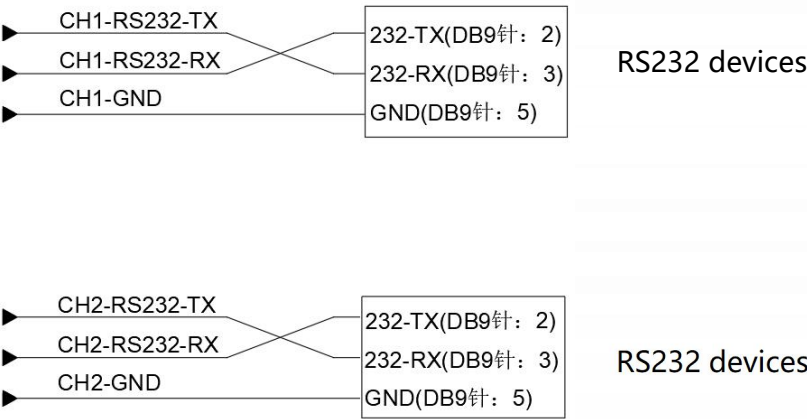

3.20.8 Define the parameters using LAE-CONFIG

Parameter Name	Format	Input range	Explanation
Chinese			
COM baud rate	Enumeration	2400,4800,9600,19200,38400,57600,115200	Baud rate
COM communication parameters	Enumeration	8Data, None Parity, 1Stop 8Data, Even Parity, 1Stop 8Data, Odd Parity, 1Stop 8Data, Even Parity, 2Stop 8Data, Odd Parity, 2Stop 8Data, None Parity, 2Stop	Data bit, parity check, stop bit
COM frame interval time	Decimal system	0-100 Default value: 0	Frame interval time
COM terminal resistance	Enumeration	Disable Enable Default value: Disable	Terminal resistor
COM communication status	Enumeration	Communication stopped Communication resumed Default value: Communication stopped	Communication status
Port	Enumeration	Port 1 Port 2	Channel selection;
From the machine address	Decimal system	0~255	Slave address selection; Function code
Function code	Enumeration	01 Read coil 02 Read discrete quantity 03 Read register 04 Read input register 05 Write single coil 06 Write single register 15 Write multiple coils 16 Write multiple hold registers Free protocol	Polling time
Polling time	Decimal system	100~3000 Default value: 300	Exceeding time
Exceeding time	Decimal system	100~3000 Default value: 100	After activation, the communication status word can be seen, with the minimum unit being a word.
Status word enable	Check box	Check to activate communication status word	1 function code occupies 2 bits: 00 idle, 01 busy, 11 timeout.
Control word enableCOM baud rate	Check box	Check to activate communication status word	When not activated, there is no status word.

3.21 ES-04IOL (4-channel IOLINK master station module)


3.21.1 Module Overview

- ◆ The module supports communication with 4-channel IOLINK slave devices.
- ◆ The module supports TYP-USB parameter download.
- ◆ The maximum number of digital PNP inputs is 4; the maximum number of digital PNP & NPN outputs is 4.

3.21.2 Module parameter values

Hardware Specifications	
Model number	ES-04IOL
Backplate current	20MA
Expansion interface Connecting the wires	2*20-pin board-to-board connector
Installation method	I/O wiring: Max. 1.5mm ² (AWG 16)
Model number	DN35 rail mounting
Environmental parameters	
Working temperature	-20°C~75°C
Environmental humidity	5%~95% No condensation
Protection level	IP20
IO-LINK format	
Number of IO-LINK channels	4CH
Interface data	Type C
IO-LINK type	4xClassA,io-linkV1.1
IO-LINK connection	European type plug-in spring terminals
Communication rate	COM1(4.8Kbps) 、 COM2(38.4Kbps) 、 COM3(230.4Kbps)
Digital quantity	
Digital quantity input	Maximum 4 points, 24VDC (-15% + 20%), PNP
Input filtering	Minimum 2ms
Digital quantity output	Maximum 4 points, 24VDC (-15% + 20%), PNP & NPN
Maximum output current	Single channel 0.5A (MAX)

3.21.3 Interface Introduction

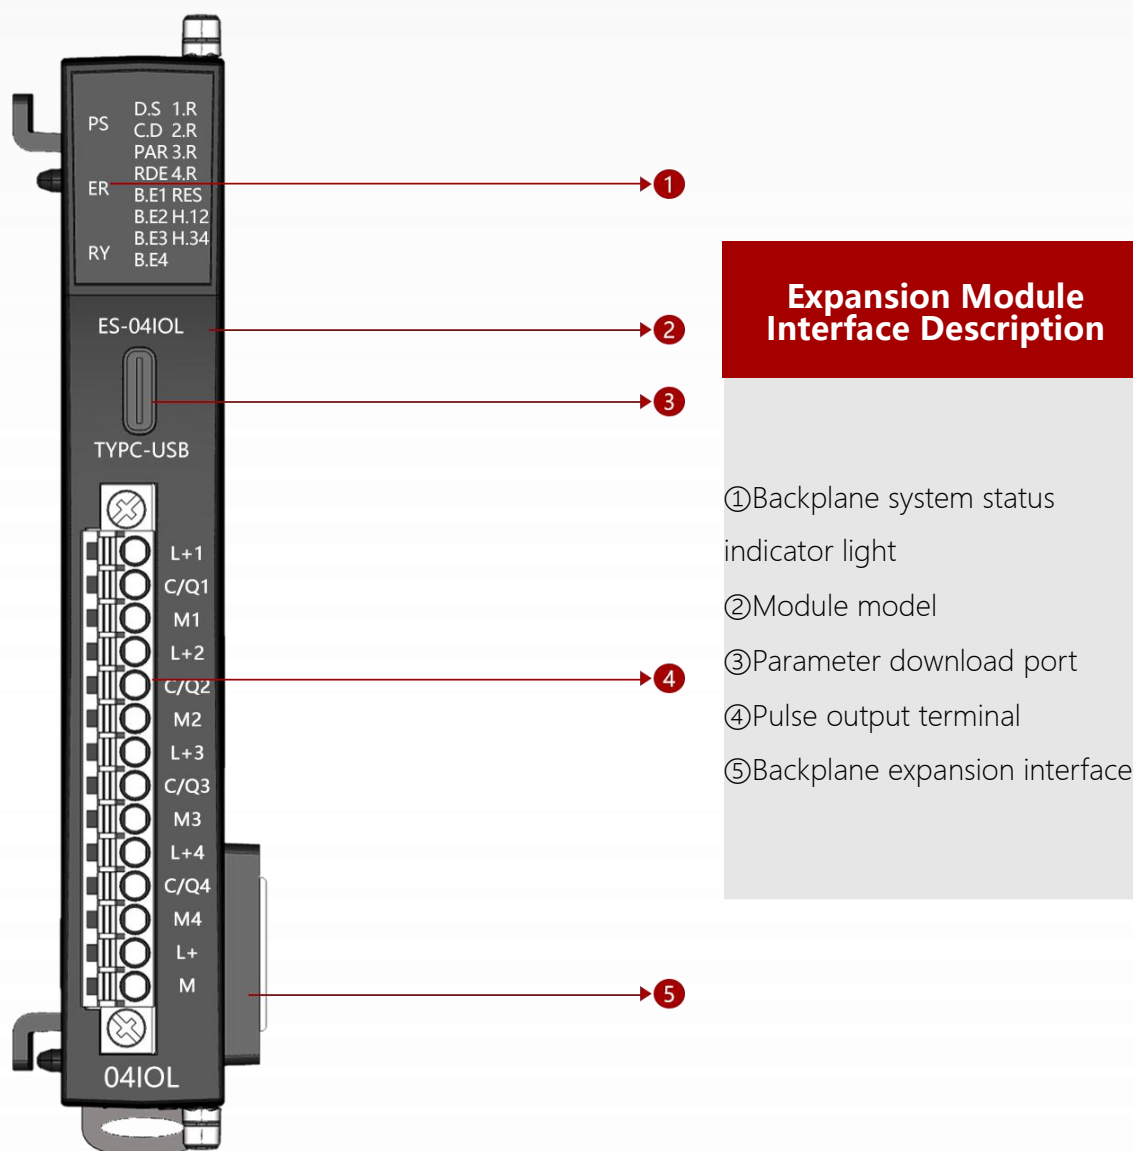

3.18.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.18.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 40 System Status Indication

 The green light is on  Flashing red  Flashing green  Not bright


LED light		Normal state	Error state	Explanation
D.S	There is a disconnection from the slave station.	Extinguish	Flashing	At least one of the four slave stations is disconnected.
C.D	The settings of the configuration software are different from those of the PLC.	Extinguish	Flashing	Use the configuration software to reconfigure or modify the PLC module es04iol sub-slot until they are the same.
PAR	The LED3. module does not match the process data on the backplane / Configuring the parameters of the slave station module itself.	Extinguish	Flashing	Restart the module and the backplane together.
RDE	Reading the parameters in the EEPROM.	Extinguish	Flashing	Wait until all data is read before configuring the parameters.
B.E1	Corresponding port 1	Extinguish	Constant	The process data length of the module and the backplane is lower than that of the slave station. Reconfigure the process data length.
B.E2	Corresponding port 2	Extinguish	Constant	
B.E3	Corresponding port 3	Extinguish	Constant	
B.E4	Corresponding port 4	Extinguish	Constant	
1.R	Corresponding port 1	Flashing	Extinguish	CH1 IO-link communication light
2.R	Corresponding port 2	Flashing	Extinguish	CH2 IO-link communication light
3.R	Corresponding port 3	Flashing	Extinguish	CH3 IO-link communication light
4.R	Corresponding port 4 Auxiliary power supply	Out	Extinguish	CH4 IO-link communication light
RES	1iolink chip 1 may be damaged	Out	Constant	
H.12	1iolink chip 2 may be damaged	Out	Constant	
H.3 4	There is a disconnection from the slave station.	Out	Constant	

Definition of LED Indicator Lights

3.21.6 Terminal connection definition

Terminal number	ES-04IOL	
	Symbol	Explanation
1	L+1	24V+ (brown)
2	C/Q1	IOLINK signal line (black)
3	M1	0V (blue)
4	L+2	24V+ (brown)
5	C/Q2	IOLINK signal line (black)
6	M2	0V (blue)
7	L+3	24V+ (brown)
8	C/Q3	IOLINK signal line (black)
9	M3	0V (blue)
10	L+	Power positive
11	M	Power negative

3.21.7 Wiring diagram

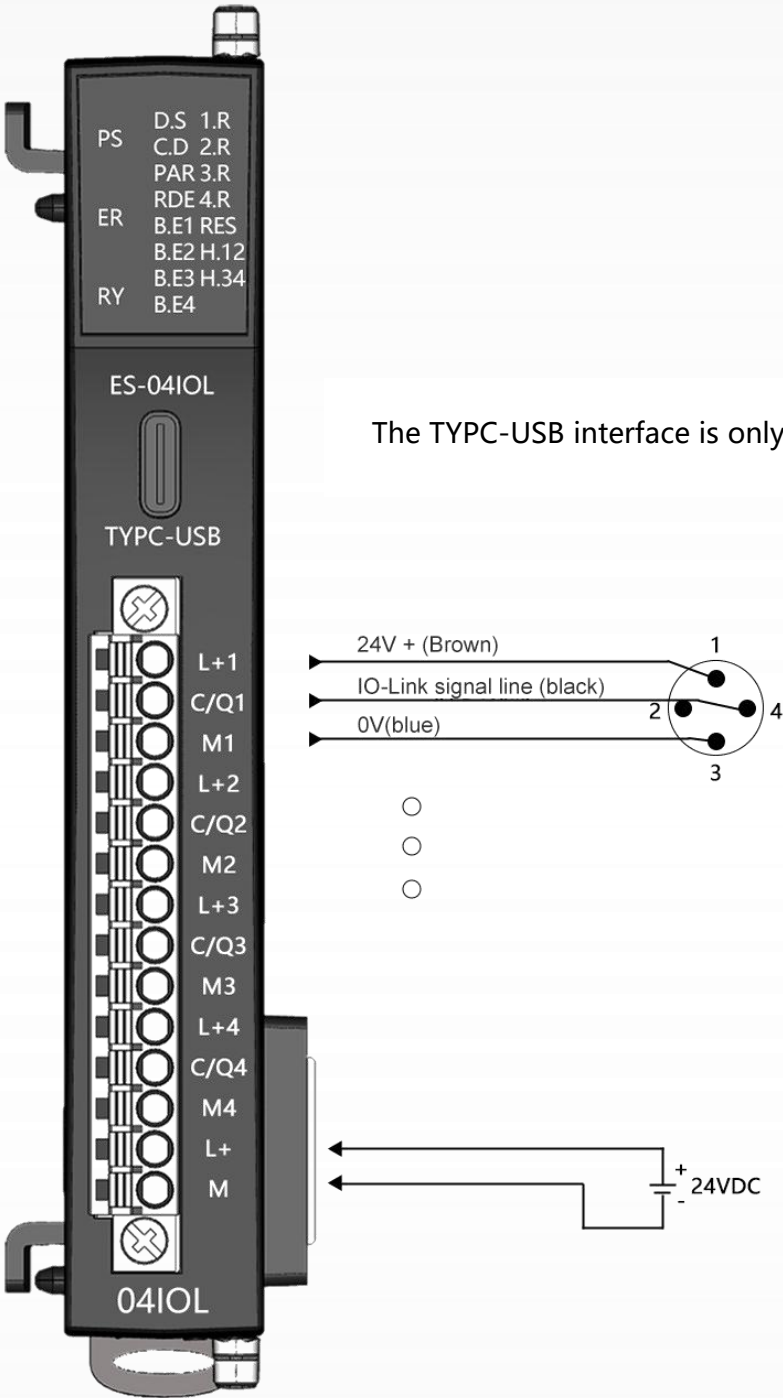

3.21.8 Define the parameters using LAE-CONFIG

Parameter Name	Format	Input range	Explanation
Chinese			
Function	Enumeration	INACTIVE: Port is closed SDCI: IOLINK communication DI: Digital input of the body DO-NPN: NPN digital output of the body DO-PNP: PNP digital output of the body	Port Function
Supplier ID	Enumeration	03DC(Hex)	Link ID of Lingke Io-link
Device ID	Decimal system	000016D1:IOL-1600X-HUB 000016D0:IOL-0016X-HUB 00008180:IOL-0808X-HUB 002008D1:IOL20-0800X-HUB 00204140:IOL20-0404X-HUB 002008D1:IOL20-0008X-HUB 002016D1:IOL20-1600X-HUB 00208180:IOL20-0808X-HUB 002016D0:IOL20-0016X-HUB	Slave Device ID
Cycle	Decimal system	Default: 6.4ms (minimum 2ms)	Cycle
Verification	Enumeration	Verification: Check the supplier ID and device ID No verification: Do not check the supplier ID and device ID	Slave Inspection
Input length	Decimal system	0~2bytes	Input Length Unit Byte
Output length	Decimal system	0~2bytes	Output Length Unit Byte
Byte swap	Enumeration	Enable: Exchange DisEnable: No exchange	Exchange Byte
Original output secure mode	Enumeration	Maintain Set one Set to zero	Body Output Security Mode
Original Pin4 input filtering	Decimal system	0~255	Body Pin4 Input Filtering

3.22 ES-3026A/ES-3026B (2-channel weighing module)


3.22.1 Module Overview

- ◆ The ES-3026A module supports 2-channel excitation voltage of 5VDC, with 4-wire or 6-wire sensor connections.
- ◆ The ES-3026B module supports 2-channel excitation voltages of 5VDC, 10VDC, with 4-wire or 6-wire sensor connections.
- ◆ Calibration mode: weight calibration, zero point and full-scale correction; multi-point (3, 4 or 5 points) linear correction.

3.22.2 Module parameter values

Hardware Specifications		
Model number	ES-3026A	ES-3026B
Backplate current	20MA	
Expansion interface Connecting the wires	2*20-pin board-to-board connector	
Installation method	I/O wiring: Max. 1.5mm ² (AWG 16)	
Model number	DN35 rail mounting	
Environmental parameters		
Working temperature	-20℃~75℃	
Environmental humidity	5% to 95% no condensation	
Protection level	IP20	
Module parameters		
Channel number	2CH	
Calibration mode	Weight calibration	Weight calibration / No calibration required mode
Sensor type	4-wire system, 6-wire system	
Excitation voltage	5VDC	5VDC , 10VDC
Measurement error	Measurement error ≤ ±0.05%	
Correction form	Weight calibration, zero point and full scale correction; multiple-point (3, 4 or 5 points) linear correction	
Sampling period	200ms	
ADC resolution	24bit	
Weighing unit	G、KG、 T	
Power-on settings	Power-on reset, power-on reset and reset on power-on	

3.22.3 Interface Introduction

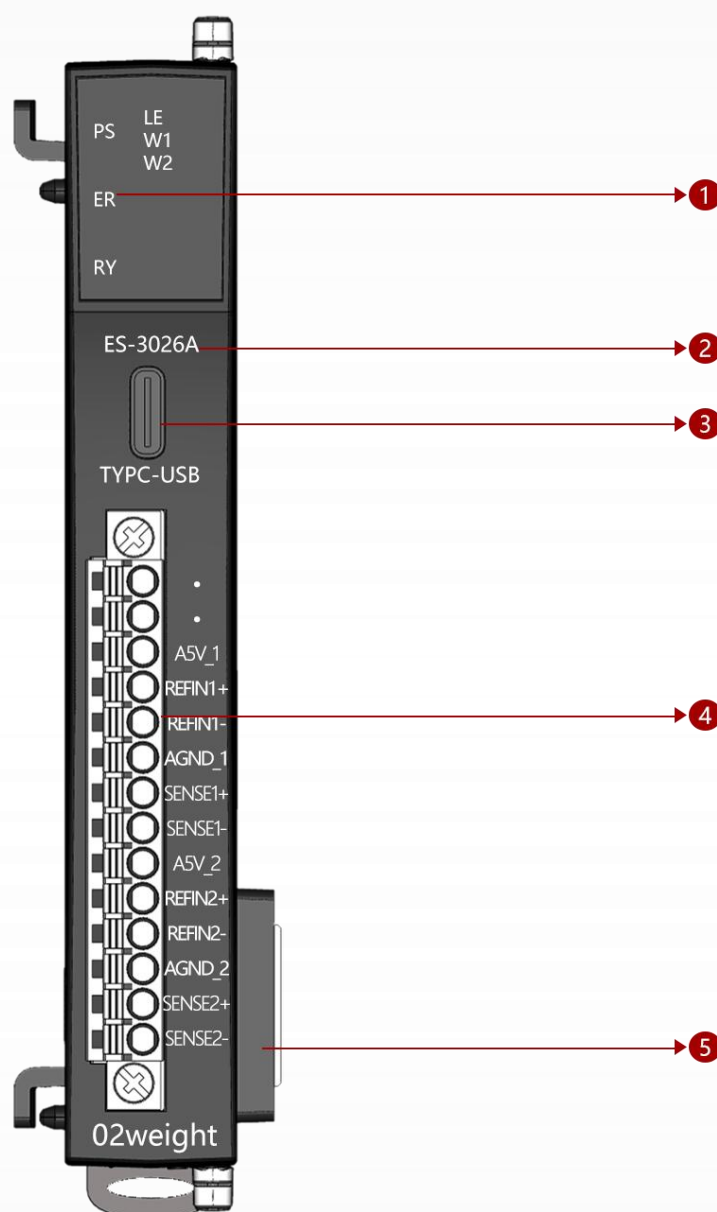

Expansion Module Interface Description

- ① Backplane system status indicator light
- ② Module model
- ③ Parameter download port
- ④ Pulse output terminal
- ⑤ Backplane expansion interface

3.18.4 LED indicators

The LED indication of the module is divided into 1 part: backplane status indication .

3.18.5 The operating status of the backplane indication system is described in the table below.

PS (Power Supply)	ER (fault)	RY (Running)	clarification
			Expansion module without power supply
			Expansion Module Backplane Initialization
			Expansion modules are functioning properly
			Expansion Module Backplane Error

Table 41 System Status Indication


 The green light is on  Flashing red  Flashing green  Not bright

Name	Colour	Description
W1	green	Weighing stability indicator for channel 1
W2	green	Weighing stability indicator for channel 2


3.22.6 Terminal connection definition

Terminal number	ES-3026	
	Symbol	Explanation
1	Null	——
2	Null	——
3	A5V_1	CH1 5V output
4	REFIN1+	CH1 reference source +
5	REFIN1-	CH1 reference source -
6	AGND_1	CH1 ground
7	SENSE1+	CH1 sensor signal input +
8	SENSE1-	CH1 sensor signal input -
9	A5V_2	CH2 5V output
10	REFIN2+	CH2 reference source +
11	REFIN2-	CH2 reference source -
12	AGND_2	CH2 ground
13	SENSE2+	CH2 sensor signal input +
14	SENSE2-	CH2 sensor signal input -

3.22.7 Wiring diagram

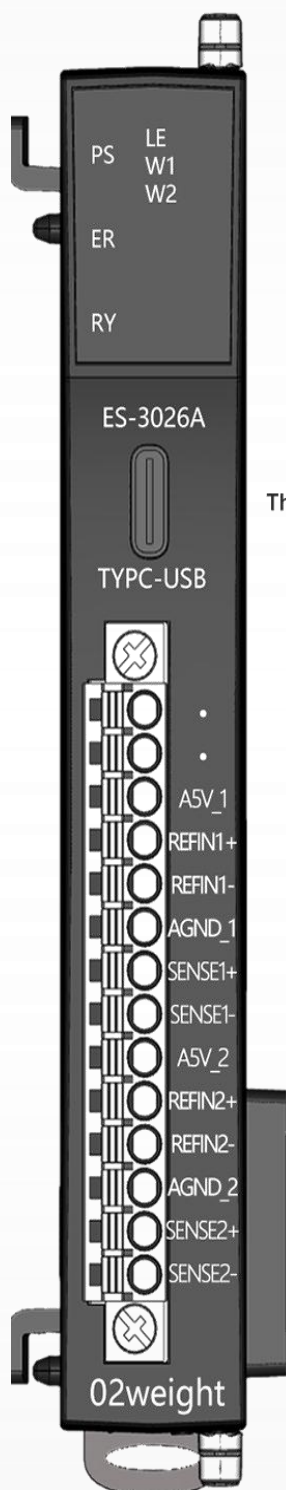

The TYPC-USB interface is only used for connecting to the LAEconfig software on the computer.

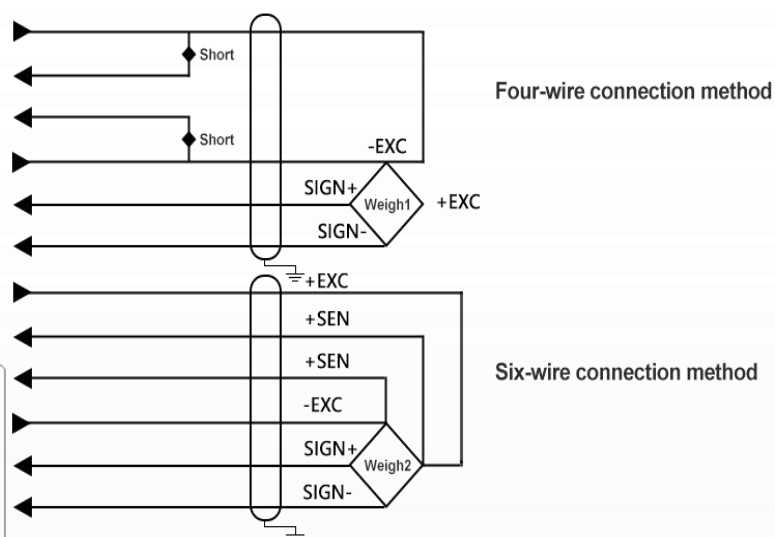

3.22.8 Process Data Definition

Input address allocation									
Channel One	BYTE 0	Net weight							
	BYTE 1								
	BYTE 2								
	BYTE 3								
	BYTE 4	Gross weight							
	BYTE 5								
	BYTE 6								
	BYTE 7								
	BYTE 8..15	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		Maintain	Maintain	Power-on reset timeout	Clean skin completed	Skin removal completed	Reset completed	Stable flag	Enable flag
		BIT 8-15							
		0: Idle, 1: Executing, 2: Command completed, 3: Error occurred while saving							
Channel Two	BYTE 16..31	Ch2 Feedback Data (Defining Parameter Ch1)							

Output address allocation									
Channel One	BYTE 0	Set the value of the stable range / Set the value of calibration 1 for the weights / Set the value of calibration 2 for the weights / Set the value of calibration 3 for the weights / Set the value of calibration 4 for the weights							
	BYTE 1								
	BYTE 2								
	BYTE 3								
	BYTE 4-5	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
		Maintain	Unit: Value is 0, g Value is 1, kg Value is 2, ton	Number of filtering cycles: Value 0: Filter once Value 01: Filter 4 times Value 02: Filter 8 times Value 03: Filter 16 times Value 04: Filter 32 times			Restore body weight	Peel off the skin	Reset
		BYTE 5							
	Mode selection: Value 0, weighing mode Value 1: Stable range Value 2: Restore factory settings Value 16: Zero point calibration Value 17: Weighing calibration 1 Value 18: Weighing calibration 2 Value 19: Weighing calibration 3 Value 20: Weighing calibration 4 Value 21: Weighing calibration completed								
Channel Two	BYTE 6..11	Ch2 Control Data (Defining Parameter Ch1)							
	BYTE 12..15	Maintain							

3.22.9 Configuration Parameter Definition

Configuration parameters		
Channel 1	BYTE 0	Weighing enable
	BYTE 1	Power-on setting
	BYTE 2	Calibration mode
	BYTE 3	Voltage value
	BYTE 4..7	Sensor sensitivity
	BYTE 8..11	Sensor range
	BYTE 12..15	Sampling gain
	BYTE 16..19	Sampling value offset
Channel 2	BYTE 20..39	CH2 configuration parameters (refer to CH1 configuration parameters)

Parameter name		Unit	Format	Value Range	Default Value
Chinese	English				
Weighing enable Power-on setting	WeightEN	-	Enumeration	0: Disabled 1: Enabled	1
Calibration mode Voltage value Sensor sensitivity	OnPowerInit	-	Enumeration	0: Power-on reset 1: Power-on reset 2: Restore factory settings on power-on	1
Sensor range Sampling gain	WeightCalibMode	-	Enumeration	0: Calibrate weights 1: No calibration (not enabled temporarily)	0
Sampling value offset Weighing enable	PowerValue	-	Enumeration	0: DC5V 1: DC12V (not enabled temporarily)	0
Power-on setting	SensorEnsitivity	mv/v	Decimal floating-point number	1~500.00mv/v	2.00mv/v
Calibration mode	Sensorcapacity	g	Decimal floating-point number	0~1.0E+8g	10000.00g
Voltage value	WeightGain	-	Decimal floating-point number	-3.4028E+038~3.4028E+038	1.00
Sensor sensitivity	WeightOffset	-	Decimal floating-point number	-3.4028E+038~3.4028E+038	0.00




4. Communication Configuration

Example

4.1 Getting Started with the LUC-PNB and S7-1200 (TIA V14) Connection


4.1.1 New projects

Power up the LUC-PNB module and S7-1214C DC/DC/DC and connect the network cable to the PC. open the Siemens TIA V14 Software. Create a new project "LUC-PN".

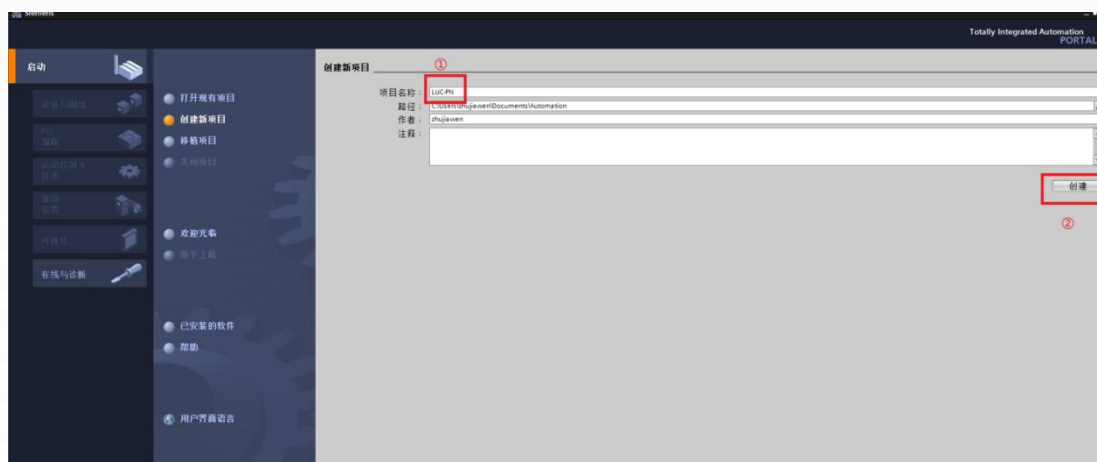


4.1.2 Adding a Siemens PLC

Enter the project view, in the device column of the project tree, click "Add new device" under the LUC-PN item, add PLC S7-1214C DC/DC/DC, and click Confirm.

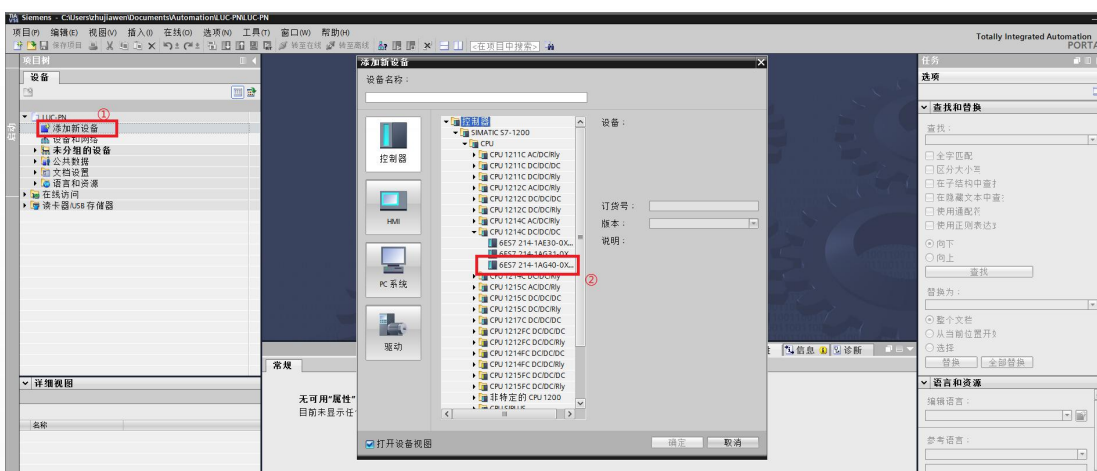


4.1.3 GSD file import

Click "Options" - "Manage Generic Station Description File GSD", in the pop-up dialog box, find the location of the GSD file of LUC-PNx, select the GSD file. Click Install, after the installation is completed, the hardware catalog will be updated automatically.

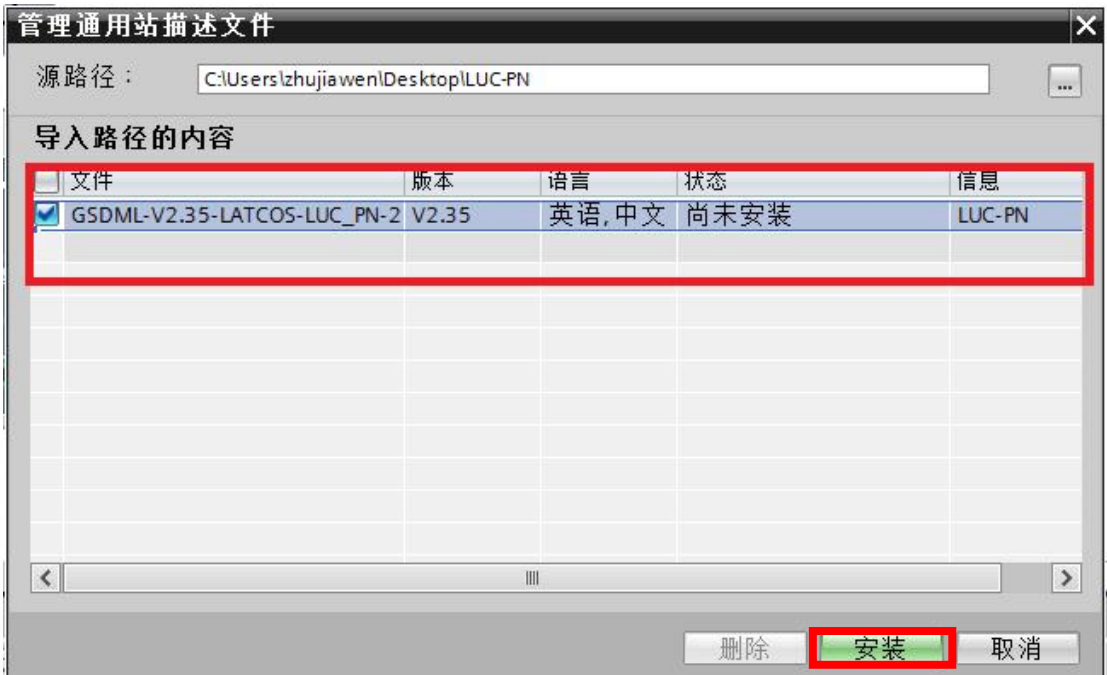


4.1.4 Setting PLC parameters

In the Device view, select the PLC network port and set the network port parameters.

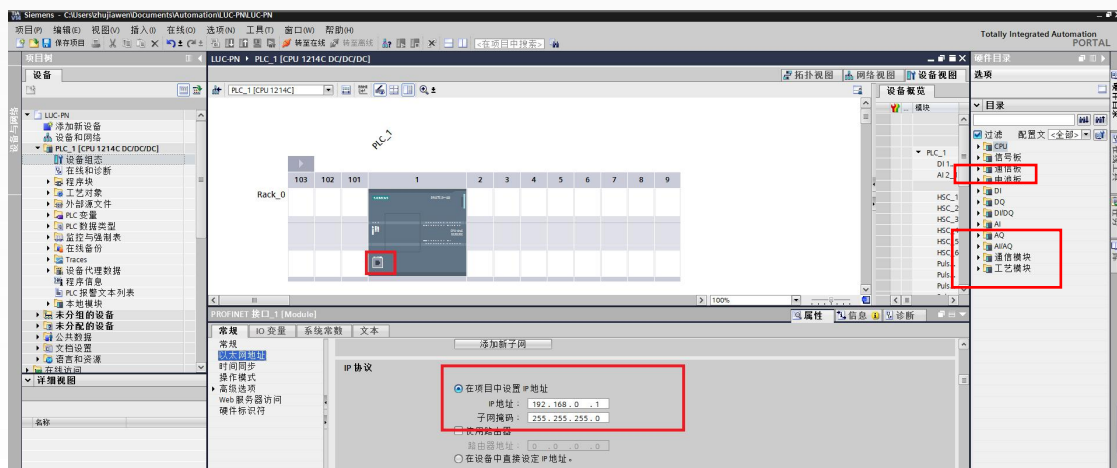


4.1.5 Adding modules

In the network view, first drag and drop the LUC-PNx module into the network view, then assign the network interface to "PLC_1. PROFINET IO-System", click on the network port, modify the Ethernet parameters, you can assign the module IP address (192.168.0.2), the module's The PROFINET device name of the module is "LUC-PN", note: the name must be the same as the internal name of the module.

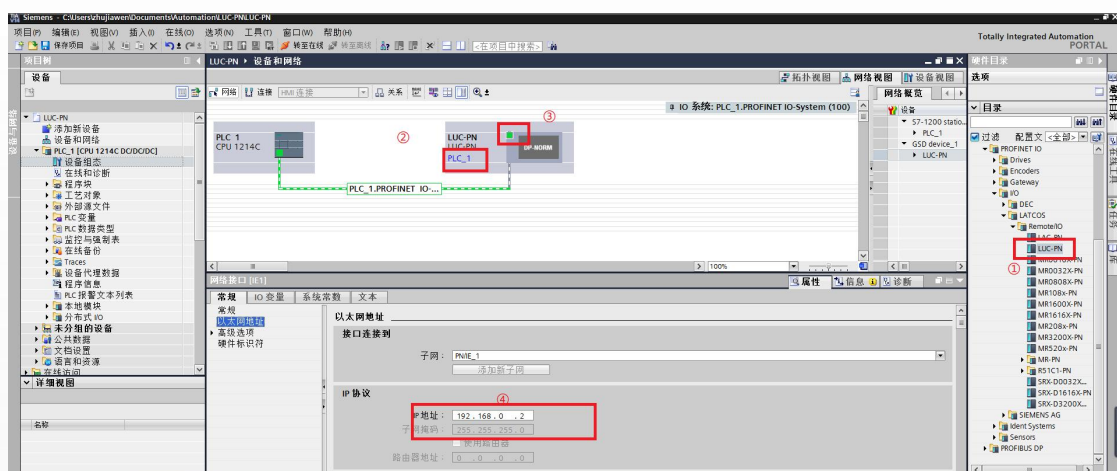


4.1.6 Modifying device names within the module

Click "Online Access" under the project tree, select your computer's network card, click "Update Accessible Devices" to refresh all the online modules, double-click Online and Diagnostics to enter the setting interface. Double-click Online and Diagnostics to enter the setting interface. Set the name and assign it.

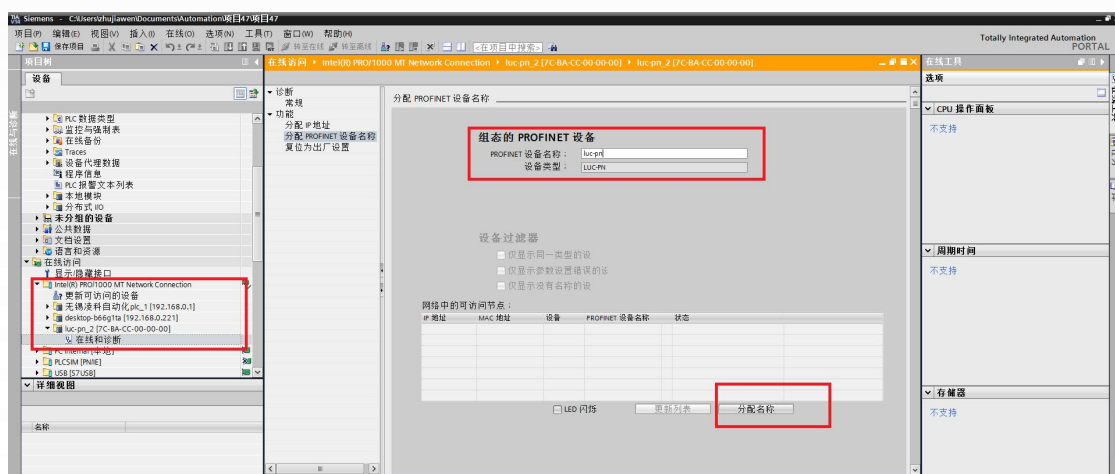


4.1.7 Insertion of extension modules

Double-click the coupler icon to enter the "Device View", and add the extended IO modules: ES1160D, ES216XD, ES3081A, ES3082A, etc. in the "Device Overview".

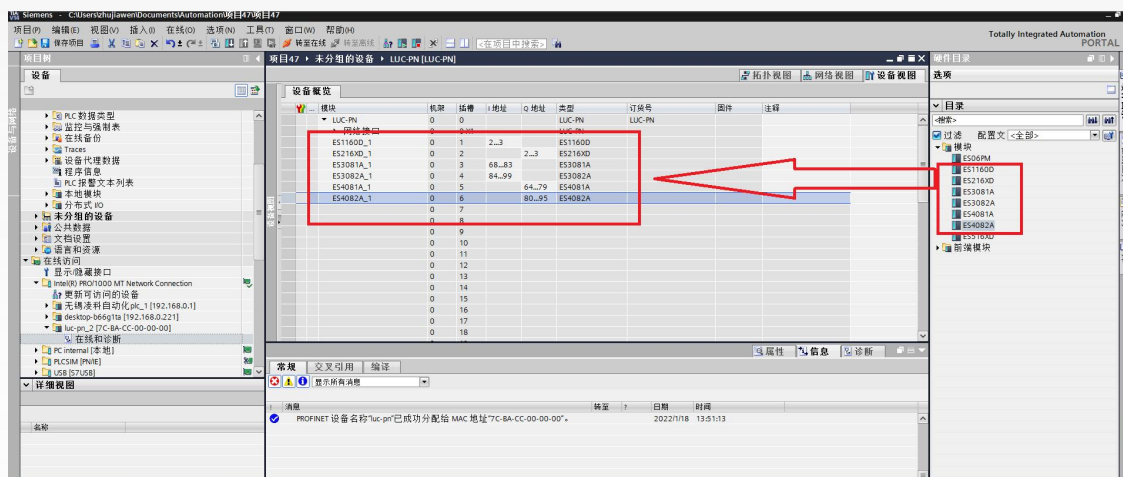

4.1.8 Expansion Module Parameter Settings

Click on the appropriate module and set the parameters inside the properties.

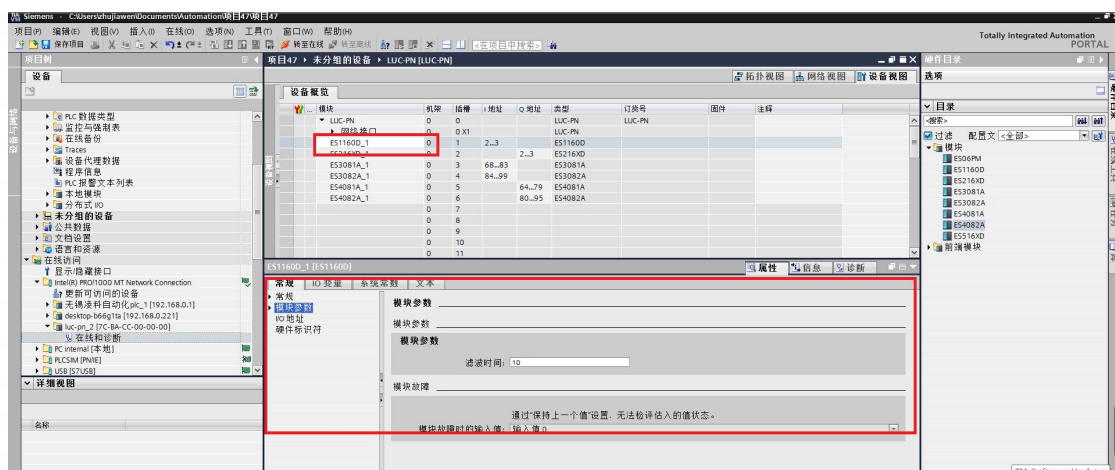

4.1.9 Hardware configuration completed

Save, compile, download. Click "Go Online". At the same time, you can add a new monitoring table and monitor the field IO values online on the monitoring table.

5.1 Communication case of LUC-EPB \ LUC-EAB \ LUC-CEB

Please go to the official website www.latcos.cn - Download Area - Download the corresponding case file in the Case tutorial.

Official website



先进自动化控制及工业网络技术



Copyright © 2023 Wuxi Latcos Automation Technology, Inc. All rights reserved.

Wuxi Lingke Automation Technology Co., Ltd. www.latcos.cn

Company Tel: **0510-85888030**